
VersiFleece® KEE HP Polyester Reinforced Membrane

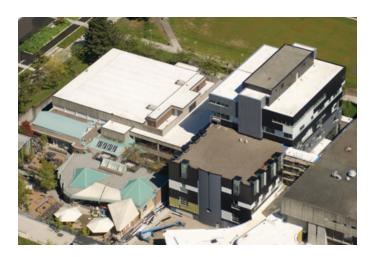

Overview

Versico's VersiFleece KEE HP (High Performance) polyester reinforced membrane is tough, durable, and versatile, making it ideal for a wide variety of re-roofing and new construction projects. Manufactured using a hot-melt extrusion process for complete scrim encapsulation, this product is available in total sheet thicknesses of 105, 115, and 135 mils.

VersiFleece KEE HP polyester reinforced membrane offers exceptional weatherability, flexibility, and toughness due to its polyester reinforcing scrim, polyester fleece backing, and DuPont® Elvaloy® KEE HP copolymer. The polyester reinforcing scrim provides the sheet with added breaking strength, tear strength and puncture resistance for fully adhered or mechanically attached applications; the fleece backing adds to the puncture-resistance of the membrane and provides a built-in separation layer against rough concrete decks or existing asphaltic-based roofing systems. Elvaloy KEE HP, a solid plasticizer that won't migrate out of the sheet over time, helps to ensure the membrane remains pliable and weldable as it ages and reduces the amount of smoke generated during the welding process.

Features and Benefits

- Available in white, gray, light gray, and tan and offered in 105-, 115-, and 135-mil thicknesses.
 - 105-mil roll size = 10' x 100'
 - 115-mil roll size = 10' x 100'
 - 135-mil roll size = 10' x 75'



- Provides superior wind uplift performance and ratings (up to FM
 1-990) due to a mechanical bond between the fleece and adhesive
- Labor-saving 10'-wide sheets result in 67% fewer seams than a modified bitumen system of comparable size, when used as a cap sheet
- Fleece backing enhances toughness, durability, and puncture-resistance
- Polyester reinforcing scrim provides exceptional puncture strength
- KEE HP membrane is highly resistant to chemical types, such as acids, restaurant oils, fats, and greases
- Passes UL-2218 Class 4 rating
- White and Light Gray KEE HP are California Title 24 compliant, and contribute toward LEED® credits
- Low-volatility KEE HP plasticizer won't migrate out of the sheet over time
- KEE HP contributes to a wide window of weldability and less smoke during the welding process

Installation

VersiFleece KEE HP polyester reinforced membrane can be installed as a fully adhered or a mechanically attached system.

Mechanically Attached Roofing System

The mechanically attached system starts with approved insulation being fastened with a minimum of 5 fasteners per 4' x 8' board. The VersiFleece KEE HP membrane is then mechanically fastened to the deck using HPVX Fasteners and HPVX Plates or HPV-XL Fasteners and HPV-XL Plates. Adjoining sheets of VersiFleece KEE HP membrane are overlapped over the fasteners and plates and joined together with a minimum $1\frac{1}{2}$ "-wide hot-air weld.

Adhered Roofing System - Low Rise Foam

Insulation is mechanically fastened or adhered with Flexible DASH Adhesive to the roof deck. Spray-apply, splatter, or extrude adhesive onto the substrate, and allow foam to develop string/body/gel prior to setting VersiFleece membrane into the adhesive. Roll VersiFleece membrane with a 30"-wide, 150-pound (68 kg) segmented weighted roller to ensure full embedment. Splices are hot-air welded.

Adhered Roofing System - Water Based

HydroBond[™] can be applied to the approved substrate with a medium nap roller. Once the adhesive has been applied, roll the membrane in place. To prevent over-drying, Versico recommends applying the adhesive 3'–4' at a time ahead of the roll. Immediately broom the membrane starting from the center and working out to the sides of the sheet using a soft bristle push broom to work out any air bubbles. Immediately after brooming, roll the adhered membrane in two directions in a crossways pattern using a minimum 150-lb (68 kg) segmented membrane roller.

VersiFleece KEE HP Polyester Reinforced Membrane

Adhered Roofing System - Multiple-Ply

Insulation is mechanically fastened or adhered with Flexible DASH Adhesive, Type III, IV, or modified asphalt to the roof deck. When adhering insulation with asphalt, the insulation boards are limited to 4' x 4'. Cover boards are required over the insulation for hot asphalt installations. If a two-ply system is specified, install the SureMB Modified Base Ply with hot asphalt or Versico Cold Applied Adhesive over an approved substrate. Apply VersiFleece KEE HP cap sheet membrane over the base ply substrate with Flexible DASH Adhesive, Versico Cold Applied Adhesive, SBS, or SEBS Type III or IV asphalt. VersiFleece KEE HP cap sheet membrane may be adhered directly to existing smooth BUR, mineral cap sheet, or SBS modified bitumen after priming the surface with cutback asphalt primer.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Supplemental Approvals, Statements, and Characteristics

 VersiFleece KEE HP meets or exceeds the requirements of ASTM D4434 Standard Specification for Poly (Vinyl Chloride) Sheet Roofing. VersiFleece KEE HP is classified as a Type III or a Type IV as defined by ASTM D4434.

Precautions

- Use proper stacking procedures to ensure sufficient stability of the materials.
- 2. Exercise caution when walking on wet membrane; membranes may be slippery when wet.
- Sunglasses which filter out ultraviolet light are strongly recommended since white surfaces are highly reflective to sunlight. Roofing technicians should dress appropriately and wear sunscreen.
- 4. White surfaces reflect heat and may become slippery due to frost and ice accumulation.
- Care must be exercised when working close to a roof edge, particularly when the surrounding area is snow-covered, as the roof edge may not be clearly visible.
- 6. VersiFleece membrane rolls must be tarped and elevated to keep them dry prior to installation. If the fleece gets wet, use a wet vac system to help remove moisture from the fleece.
- KEE HP membrane that has been exposed to the weather must be prepared with Versico's PVC & KEE HP Membrane Cleaner prior to hot-air welding.

Radiative Properties for Cool Roof Rating Council (CRRC), and LEED

Physical Property	Test Method	White KEE HP	Tan KEE HP	Gray KEE HP	Light Gray KEE HP
CRRC - Initial Solar Reflectance	ASTM C1549	0.87	0.73	0.58	Pending
CRRC - Solar Reflectance after 3 years	ASTM C1549 (uncleaned)	0.71*	0.60*	0.50*	Pending
CRRC - Initial Thermal Emittance	ASTM C1371	0.89	0.88	0.88	Pending
CRRC - Thermal Emittance after 3 years	ASTM C1371 (uncleaned)	0.87*	0.86*	0.84*	Pending
Solar Reflective Index (SRI)	ASTM E1980	110	90	69	Pending
Solar Reflective Index (SRI) SRI after 3 years	ASTM E1980	88	71*	56*	Pending

^{*}Rapid Ratings



VersiFleece KEE HP Polyester Reinforced Membrane

Typical Properties and Characteristics

Physical Property	ASTM D4434 Requirement	105-mil	115-mil	135-mil
Thickness over fleece	No requirement	50-mil	60-mil	80-mil
Membrane Thickness Over Scrim, in. (mm) ASTM D4434 optical method, average of 3 areas	0.016 min (0.40)	0.024 (0.61)	0.029 (0.74)	0.036 (0.91)
Weight, lbs/ft² (kg/m²)	No requirement	0.38	0.46	0.59
Breaking strength (MD x CD), lbf/in (kN/m) ASTM D751 grab method	200 min (35)	410 x 360 (72 x 63)	450 x 410 (79 x 72)	500 x 490 (87 x 86)
Elongation break of reinforcement (MD x CD), % ASTM D751 grab method	15 x 15 min For reinforcing fabric only	35 x 30	35 x 30	35 x 30
Tearing strength (MD x CD), lbf (N) ASTM D751 proc. B, 8 in. x 8 in.	45 min (200)	178 x 162 (791 x 720)	147 x 174 (653 x 774)	152 x 183 (676 x 814)
Low temperature bend, ASTM D2135, no cracks 5x at -40°C	PASS	PASS	PASS	PASS
Linear dimensional change, % ASTM D1204, 6 hours at 176°F	±0.5 max	0.4 typ.	0.4 typ.	0.4 typ.
Water absorption resistance, mass % ASTM D570, 166 hours at 158°F water	±3.0 max	1.25	0.87	0.89
Puncture resistance - Dynamic, J (ft-lbf) ASTM D5635	20 (14.7)	32.5	40	42.5
Puncture resistance - Static, lbf (N) ASTM D5602	33 (145)	63.99	63.99	63.99
Puncture Resistance - Federal Puncture (Max. Load in lbf) FTM 101C	No requirement	332	384	482
Xenon-Arc resistance, no cracks/crazing 10x, ASTM G155 0.35 W/m ² at 340-nm, 63°C B.P.T. 12,600 kJ/m ² total radiant exposure 10,000 hours	PASS	PASS	PASS	PASS
Properties after heat aging, ASTM D3045, 56 days at 176°F, Breaking strength, % retained Elongation reinf., % retained	90 min 90 min	90 min 90 min	90 min 90 min	90 min 90 min

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

LEED Information

Pre-consumer Recycled Content	10%			
Post-consumer Recycled Content	0%			
Manufacturing Location	Greenville, IL			
Solar Reflectance Index (SRI), Initial	White: 110, Tan: 90, Gray: 69, Light Gray: Pending			



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com