


**CAUTION** DETAIL NOT FOR USE ON 25 OR 30-YEAR WARRANTY PROJECTS, PRE-FABRICATED/PRE-MOLDED ACCESSORIES MUST BE UTILIZED. ACCEPTABLE FLASHING SHALL CONFORM WITH PVC UNIVERSAL DETAIL U-15A OR U-15G.



**WHEN USING 80-MIL (2.03mm) THICK MEMBRANE**  
 APPLY A 4- 1/2" (11.43cm) DIAMETER "T- JOINT" COVER AT FIELD SPLICE INTERSECTIONS, CENTRALLY ALIGNED.

DIMENSIONS	cm	
(A)	6"	15 APPROX.
(B)	6"- 9"	15- 23

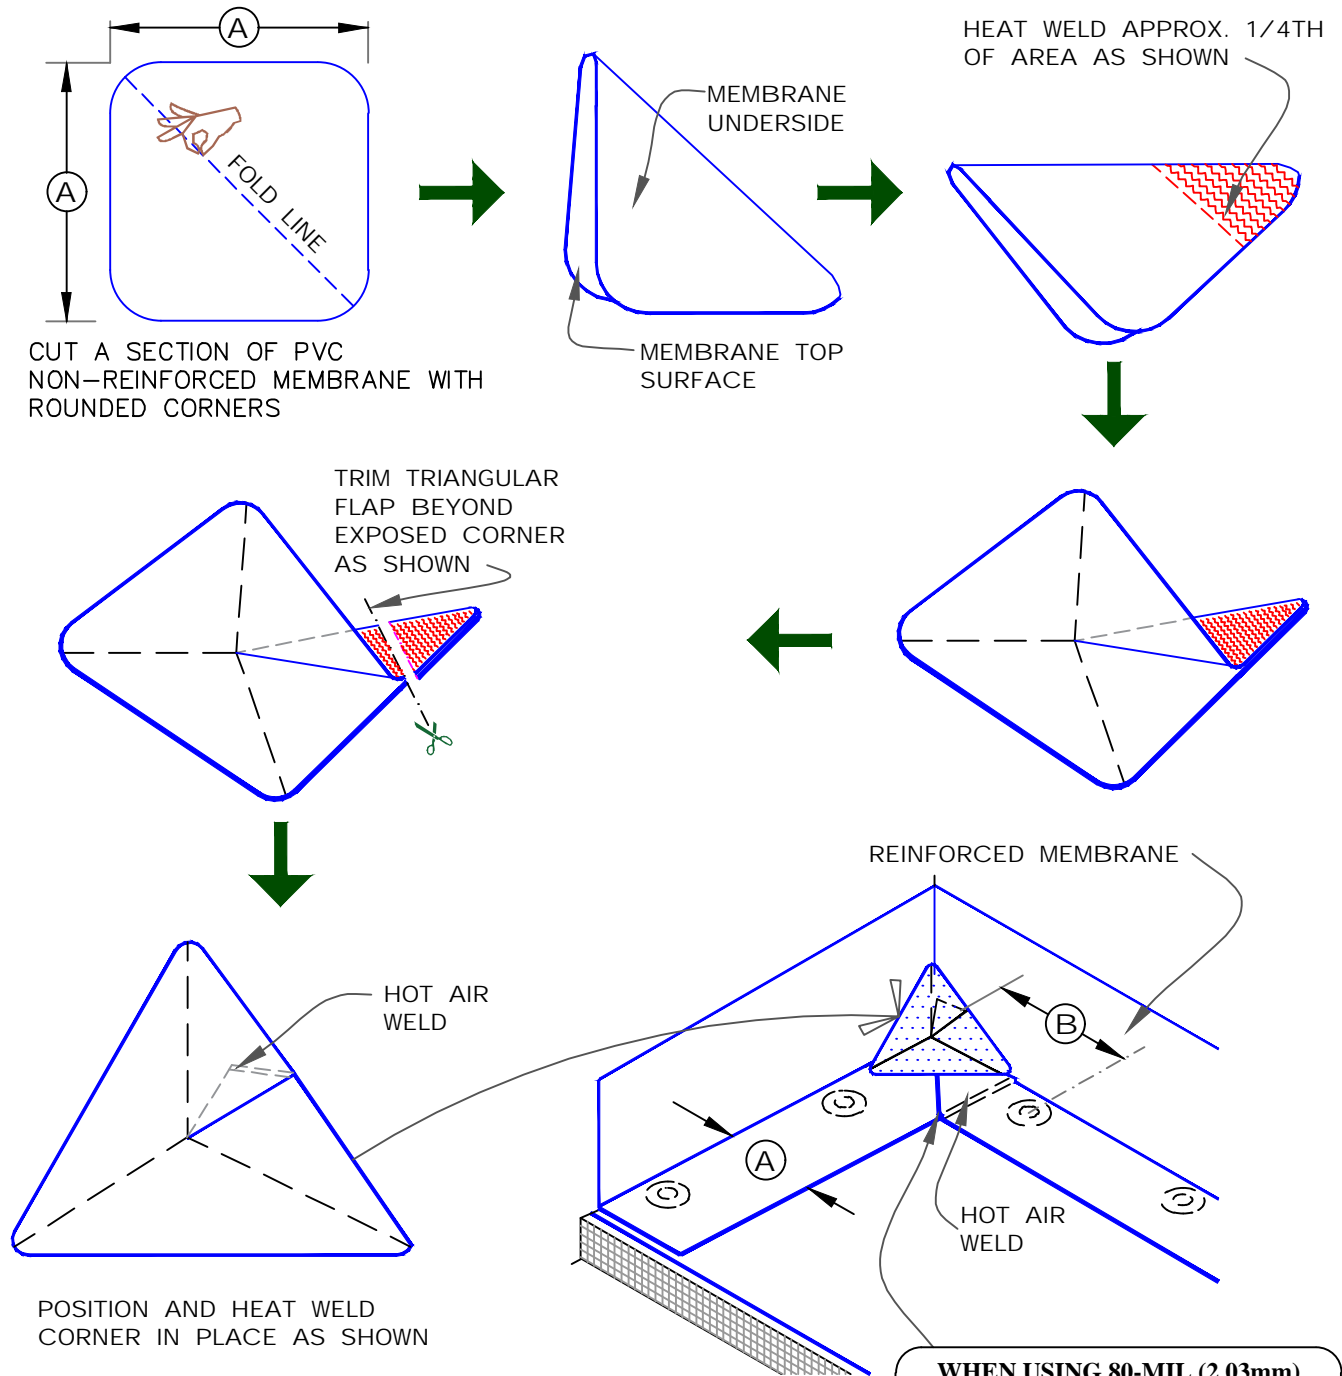

FIELD FABRICATED INSIDE CORNER FLASHING

MAXIMUM WARRANTY: 20 YEARS. SEE CAUTION ON TOP OF PAGE

DETAIL NO. **U- 15B**  
 U (Universal Detail)