


# PRE-CUT HIP AND VALLEYS

## For Tapered Polyiso Systems

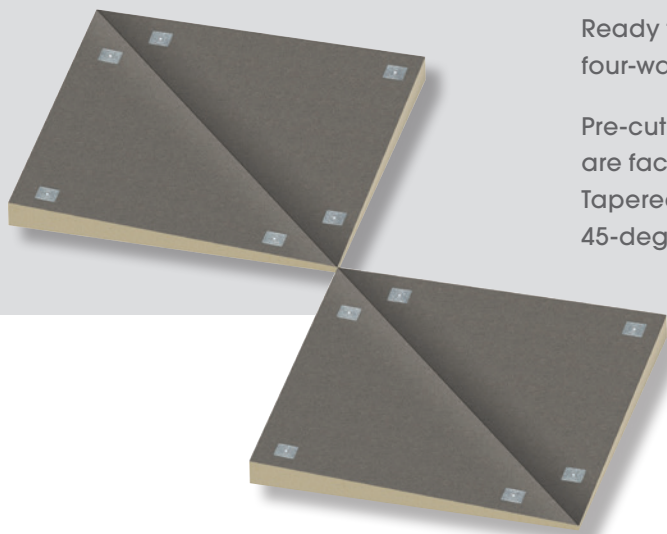

Ready to install, Pre-cut Hips and Valleys designed specifically for four-way tapered polyiso installations.

Pre-cut Hips (slope outward) and Pre-cut Valleys (slope inward) are factory produced using two 4' x 4' panels of VersiCore® Tapered, or Tapered SecurShield®, and then cut in half at a 45-degree angle. Only the two halves that you need are shipped.

### Advantages:

- Clean factory-cut edges
- Less material to ship, hoist, stack and move
- Saves labor - no cutting necessary
- Less Waste


### Features and Benefits:

- Labor savings - no field cuts required
- No waste, reducing material removal fees on jobsite
- Individually packaged and labeled
- Custom-designed to meet your jobsite requirements including slope, minimum and maximum thickness

### Available in Slopes:

- 1/16" (2mm)
- 3/16" (5mm)
- 3/8" (10mm)
- 1/8" (3mm)
- 1/4" (6mm)
- 1/2" (12mm)


### Valley Field Fabrication

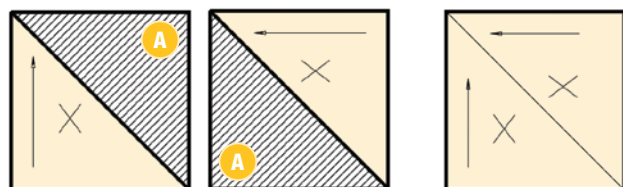

Discard Piece **A** for Valley Fabrication

Completed Valley

### Hip Field Fabrication

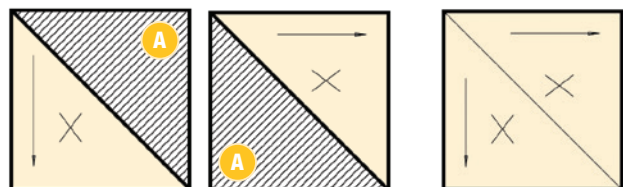

Discard Piece **A** for Hip Fabrication

Completed Hip

### Project Specifications

Roof Area 401 squares Tapered Insulation Slope ¼" per foot; ½" minimum at drains			
Field Fabricated Hips and Valleys		Pre-Cut Hips and Valleys	
Tapered Quote	\$72,800	Tapered Quote	\$72,800
Hoist, stage and move ½ truck of additional waste (3 man-hours*)	\$150		
Labor to cut 1 truck of tapered materials (84 man-hours*)	\$4,200	Additional cost for Pre-Cut Hips and Valleys	\$2,800
Waste Removal Cost: 50 cubic yards	\$1,100		
	\$5,450		
TOTAL COST: \$78,250		TOTAL COST: \$75,600	
Savings from using Pre-Cut Hips and Valleys: \$2,650			

\*Man-hours calculated at \$50.00



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com