


VersiCore® Tapered Polyiso

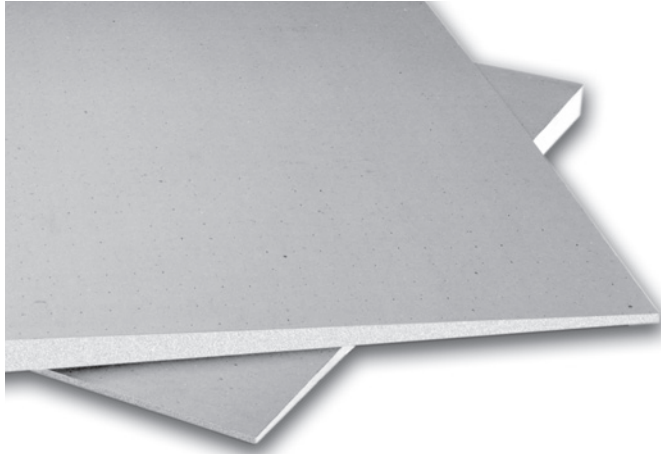

Overview

VersiCore Tapered is a sloped rigid roof insulation panel composed of a closed cell polyisocyanurate foam core bonded to glass reinforced felt (GRF) facers.

Features and Benefits

- VersiCore Tapered polyiso insulation provides the highest R-value per inch of commercially available insulation products
- Environmentally friendly construction with 0% ozone depleting components and CFC free
- Approved for direct application to steel decks


Panel Characteristics

- Available in 4' x 4' (1220 mm x 1220 mm) in thickness of 1/2" (12 mm) minimum to 4.5" (115 mm) maximum
- Available slopes (per foot):
 - 1/8" (3 mm)
 - 1/4" (6 mm)
 - 3/8" (10 mm)
 - 1/2" (12 mm)


Applications

Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)

Standard Panel Profiles

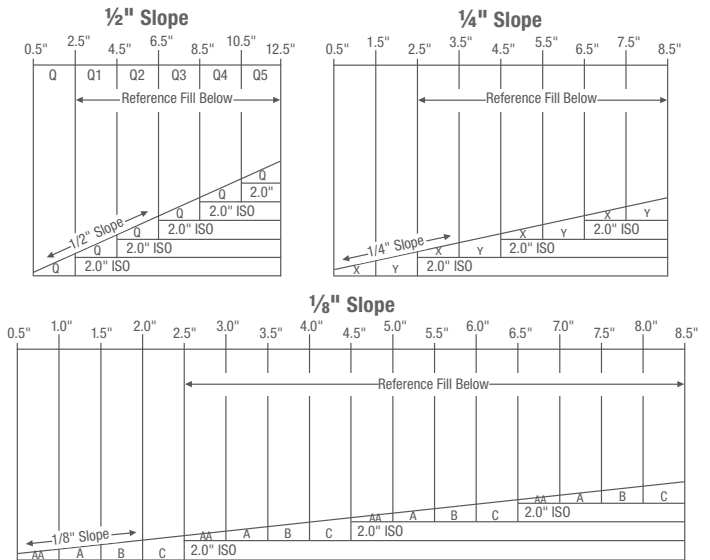

Extended Panel Profiles

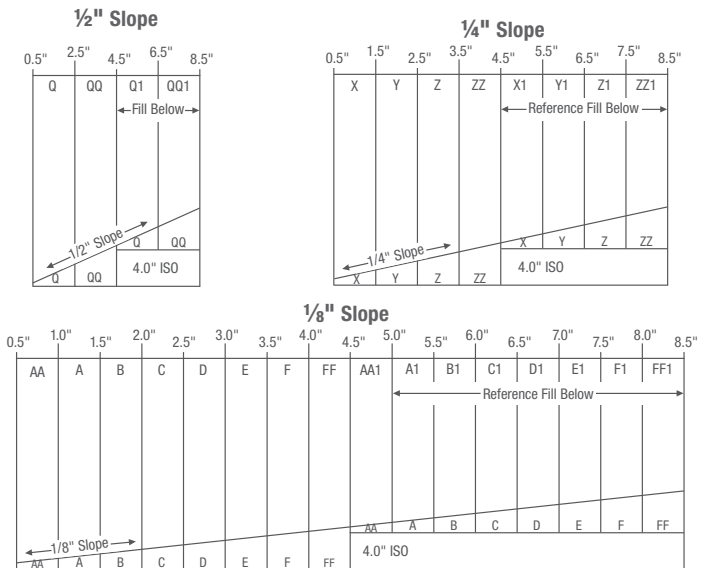

VersiCore Tapered Polyiso

Installation

Ballasted Single-Ply Systems

Each VersiCore Tapered panel is loosely laid on the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

Mechanically Attached & Fully Adhered Single-Ply Systems

Secure each VersiCore Tapered panel to the roof deck with Versico's Flexible DASH™ adhesive or the appropriate plate and fastener. Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Codes and Approvals

- ASTM C1289, Type II, Class 1, Grade 2 (20 psi), Grade 3 (25 psi)
- International Building Code (IBC) Section 2603
- UL Standard 790, 263 and 1256: Component of Class A Roof Systems (refer to UL Roof Materials' system directory)
- CAN/ULC S704, Type 2 & 3, Class 2
- Third-party certification with the PIMA QualityMark™ for Long-Term Thermal Resistance (LTTR) values
- FM® Standards 4450/4470: Class 1 approval for steel roof-deck constructions (refer to FM RoofNav)
- FLORIDA BUILDING CODE APPROVAL FL#1296
- MIAMI-DADE COUNTY, FLORIDA NOA NO: 04-1018.01

Sustainable Attributes

Versico's focus has always been innovation - Innovation to solve problems, improve performance, reduce labor, and above all, improve sustainability. Versico is committed to driving sustainable and efficient processes in the design and manufacturing of our products.

- Highest R-value per inch providing maximum energy savings and CO2 emissions avoidance
- PIMA QualityMark™ Certification Program participant for Long-Term Thermal R-values (LTTR)
- CDPH Compliant for maximum allowable concentrations of target VOCs

- Versico Polyiso Roof Insulation and HD Cover Board EPDs available
- Contributes to LEED and Green Globes certification requirements
- End-of-life jobsite disposal options are available for re-use/re-purposing
- Zero ozone-depleting components, HFC- and HCFC-free formulation


Precautions

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof-covering material. Versico will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the jobsite or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Versico for more specific details, or refer to PIMA Technical Bulletin No. 109: Storage & Handling Recommendations for Polyiso Roof Insulation.

Typical Properties and Characteristics

Property	Test Method	Value
Compressive Strength	ASTM D1621 ASTM 1289	20 psi minimum (138 kPa, Grade 2)
Dimensional Stability	ASTM D2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E96 12.10	<1 perm (57.5ng/(Pa*s*m²))
Water Absorption	ASTM C209	<1% volume
Service Temperature		-100° to 250°F (-73°C to 122°C)

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.



Foamed plastic as roof deck construction material with resistance to an internal fire exposure only for use in construction no.(s) 120 and 123. See UL Directory of Products Certified for Canada and UL Roofing Materials and Systems Directory. 99DL.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com