

NOTES:

- REMOVE ALL GRAVEL AT TIE-IN.
- SPLICE TWO PIECES OF WHITE PRESSURE
 -SENSITIVE UNCURED FLASHING TOGETHER TO ACHIEVE DESIRED WIDTH.


 WATER CUT-OFF MASTIC MUST BE HELD UNDER CONSTANT COMPRESSION.

4. VERSICO IS NOT
RESPONSIBLE FOR DAMAGE
TO THE BUILT—UP ROOF
OR STRUCTURAL DECK
RESULTING FROM PONDED
WATER; THIS DETAIL
APPLIES TO RE—ROOFING
WHEN A TEAR—OFF IS NOT
SPECIFIED AND WAS
DESIGNED TO PREVENT
MIGRATION OF WATER
WITHIN THE NEW ROOFING
SYSTEM.

5. ACHIEVE SMOOTH SURFACE ON TOP.

(STRUCTURAL CONCRETE DECK)			
OPTION	FASTENER	PLATE	
А	CD-10	HPVX	
В	MP 14-10	HPVX	

DIMENSIONS		cm	
\bigcirc	6"	15	MIN.
B	2"	5	±1/2"(1.5cm)
0	6"	15	MIN.
0	12"	30	MAX.

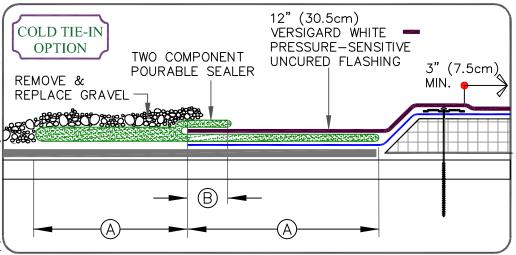



TPO TIE-IN TO BUILT-UP ROOFING OVER CONCRETE ROOF DECK

MAXIMUM WARRANTY: 30 YEARS



PS (PRESSURE SENSITIVE) P&S (PEEL & STICK) QA (QUICK APPLIED)

THERMOPLASTIC ROOFING SYSTEM

TPC-13.2