
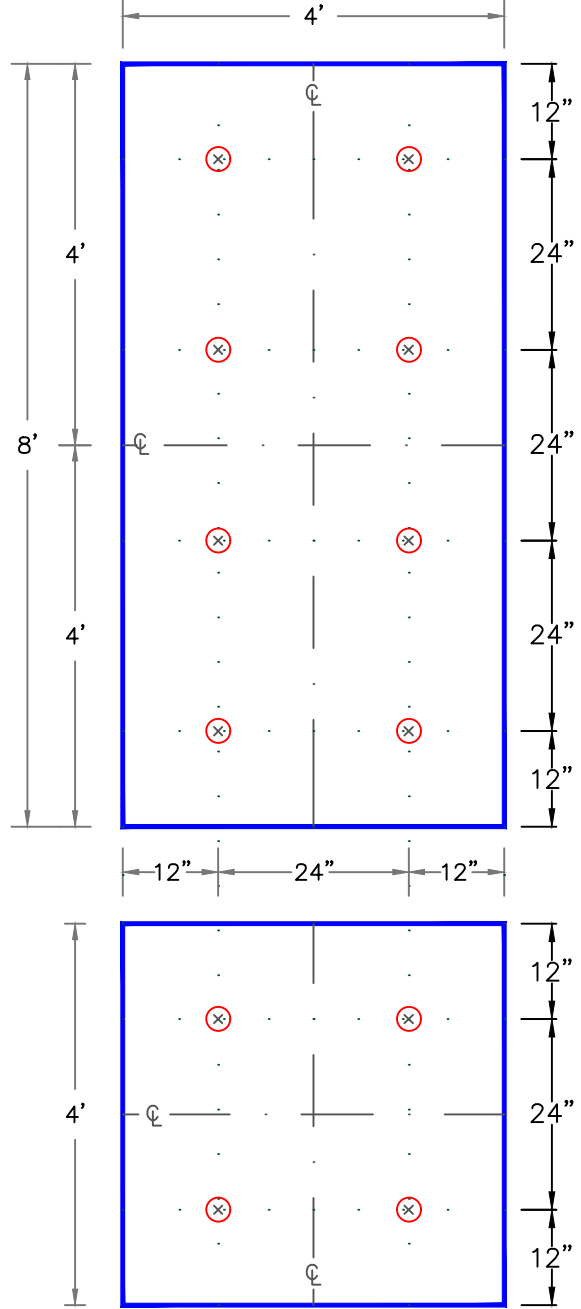


NEW CONSTRUCTION OR RE-ROOF/TEAR OFF
PROJECTS WITH SECUROCK, DENS-DECK, RECOVERY
BOARD OR ANY
VERSICO APPROVED INSULATION MIN 1-1/2"
(38mm) THICK

RE-ROOF/NO TEAR OFF PROJECTS WITH
POLYISOCYANURATE LESS THAN 1-1/2"
(38mm) THICK

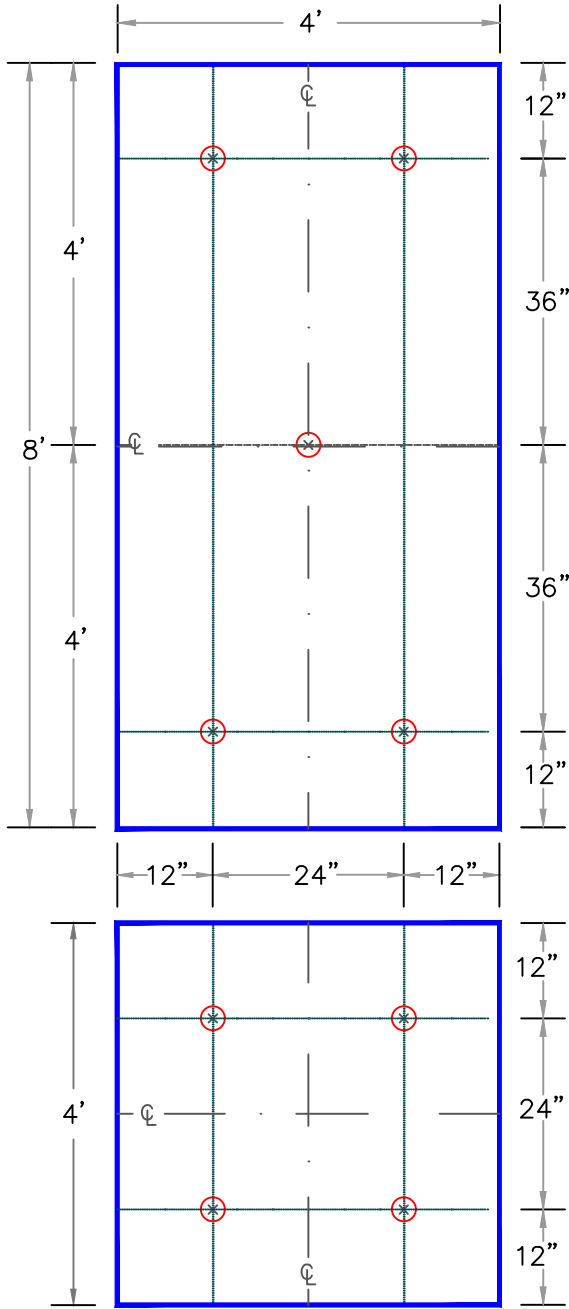

NOTE:

FOR CRITERIA ON INSULATION FASTENERS AND PLATES, REFER TO VERSICO SPECIFICATIONS.

FEET TO CENTIMETERS		INCHES TO CENTIMETERS																	
4'	8'	inch	1/4"	1/2"	3/4"	1"	1.5"	2"	2.5"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
122	244	cm	1	1.5	2	2.5	4	5	6.5	7.5	10	13	15	18	20	23	25	28	30



INSULATION/COVER BOARD ATTACHMENT FOR ALL WARRANTY DURATIONS

- FASTENER & PLATE
- CENTER LINE
- GUIDE LINE

MECHANICALLY ATTACHED SYSTEM

MA-27