


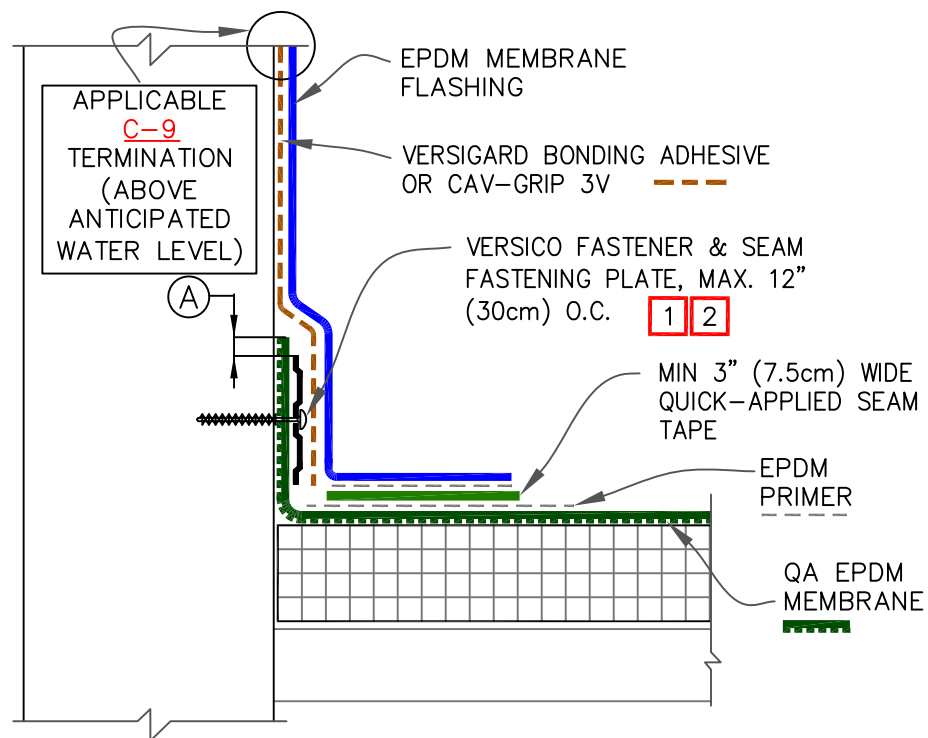

DIMENSION	cm	
(A)	1/8"–1"	0.5–2.5
(B)	3"	7.5

NOTES:

1. SEAM FASTENING PLATE/FASTENER MAY BE INSTALLED INTO THE STRUCTURAL DECK ALSO.
2. FASTENERS AND PLATES REQUIRED AT 6" (7.5cm) O.C. FOR WARRANTY WIND SPEEDS EXCEEDING 90 MPH.
3. APPLY QUICK-APPLIED UNCURED EPDM FLASHING COVERING VERTICAL SPLICE INTERSECTIONS.

VERSIGARD BONDING
ADHESIVE OR CAV-GRIP 3V

