


WARRANTY
REQUIREMENTS

20 YEAR WARRANTY

SEE DETAIL BELOW


25 OR 30 YEAR WARRANTY

USE ONLY TPO PREFABRICATED ACCESSORIES

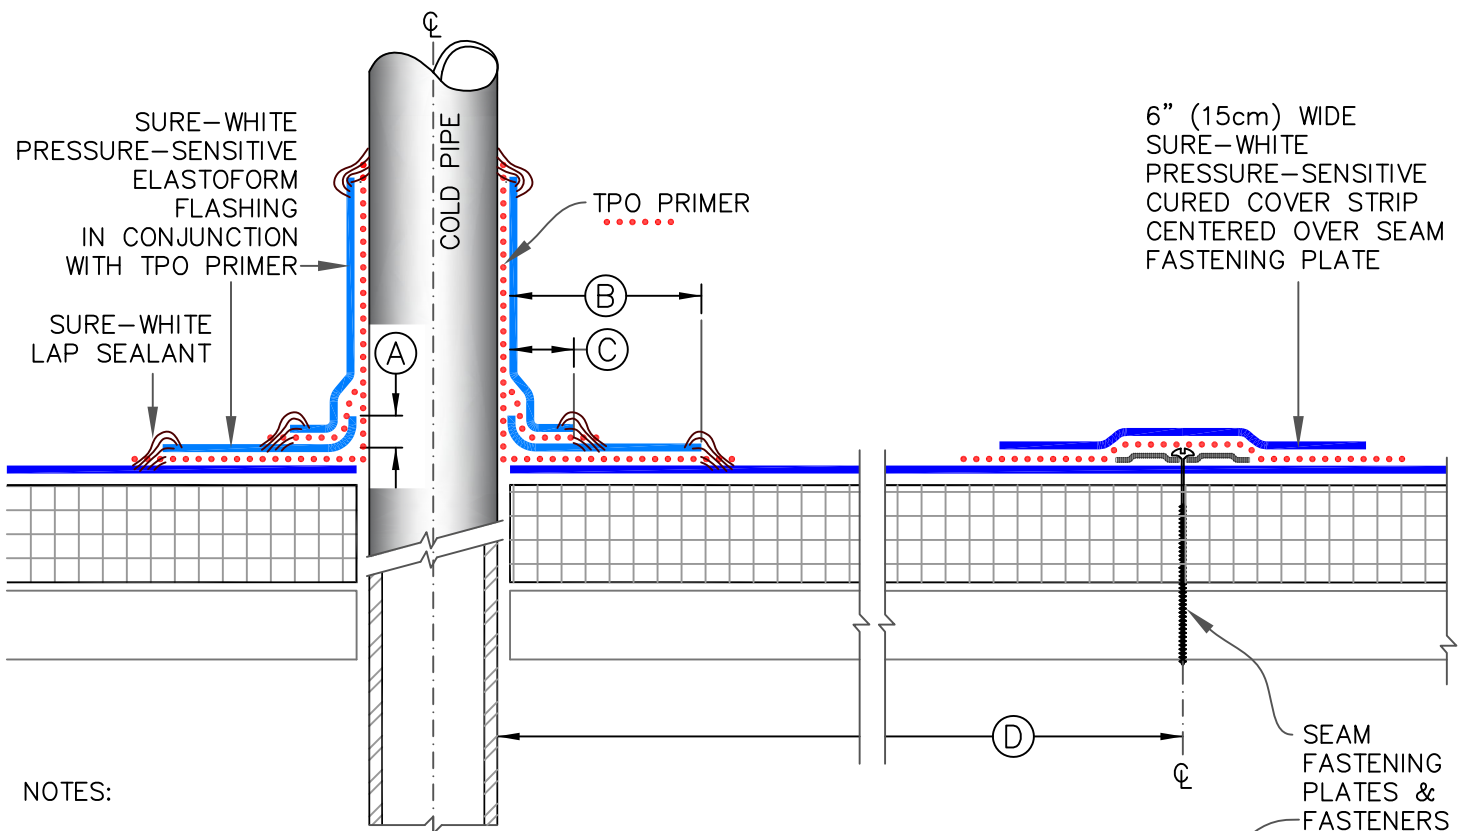


NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING PRESSURE-SENSITIVE ELASTOFORM FLASHING.
2. TEMPERATURE OF THE PIPE PENETRATION MUST NOT EXCEED 180°F (82°C).
3. FASTENERS/PLATES ARE NOT REQUIRED ON ADHERED SYSTEMS UNLESS PIPE DIAMETER EXCEEDS 18" (50cm).
4. ON MECHANICALLY FASTENED SYSTEMS, HP-X FASTENERS AND PIRANHA PLATES OR HP-XTRA FASTENERS AND PIRANHA XTRA PLATES ARE REQUIRED OVER STEEL AND WOOD DECKS. ON CONCRETE DECKS, CD-10 OR HD 14-10 FASTENERS ARE USED WITH PIRANHA PLATES.
5. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PRESSURE-SENSITIVE ELASTOFORM FLASHING.

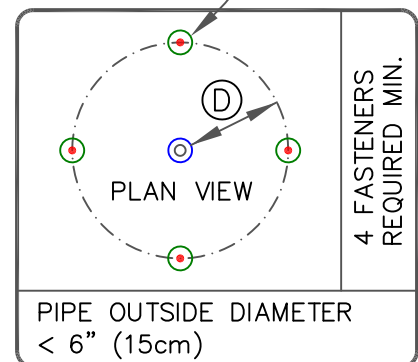

DIMENSIONS		cm	
(A)	1/2"	1.5	
(B)	3"	7.5	
(C)	1"	2.5	
(D)	6"	15	T0
	12"	30	
(E)	12"	30	MAX.

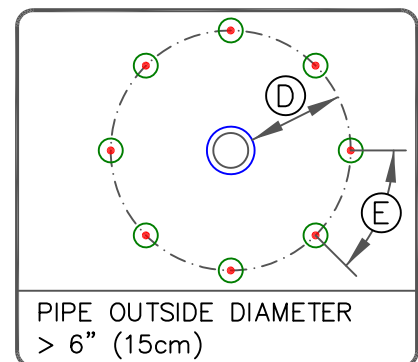

FIELD FABRICATED PIPE SEAL

MAXIMUM WARRANTY: 20 YEARS



DETAIL NO.

MF-8BT

THERMOPLASTIC TPO