


## NOTES:

1. REFER TO VERSICO SPECIFICATIONS FOR ACCEPTABLE VERSICO FASTENERS AND PLATES.
2. MECHANICAL SECUREMENT MAY BE INSTALLED INTO THE VERTICAL SUBSTRATE.
3. WHEN USING 80 MIL (2.03mm) THICK CURB FLASHING, THE INTERSECTIONS BETWEEN SPLICES MUST OVERLAID WITH A TPO "T-JOINT" COVER.
4. APPROXIMATELY 1/8" (0.5cm) DIAMETER BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANE.

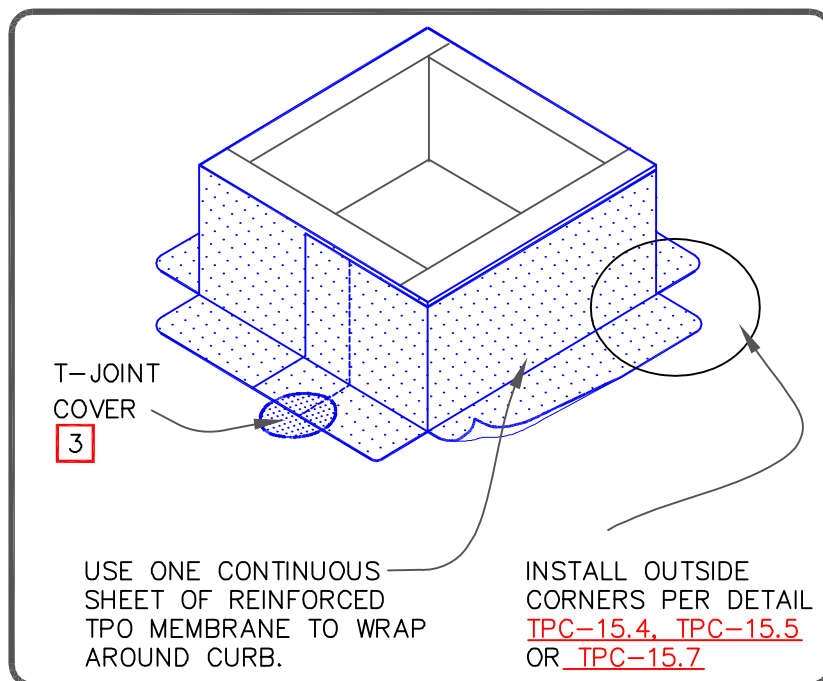

CURB FLASHING WITH TPO MEMBRANE

MAXIMUM WARRANTY: 30 YEARS

— TPO MEMBRANE

— APPROVED SUBSTRATE

0 — SEE NOTE

PS (PRESSURE SENSITIVE)

P&S (PEEL & STICK)

QA (QUICK APPLIED)

THERMOPLASTIC ROOFING SYSTEM

TPC-5.1