
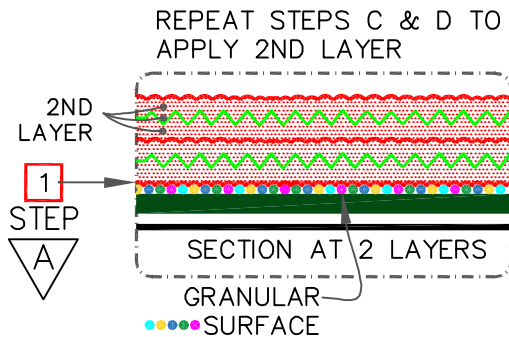



HEM, MIN. 1/4" (6.3mm)
MIN. 3/4" (19mm)



STEP D FOR EACH LAYER OF FLEECE APPLY A 2ND (TOP COAT) OF LIQUISEAL Liquid Flashing Resin, PER PUBLISHED COVERAGE RATE ENSURING THE FLEECE IS COMPLETELY SATURATED


STEP C IMMEDIATELY PRESS LIQUISEAL Flashing Fleece, INTO THE APPLIED LIQUISEAL Liquid Flashing Resin TAKING CARE AT CORNERS AND TIGHT SPACES

STEP B APPLY BASE LAYER OF LIQUISEAL Liquid Flashing Resin PER PUBLISHED COVERAGE RATE

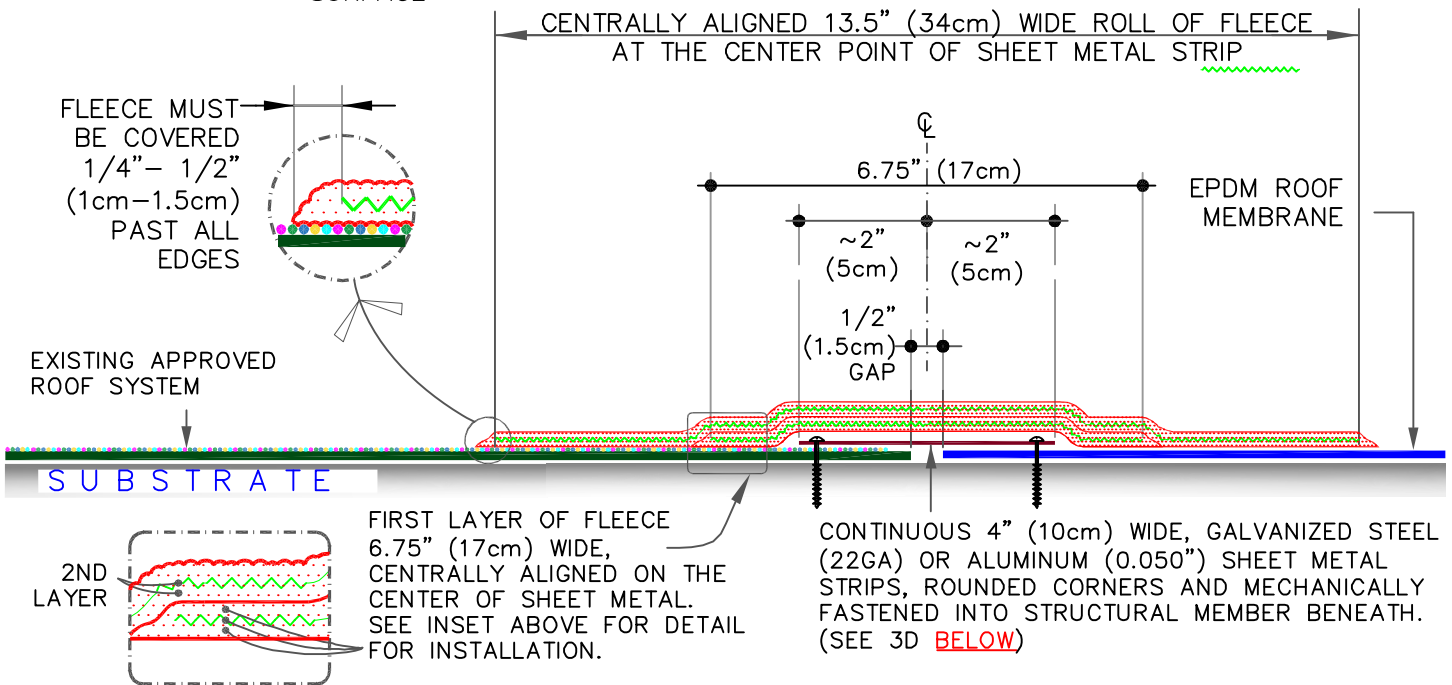

NOTES:

1. REFER TO ATTACHMENTS 1 & 2 FOR DETAILED INSPECTION, CLEANING AND PRIMING FOR DIFFERENT MATERIALS WITHIN THE FLASHING AREAS.
2. IF FLUTES ARE PERPENDICULAR DRILL A 3/8" (1cm) WEEP HOLE IN THE BOTTOM FLUTES OF THE STEEL DECK ALONG THE TIE IN.
3. DETAIL NOT FOR USE ON WARRANTY PROJECTS EXCEEDING 20-YEARS. UNLESS OTHERWISE SPECIFIED.

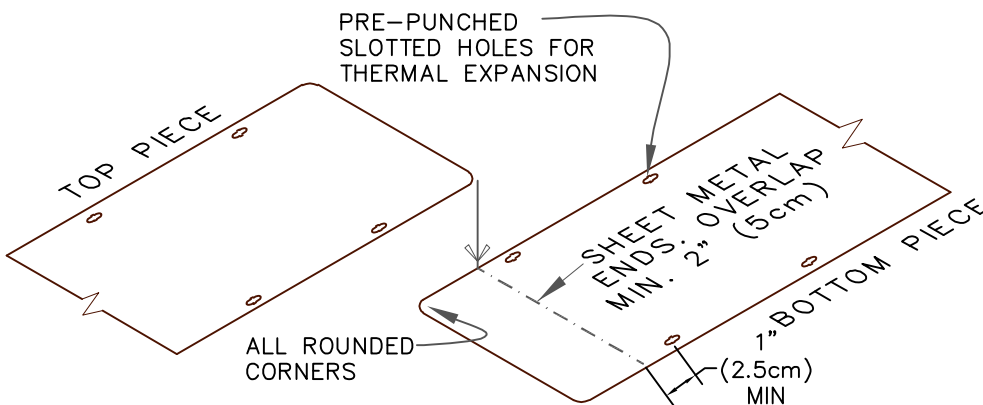

	<p>EPDM MEMBRANE TIE-IN WITH EXISTING ROOF OVER STEEL DECK</p> <p>For additional information, refer to Specifications</p>		<p>DETAIL NO.</p> <p>LF-13.1</p> <p>LIQUID FLASHING</p>
--	---	--	---