


## SECUREDGE CRIMP-ON CANTED FASCIA

**CRIMP-ON, SINGLE-PLY VERSION** 

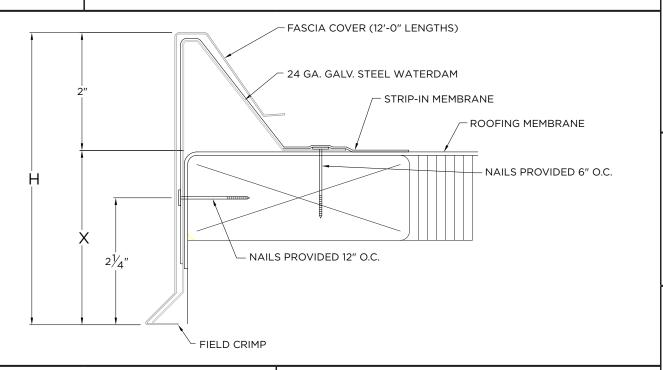

## **DIMENSIONS**

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ FA-50	5"	3"	1 NAILER
FA-65	6 1/2"	4 1/2"	2 NAILERS
FA-80	8"	6"	3 NAILERS
☐ FA-95	9 1/2"	7 1/2"	4 NAILERS
☐ FA-110	11"	9"	5 NAILERS
☐ FA-125	12 1/2"	10 1/2"	6 NAILERS

## **MATERIAL**

OTHER:

24 Ga. Galv. Steel
🗌 22 Ga. Galv. Steel
□ .040" Aluminum
☐.050" Aluminum

☐ .050" Aluminum	
☐.063" Aluminum	

Color: _		
Finish:		

<b>Substrate:</b>	☐ Wood
If substrate is not given, wood fasteners	☐ Masonry
will be provided.	☐ Metal

### **QUANTITIES**

 Lineal Feet (12'-0" Lengths)
Outside Miter (90°)

 o decide i iitoi (o o	•
Inside Miter (90°)	

Right Endcaps
---------------

Ιαft	Endc	anc
LEI	LIIUC	aps

## \_\_\_\_\_ Right Endwall Flashing

Left	Endwall	Flashing

Accessory	Type:
-----------	-------

- ☐ Quicklock (Default)
- ☐ Welded (Surcharge)

# \_\_\_\_ Overflow Scupper Style A Style B

Spillout	Scupper
Style A	Style E

Downspout	Scupper
Style A	Style B

Downspout Sizex
Max. Downspout Size is 5" x 6"
Custom print needed for larger sizes.
Style A=Tapered 1.5" Drop   Style B=Flat

### **NOTES**

- Fascia includes splice plate at joints
- Standard fascia will not function with TPO or PVC strip-in membrane thicker than .060"
- Oil canning can occur on larger face heights; recommend .050"" or .063"" for face heights above 8"
- Welded accessories require minimum material thickness of .050"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 196 psf

### **APPROVALS**





#### ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

$\mathbf{n}$	$\frown$			-
$\nu_{\kappa}$		IECT	11/41	-()

Date:

**Customer Service** 

866-458-3537

(Metal-Era)

FROSECT III	•
Project Name:	
Architect:	
Roofing Contractor:	
Project Type:	
By selecting this box you confirmed that dimens are correct. All	ou have verified and ions, sizes, and quantities
products will be installed in strict accordance with	SHT #: of
printed instructions.	DATE: 09/13/24

DRN BY: JJC

DWG #: \_ 15010-21585

CKD BY:

MM