


Pressure-Sensitive Pourable Sealer Pockets

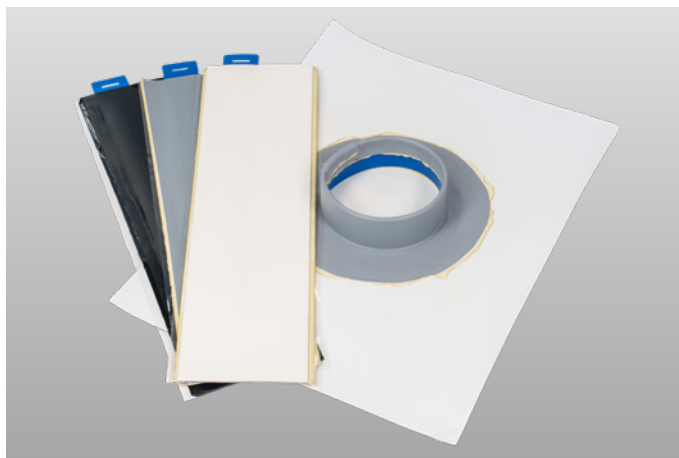

Overview

Sure-Seal® and Sure-White® EPDM Pressure-Sensitive (PS) Pourable Sealer Pockets are prefabricated pockets consisting of a 2" (50 mm)-wide plastic support strip with SecurTAPE™-backed Elastoform Flashing®.

Features and Benefits

- » Pourable Sealer Pockets are ideal for sealing irregular, hard-to-flash penetrations through the membrane.
- » Available in:
 - 4" (100 mm): Black
 - 6" (150 mm): Black, White and Gray
 - 8" (200 mm): Black and White
- » Several pockets can be combined to create larger pockets as needed

Installation

1. All penetrations must be a minimum of 1" (25 mm) from the pourable sealer pocket.
2. Securement is required for pockets greater than 18" (450 mm) in diameter. Refer to specifications.
3. Pourable Sealer to be minimum 2" (50 mm) deep.
4. See appropriate installation guide. Refer to Carlisle U-16A detail.
5. Pockets can be stacked two high if necessary to achieve greater height.
6. The entire surface where the PS Pourable Sealer Pocket and sealant will be applied must be clean. The adhesive on the back of the PS

Pourable Sealer Pocket and the sealer will not adhere to dusted or dirty surfaces. Any residual contamination will be detrimental to the bond strength of the adhesive and sealer.

7. Remove all foreign material.
 - a. Remove excess mica dust by brooming or wiping with a clean, dry rag or a Carlisle HP Splice Wipe.
 - b. Clean all mating surfaces with Weathered Membrane Cleaner and allow to dry.


Note: Permeation-resistant gloves (that meet ANSI/ISEA 105-2005) are required for hand protection when cleaners or primers are being used.
 - c. Allow the membrane to dry thoroughly before proceeding.
8. Application of HP-250, TPO Primer, or Low-VOC EPDM Primer
 - a. Standard EPDM Membrane – Apply the primer with a clean HP Splice Wipe (or equivalent). Scrub the area of the membrane where the PS Pourable Sealer Pocket is to be applied in a circular motion to achieve a thin, even coating on the membrane. The properly cleaned/primed area will be uniform in color without streaks and free of globs or puddles.
 - b. Pre-Kleened™ EPDM or TPO Membrane – Roller-apply the primer to the membrane with a short nap-length paint roller. The coated area will be free of globs or puddles. Prime all surfaces inside the pocket with the appropriate primer, including the deck membrane, penetration and uncured elastoform flashing that will come in contact with the Pourable Sealer. **Primer should not be applied to the blue plastic strip that forms the inside wall of the Pourable Sealer Pocket.**

Note: The use of excessive amounts of primer will not significantly enhance the adhesion of the PS Pourable Sealer Pocket to the membrane. Use only the amount necessary to obtain 100% coverage of the area where the PS Pourable Sealer Pocket will be applied.

9. Allow the primer to flash-off until it does not transfer to a dry finger touch. Install the PS Pourable Sealer Pocket as soon as the primer flashes off to minimize potential dust contamination and promote adhesion in colder weather.
10. Fill the pocket with the either one-part Pourable Sealer or properly mixed two-part Pourable Sealer and crown the surface to prevent ponded water.

Review Carlisle specifications and details for complete installation information.

Pressure-Sensitive Pourable Sealer Pockets

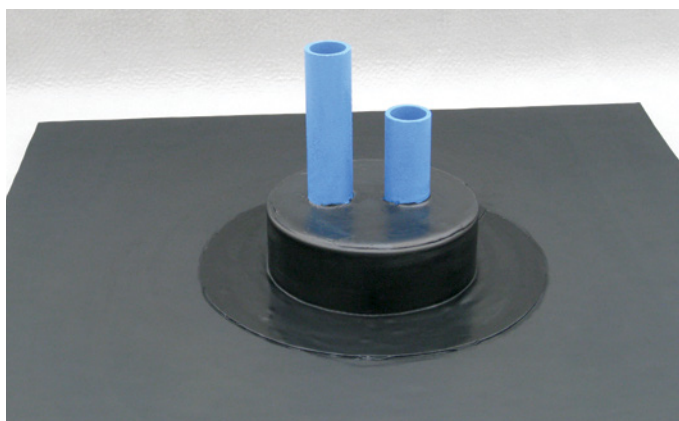

Precautions

- » Avoid prolonged contact with skin. In case of contact with skin, thoroughly wash affected area with soap and water.
- » Pressure-Sensitive Pourable Sealer Pockets must be stored in a dry area. Flashing must be stored below 80°F (27°C) to ensure maximum formability and shelf life.
- » Jobsite storage temperatures in excess of 90°F (32°C) for more than 5 days will shorten product shelf life.
- » In warm, sunny weather, keep Pressure-Sensitive Pourable Sealer Pockets in their box and in a shaded area until ready to use.
- » Storage and use of Pressure-Sensitive Pourable Sealer Pockets at temperatures below 40°F (4°C) will result in a loss of adhesive tack and, in extreme cases, will result in no bond to the substrate. Overnight storage must be available to keep the temperature of the Pressure-Sensitive Pourable Sealer Pockets at a minimum of 60°F (15°C). Hot boxes for jobsite storage must be provided to maintain a minimum product temperature of 40°F (4°C).
- » A heat gun is required when forming Pressure-Sensitive Pourable Sealer Pockets in colder temperatures or when nearing the shelf life.
- » Due to solvent flash-off, condensation may form on applied primer when the ambient temperature is near the dew point. If condensation develops, the application of primer and Pressure-Sensitive Pourable Sealer Pockets must be discontinued as proper adhesion will not be achieved. Allow the surface to dry and reapply primer to the previously coated surface. Apply Pressure-Sensitive Pourable Sealer Pockets when conditions allow.
- » Do not allow waste products (petroleum, grease, oil, solvents, vegetable or mineral oils, animal fats, etc.) or direct steam venting to come in contact with the Pressure-Sensitive Pourable Sealer Pockets.
- » KEEP OUT OF THE REACH OF CHILDREN.

Typical Properties and Characteristics

Material Color	Black, White, or Gray
Size/Weight	4" – 5 lbs/carton of 12 pcs. (2 kg) 6" – 7 lbs/carton of 12 pcs. (3 kg) 8" – 9 lbs/carton of 12 pcs. (4 kg)
Shelf Life	9 months when stored between 60°–80°F (15°–27°C)

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

Sure-Seal and Sure-White Pressure-Sensitive Pourable Sealer Pockets meets or exceeds the minimum requirements set forth by ASTM D4811 for a Type 1 (EPDM). Class V (cures on the roof) flashing material.

LEED® Information

Pre-consumer Recycled Content	2% (Sure-Seal Black Only)
Post-consumer Recycled Content	0%
Manufacturing Location	Greenville, IL
Solar Reflectance Index (SRI)	N/A