


Term Bar Nail-In

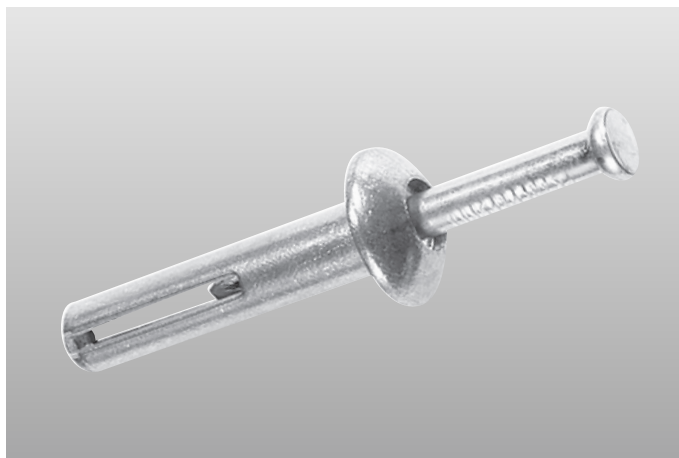

Overview

The Term Bar Nail-In is designed for use with Versico's Termination Bar or Seam Fastening Plates to attach membrane to concrete block, brick or structural concrete walls. A zinc plated steel pin is used to provide excellent corrosion resistance while the zinc alloy body provides excellent holding power.

Features and Benefits

- Zinc alloy body
- Zinc plated steel pin
- Round mushroom shape head

Installation

1. Drill a pilot hole with a standard 1/4" diameter masonry drill bit. (The pilot hole must be pre-drilled to a sufficient depth to prevent contact between the fastener tip and any accumulate dust in the pre-drilled hole.
2. Insert Term Bar Nail-In through the mounting holes in the termination bar or seam plate and into the pre-drilled hole.
3. Tap Gently until anchor body head is set tightly against the termination bar or sea plate.
4. Hammer the drive pin flush with the head to expand the anchor body.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Precautions

Eye protection is recommended during drilling and installation.

Typical Properties and Characteristics

Property	Value
Size (inches)	1 1/4" x 1/4" (30mm x 6mm)
Weight/Ctn. (lb)	22 (10 Kg)
Packaging Fasteners/Ctn.	1,000