


Carlisle Recycling Reference Guide

Need to Recycle Carlisle Materials from Jobsites?

Post-Consumer Products Recycling Opportunities	Roof Assembly Type	Contact for Recycling	Special Requirements
EPDM Membrane	Ballasted & Mechanically Fastened	Nationwide Foam Recycling	Membrane
TPO Membrane	Mechanically Fastened	Richard Garrison 888-820-2760	» No seams, flashings,
PVC Membrane	Mechanically Fastened	richard@nationwidefoam.com	adhesives or metal
Polyisocyanurate Insulation	Ballasted & Mechanically Fastened	Repurposed Materials Damon Carson	» Fold or roll onto a pallet
Expanded Polystyrene Insulation (EPS)	All	303-321-1471	Insulation
	All All	damon@repurposedmaterialsinc.com	» Only full sheets
Extruded Polystyrene Insulation (XPS)	All	East of Mississippi River: Disposal Alternatives	» No broken, wet or
Wood Fiber Board	Ballasted & Mechanically Fastened	Ron Gluck	contaminated boards
Gypsum Board	Ballasted & Mechanically Fastened	617-975-2000 ron@disposalalternatives.net	See reverse side for details
Flexible FAST [™] Dual Tanks, CAV-GRIP [®] III, and CAV-GRIP PVC standard cylinders		See CleanEarth recycling locations on reverse side	12 cylinder min.
CAV-PRIME			26 cylinder min.
Flexible FAST 15-Gallon Drums	New Roofing Installations		9 drum min.
Flexible FAST 50-Gallon Drums			4 drum min.
Large (#85) CAV-GRIP III and CAV-GRIP PVC cylinders		Carlisle 434-847-5671 canister@choiceadhesivescorp.com	12 cylinder min.
Ballast	Ballasted	Landscape companies local to the building Vac-it-all.com 800-368-8440	

Other CCM Recycled Materials

Post-Consumer Products Recycling Opportunities	Building Materials Type	Contact for Recycling			
Snap Clad, Tite-Loc, Tite-Loc Plus, Snap-On, PAC 150, PAC T-250, Redi-Roof	Roofs				
PAC-750 Soffit, PAC850 Soffit, Flush Soffit, Reveal Soffit	Soffits	Local jobsite municipality recycling facility			
Metal Flush Panels, Reveal Panels, M42/M36 Panels, R36 Panels, 7.2 Panels, $\frac{1}{2}$ " and $\frac{7}{8}$ " Corrugated Panels, Precision Series HWP, Highline, Box Rib, Tiles	Walls				

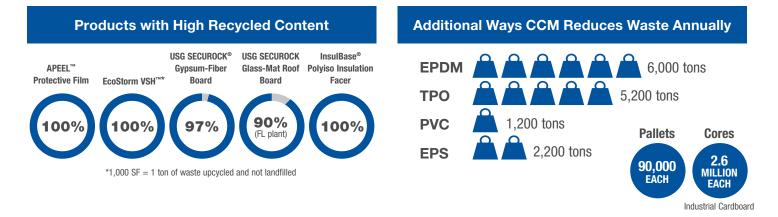



Carlisle Recycling Reference Guide



Membrane Requirements

- » Membrane must be flexible and free of contaminants like adhesive, asphalt, facer, fasteners, plates, stones, and mold
- » Cut and remove seam overlaps, tapes, flashings and patches
- » Fold or roll membrane so it fits squarely on a standard 48" x 40" wooden pallet. Stack membrane to 3' high.
- » Secure membrane to the pallet

Insulation Requirements

- » Insulation must be full, intact sheets that are dry and free of adhesive, membrane or mold.
- » No wet or broken boards
- » Stack on dunnage or pallets to 4' high
- » Secure insulation by taping the stack together

Cylinder and Drum Requirements

- All containers must be empty and placed on a pallet.
- » ALL CYLINDERS MUST BE DEPRESSURIZED PRIOR TO SHIPMENT. Cylinders that do not have the friable disk or knockout valve punctured will not be accepted.
- » Stretch wrap the pallet
- » ONLY standard (#40) cylinders of CAV-GRIP III, CAV-GRIP PVC, and Flexible FAST Dual Tank or small (#20) cylinders of CAV-PRIME will be accepted at the disposal facility.
- » Shipments must contain at least the required minimum quantity or a \$100 fee will be assessed. There is no maximum cap limit for the number of cylinders that can be shipped
- » Call the nearest CleanEarth recycling location and arrange shipping

Clean Earth Locations					
Address	City/State/Zip	Phone Number			
1689 Shar-Cal Road	Calvert City, KY 42029	270-605-2105			
1750 Morgantown Industrial Park	Morgantown, WV 26501	304-292-0659			
402 Webster Chapel Road	Glencoe, AL 35905	800-739-9156			
30677 Huntwood Avenue	Hayward, CA 94544	510-429-1129			
1733 Morgan Road	Modesto, CA 95358	510-429-1129			
4132 Pompano Road	Charlotte, NC 28216	704-395-9559			

» Large (#85) cylinders of CAV-GRIP III should be recycled by following the procedure described on the cylinder sticker.

Non-conforming loads are subject to rejection and surcharge at current disposal rates.