


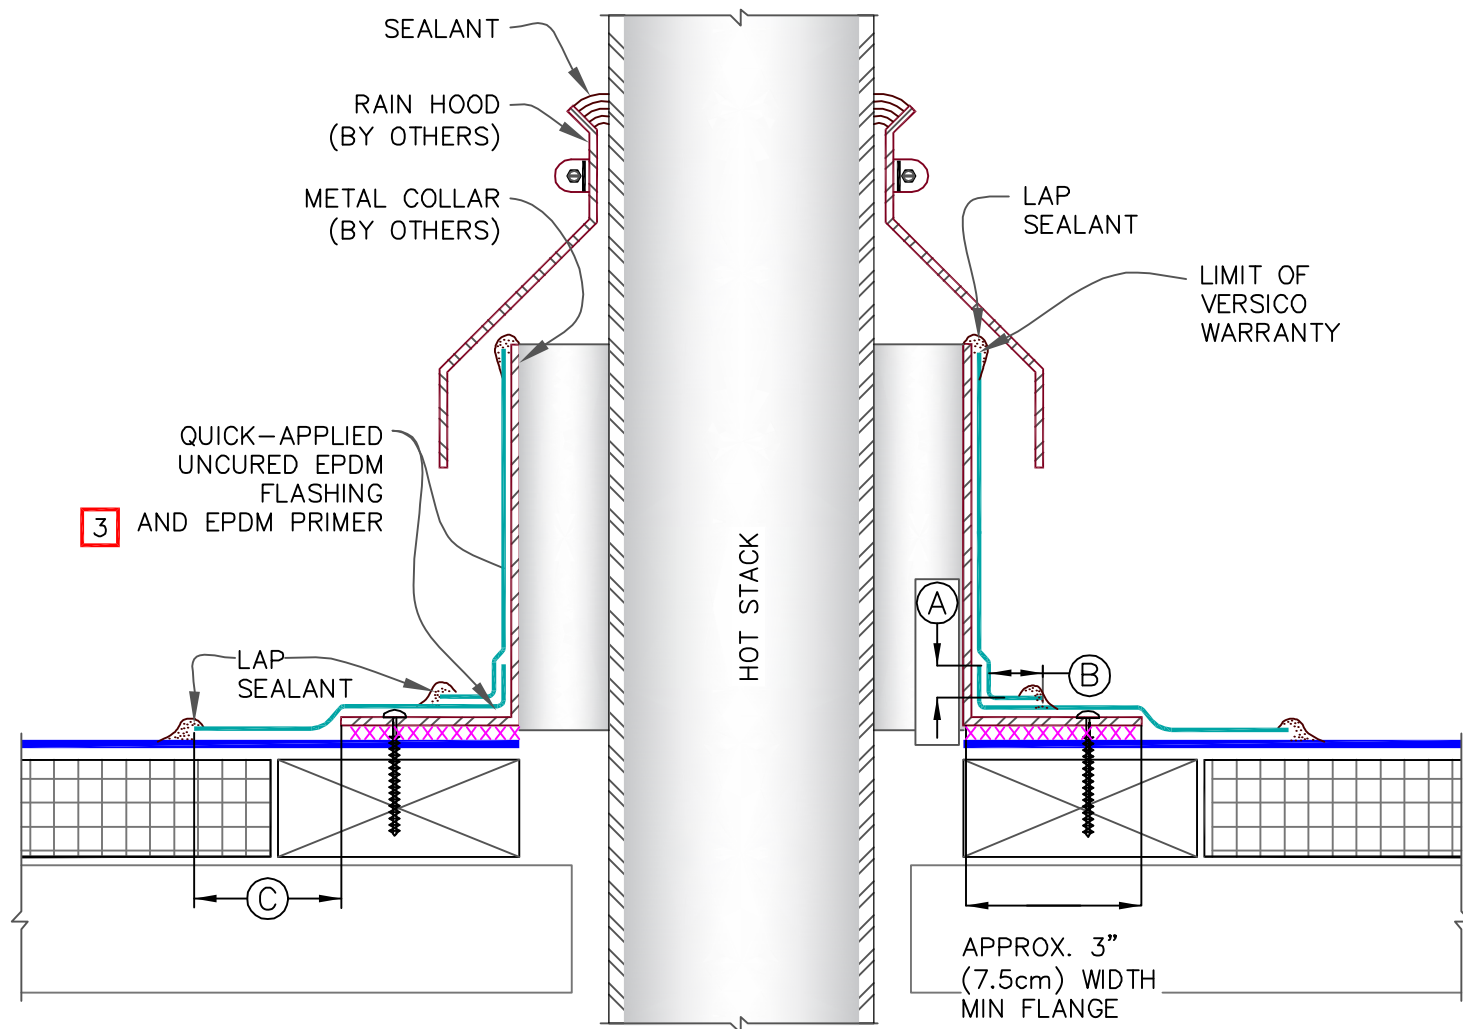

NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING FIELD FABRICATED PIPE SEAL.
2. TEMPERATURE OF METAL COLLAR MUST NOT EXCEED 180°F (82°C).
3. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING QUICK-APPLIED UNCURED FLASHING.

DIMENSIONS		cm	
(A)	1/2"	1.5	MIN.
(B)	1"	2.5	MIN.
(C)	3"	7.5	MIN.

MAXIMUM WARRANTY: 25 YEARS



FIELD FABRICATED HOT STACK

- EPDM MEMBRANE
- APPROVED SUBSTRATE
- 0 → SEE NOTE(S)

VersiGard COMMON DETAILS (EPDM)

VGC-8.4