


SURFACING (STONE BALLAST OR PAVERS ARE SUBJECT TO DESIGNER'S APPROVAL

SURE-SEAL BALLAST RETAINING BAR FASTENED 6" (15cm) O.C.

CARLISLE HEX-HEAD FASTENERS MAXIMUM 8" (20cm) O.C.

DIMENSION VARIES

CARLISLE ROOF GARDEN EDGE PER RG U-1.1A, RG U-1.1B & SPECS.

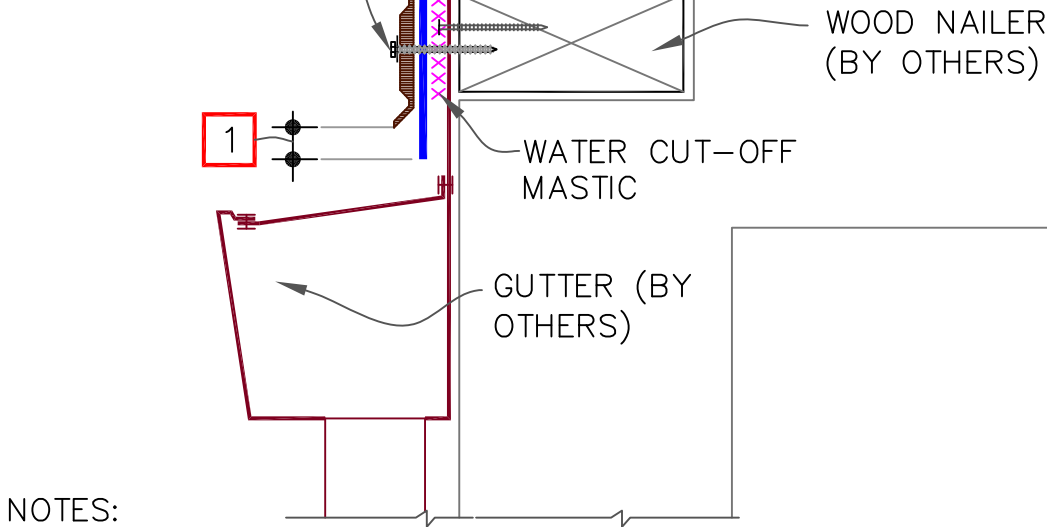

NOTES:

1. MEMBRANE SHEET TO EXTEND 1/2" (1.5cm) MINIMUM BELOW THE METAL TERMINATION BAR.
2. COMPLY WITH ANSI/SPRI RP-14 WIND DESIGN STANDARD FOR VEGETATIVE ROOFING SYSTEMS, WWW.GREENROOFS.ORG, OR REFER TO CARLISLE ROOF GARDEN SPECIFICATIONS FOR RECOMMENDATIONS.
3. BALLAST RETAINING BAR MUST PROVIDE CONSTANT COMPRESSION ON WATER CUT-OFF MASTIC.
4. BALLAST RETAINING BAR MUST EXTEND ABOVE GRAVEL SURFACE SUFFICIENTLY TO RETAIN GRAVEL AND PREVENT GRAVEL MIGRATION.
5. SLOTS IN BALLAST RETAINING BAR MUST BE FLUSH OR BELOW MEMBRANE LEVEL

- CARLISLE GROWTH MEDIA - MiraDRAIN G4 DRAINAGE COMPOSITE - ROOT BARRIER (40-MIL NON-REINFORCED POLYPROPYLENE) 300HV PROTECTION FABRIC - ROOF MEMBRANE - POLYSTYRENE INSULATION - SEE NOTE(S) - IRMA - INSULATED ROOF MEMBRANE ASSEMBLY		SHALLOW GUTTER EDGE - CROSS SECTION 2021 ROOF GARDEN DETAILS DETAIL NO. RG1 1.1A	
--	--	---	--