


# DuraStorm VSH™ Coverboard

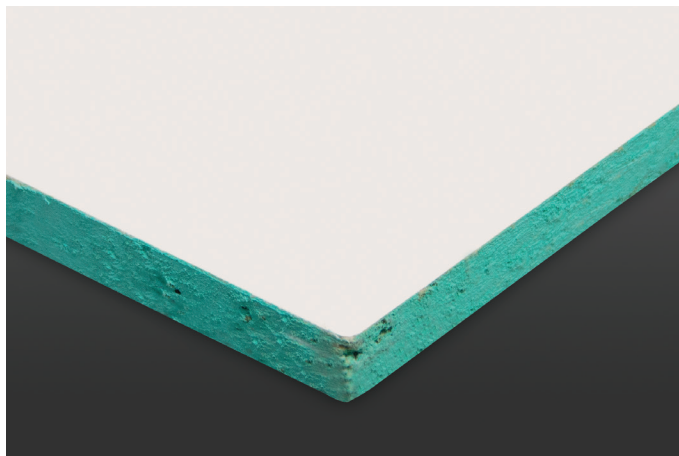

## Overview

DuraStorm VSH is an engineered composite building material made from a proprietary blend of plastic and cellulose fiber sourced from post-industrial and post-consumer waste streams. DuraStorm VSH is a durable, moisture and mold resistant building material. DuraStorm VSH is approved for use in assemblies meeting FM's Very Severe Hail Classification.

## Features and Benefits

- Moisture and Mold Resistance
- FM Very Severe Hail (VSH) approvals
- Ultra-high compressive strength of 3,990psi
- Coated Glass Facer (CGF) on top surface of board
- High impact resilience – won't chip or crack
- Sustainability Champion award available for diversion of post-consumer waste from landfill

## Product Characteristics

- Panel size: 4' x 8' (1,220 mm x 2,440 mm)
- Panel thickness: ½" (13 mm)
- Weight: 64 lbs (29.03 kg)

## Installation

### Mechanically Attached Single-Ply Systems

Each board must be secured to the substrate with approved Versico fasteners and plates. DuraStorm VSH is not compatible with induction-welded systems. Loosely lay the roof board and stagger the joints of the adjacent boards.

**Use carbide teeth saw blades with a minimum of 60 teeth to cut DuraStorm VSH.** Install the roof membrane according to Versico specifications.

### Adhered Single-Ply Systems

DuraStorm VSH may be secured to the roof deck using Flexible DASH™ Adhesive or plates and fasteners. For more specifics about adhesive coverage or fastening patterns, please contact Versico's Design Services department. Loosely lay the roof board and stagger the joints of the adjacent boards.

**Use carbide teeth saw blades with a minimum of 60 teeth to cut DuraStorm VSH.** Install the membrane according to Versico specifications.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

## Precautions

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof covering material. Versico will not be responsible for specific building and roof design, deficiencies in construction or workmanship, dangerous conditions on the jobsite, or improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice.

## Typical Properties and Characteristics

Property	Value
Thickness, Nominal	½" (13 mm)
Pieces Per Unit (4' x 8')	30
Weight, Nominal, LBS/SF	2.0
Compressive Strength, Nominal PSI	3,990 PSI
Flute Spanability	5"
Permeance – ASTM E96 (perm)	< 1
Mold Resistance – ASTM D3273	10
Toxicity (VOCs)	Zero VOCs
Water Absorption, % max, ASTM C473	3.9
Surface water absorption, grams, ASTM C473	2.8

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

## LEED® Information

Post-consumer Recycled Content	100%
Manufacturing Location	Des Moines, IA



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • [www.versico.com](http://www.versico.com)