


# Extruded Fascia Cleat (Cleat Only)

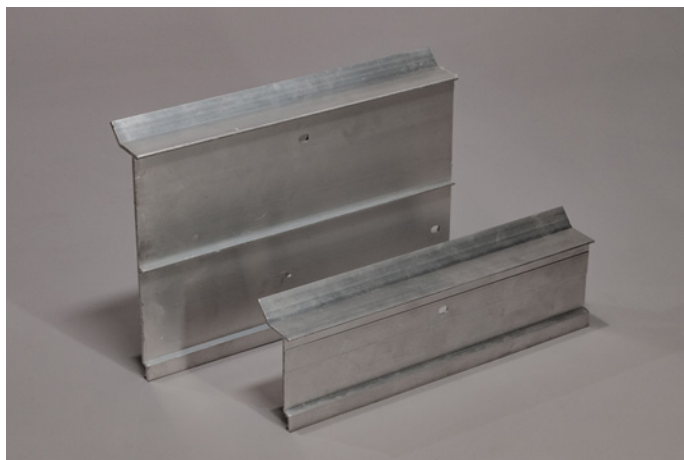

## Overview

Versico's Extruded Fascia is a continuous, .080" extruded aluminum cleat that is available in 12' lengths. This product features pre-punched holes for fasteners spaced 12" on center, and may be used with shop-fabricated edge metal when Versico metal flat sheets are used to fabricate the cover.


## Features and Benefits

- Pre-punched holes allow for quick installation and excellent pull-off resistance
- Made from strong, .080" -thick extruded aluminum
- Available in six standard sizes to fit most roof edge details

## Installation

Apply Water Cut-Off Mastic to the portion of the cleat that will sit on the horizontal surface of the roof. Place the face of the cleat squarely on the edge of the roof membrane over the wood nailing plate. Press securely into position and screw through the pre-punched face holes with #10-13x1" stainless steel panhead screws. For miter application, miter cut into corner as required to maintain a continuous cleat line. Then, fasten at a minimum 6" in each direction from the corner (or closer at special conditions). Butt cleat ends and apply sealant over butted cleat ends. For complete installation instructions, refer to Versico specifications and details or visit [www.versico.com](http://www.versico.com).

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

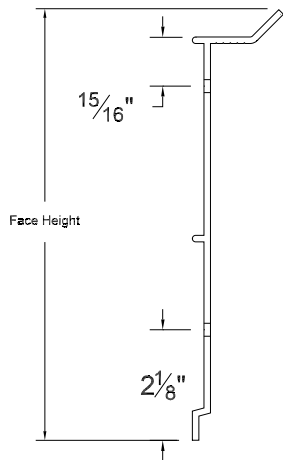

## Typical Properties and Characteristics

Cleat Model	Face Height	# of Nailers Covered
EC4	4"	1
EC5.5	5.5"	2
EC7	7"	3
EC8.5	8.5"	4
EC10	10"	5
EC11.5	11.5"	6

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • [www.versico.com](http://www.versico.com)