



- 1. REFER TO TABLES ON SHEETS
 ATTACHMENT 1-2 FOR
 DETAILED INSPECTION,
 CLEANING AND PRIMING FOR
 DIFFERENT MATERIALS WITHIN
 THE FLASHING AREAS.
 - IF FLUTES ARE
 PERPENDICULAR DRILL A 3/8"
 (1cm) WEEP HOLE IN THE
 BOTTOM FLUTES OF THE
 STEEL DECK ALONG THE TIE
 IN.
 - 3. <u>DETAIL NOT FOR USE ON</u>
 <u>WARRANTY PROJECTS</u>
 <u>EXCEEDING 20-YEARS.</u>
 <u>UNLESS OTHERWISE SPECIFIED.</u>



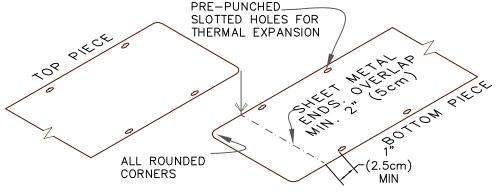

TIE-IN: EPDM MEMBRANE INTO EXISTING ACCEPTABLE ROOF WITH METAL DECK



LIQUID FLASHING