



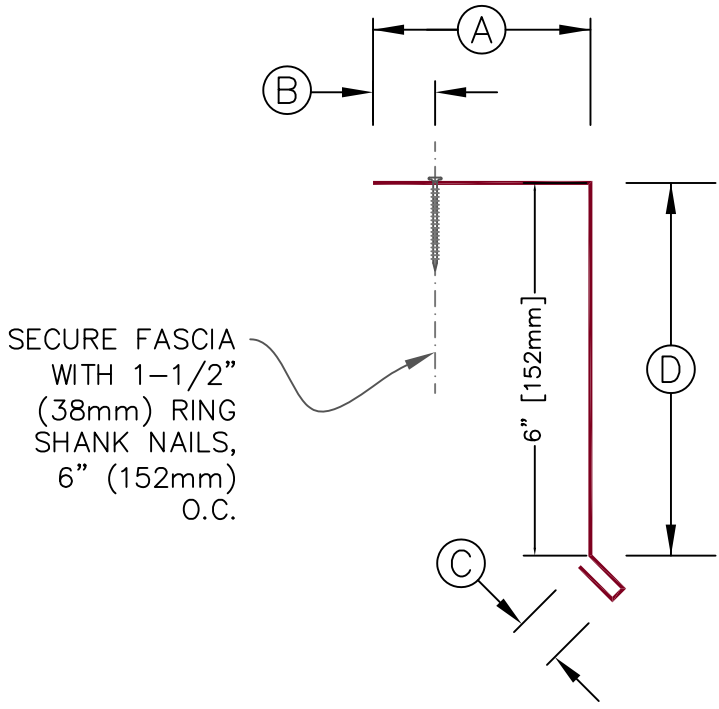

| DIMENSIONS |          | mm         |
|------------|----------|------------|
| (A)        | 3-1/2"   | 28         |
| (B)        | 1"       | 25         |
| (C)        | 3/4      | 19         |
| (D)        | 4" OR 6" | 102 OR 152 |

NOTE:  
ALL 1-1/2" (38mm) RING SHANK NAILS MUST HAVE 1" (25mm) MINIMUM EMBEDMENT INTO WOOD

**(A) ES-1 COMPLIANT FASCIA PROFILE**  
24 GAUGE (0.59 mm) THICK - 10' (3048mm) LENGTH

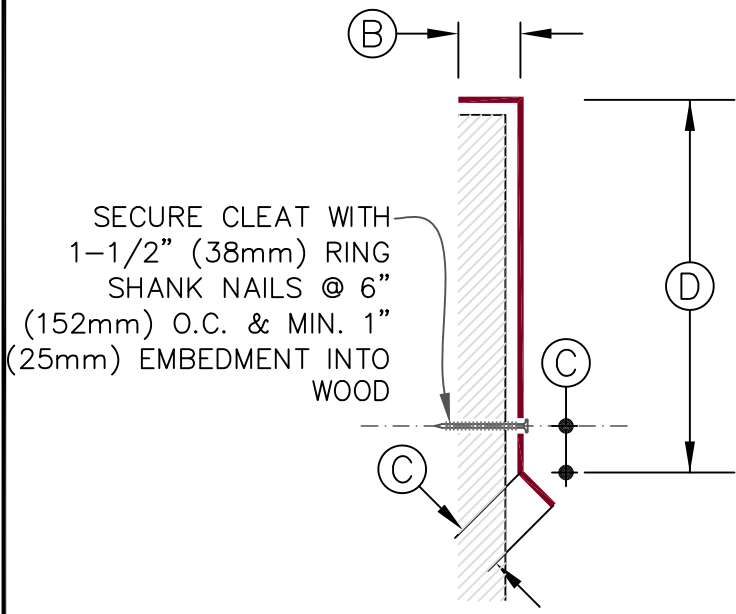

**(B) GALVANIZED METAL CLEAT**  
22 GAUGE (0.75 mm) THICK

| TABLE 1: (TEST DATA) |           |                          |
|----------------------|-----------|--------------------------|
| ES-1                 | COMPLIANT |                          |
| RE-1                 | 424       | PSF (POUNDS/SQUARE FOOT) |
|                      | 62.62     | (kilogram/sq.meter)      |
|                      | 614       | pascals (Pa)             |
| RE-2                 | 435       | PSF (POUNDS/SQUARE FOOT) |
|                      | 64.24     | (kilogram/sq.meter)      |
|                      | 629.95    | pascals (Pa)             |



ANSI / SPRI ES-1 COMPLIANT FASCIA - SHOP FABRICATED

HIGH DENSITY RECOVER BOARD  
 IN-FILL INSULATION  
 SEE NOTE(S)

METAL RETROFIT  
MR | Z1.2