



1 2

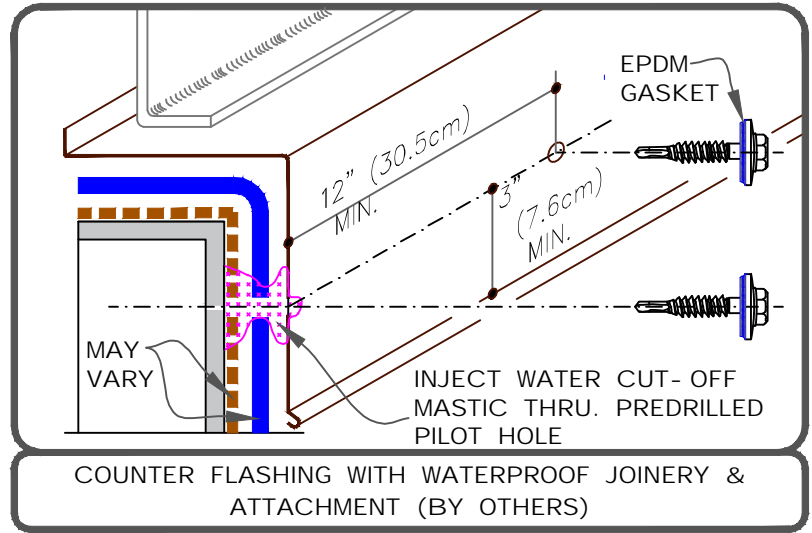

PVC ONLY (NOT KEE HP)
IN LIEU OF BONDING ADHESIVE, THE CURB FLASHING MAY BE INSTALLED IN CAV GRIP PVC.

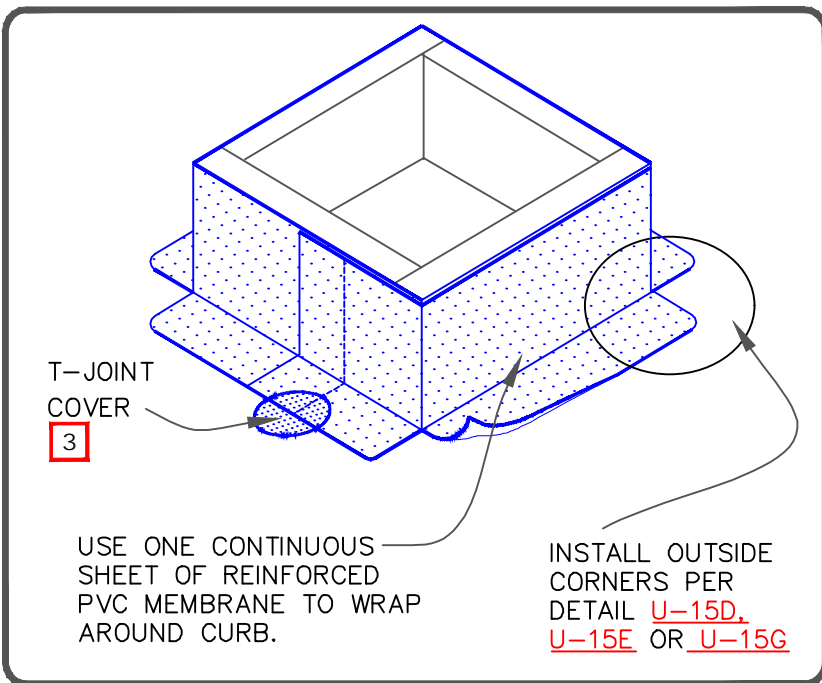

NOTES:

1. REFER TO CARLISLE SPECIFICATIONS FOR ACCEPTABLE CARLISLE FASTENERS AND PLATES.
2. MECHANICAL SECUREMENT MAY BE INSTALLED INTO THE VERTICAL SUBSTRATE.
3. WHEN USING 80 MIL (2.03mm) THICK CURB FLASHING, THE INTERSECTIONS BETWEEN SPLICES MUST OVERLAP WITH A PVC "T- JOINT" COVER.

	CURB FLASHING WITH PVC MEMBRANE MAXIMUM WARRANTY: 30 YEARS		DETAIL NO. U- 5A
		U (Universal Detail)	