



1 2

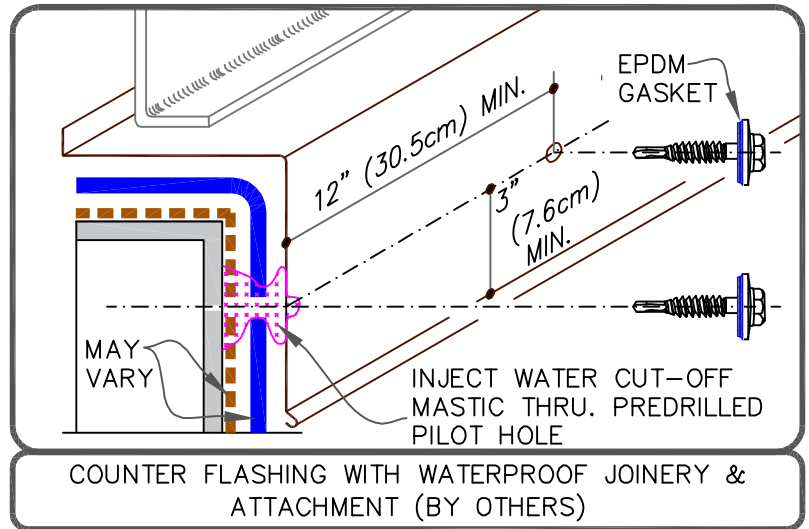

PVC ONLY (NOT KEE HP)  
IN LIEU OF BONDING  
ADHESIVE, THE CURB  
FLASHING MAY BE  
INSTALLED IN CAV GRIP PVC.

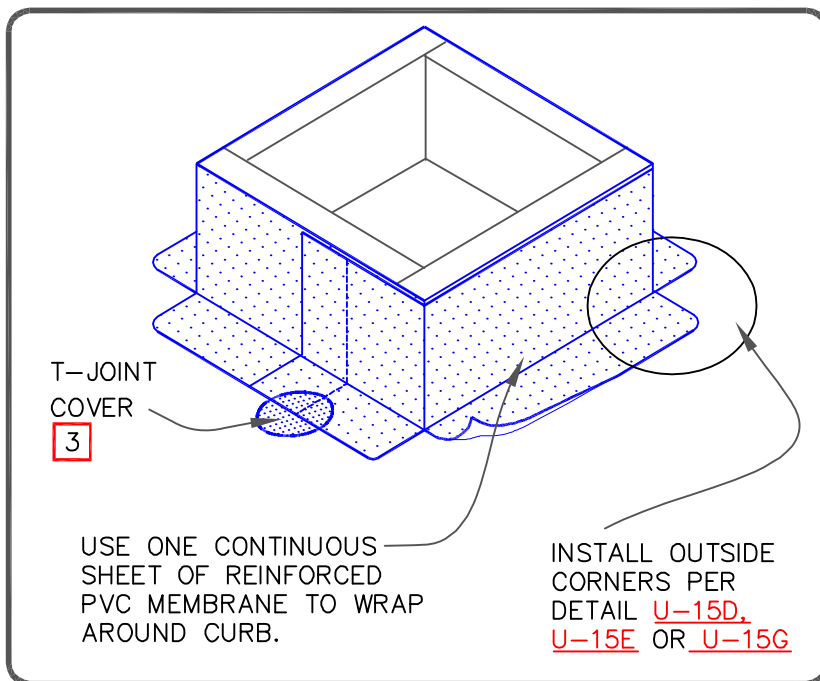

## NOTES:

1. REFER TO CARLISLE SPECIFICATIONS FOR ACCEPTABLE CARLISLE FASTENERS AND PLATES.
2. MECHANICAL SECUREMENT MAY BE INSTALLED INTO THE VERTICAL SUBSTRATE.
3. WHEN USING 80 MIL (2.03mm) THICK CURB FLASHING, THE INTERSECTIONS BETWEEN SPLICES MUST OVERLAP WITH A PVC "T-JOINT" COVER.



CURB FLASHING WITH PVC MEMBRANE

MAXIMUM WARRANTY: 30 YEARS



DETAIL NO.

U-5A

U (Universal Detail)