


SECUREDGE XL GUTTER

BOX

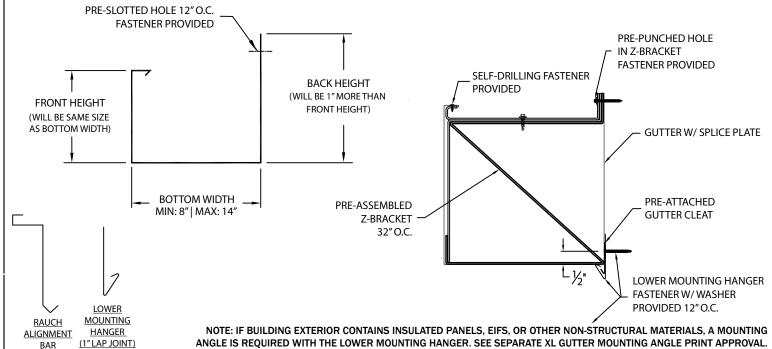

ANGLE IS REQUIRED WITH THE LOWER MOUNTING HANGER. SEE SEPARATE XL GUTTER MOUNTING ANGLE PRINT APPROVAL.

DIMENSIONS SELECT SIZE FRONT HEIGHT **BOTTOM WIDTH BACK HEIGHT** 8" 9" 9" 10" 10" 10" 11" 11" 11" 12" 12" 12" 13" 13" 13" 14" 14" 14" 15"

MATERIAL Color: _____ 22 Ga. Galv. Steel Finish: .050" Aluminum Substrate: .063" Aluminum Wood If substrate is not given, wood fasteners Masonry will be provided. Metal

QUANTITIES Lineal Feet (12'-0"Lengths)	Accessory Type*:	Quicklock (Def ault)	Welded (Surcharge)
Outside Miter (90°)	Expansior	n Joints (Style 1)	
Inside Miter (90°)	Expansior	n Joints (Style 2)	
Right Endcaps			
Left Endcaps			

*NOTES

- Not available in 24 ga. galv. steel or .040" aluminum
- Splice plates and pop rivets provided
- Gutter cannot be cantilevered
- Maximum downspout dimension not to exceed bottom width minus 9/16"
- Pre-attached gutter cleat and lower mounting hanger are made out of the same material as the gutter
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050 aluminum.
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/GT-1 test pressures up to 266 psf (Horizontal), 291 psf (Vertical), 175 plf (Downward)

APPROVALS*



ANSI/SPRI/GT-1

Test Pressures listed in notes

D	D	\cap		\boldsymbol{C}	ГІ	N	IF(\cap
~	К	J.	J	·		ı٧	16-7	┙

Project Name:
Architect:
Roofing Contractor:
Project Type:

	By selecting this box you have verified and
- 1	
	confirmed that dimensions, sizes, and quantities
	are correct, All

products will be installed in strict accordance with printed instructions.

Date: _

Customer Service 800-558-2162 (Metal-Era)

SHT#	of
DATE: _	06/23/25

MLM DRN BY:

MM CKD BY:

DWG #: 15012-43851

REV: