



USE APPROPRIATE U-9 DETAIL TERMINATION FOR WARRANTY DURATION (ABOVE ANTICIPATED WATER LEVEL OR SLUSH LINE)

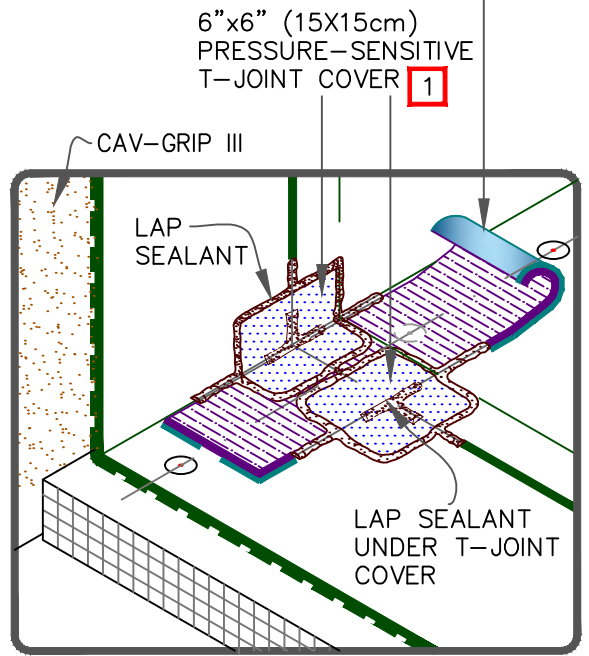


NOTES:

1. T-JOINTS CAN BE ELIMINATED WHEN PRESSURE-SENSITIVE OVERLAYMENT STRIP IS USED.
2. FASTENERS AND PLATES REQUIRED AT 6" (7.5cm) O.C. FOR WARRANTY WIND SPEEDS EXCEEDING 90 MPH.

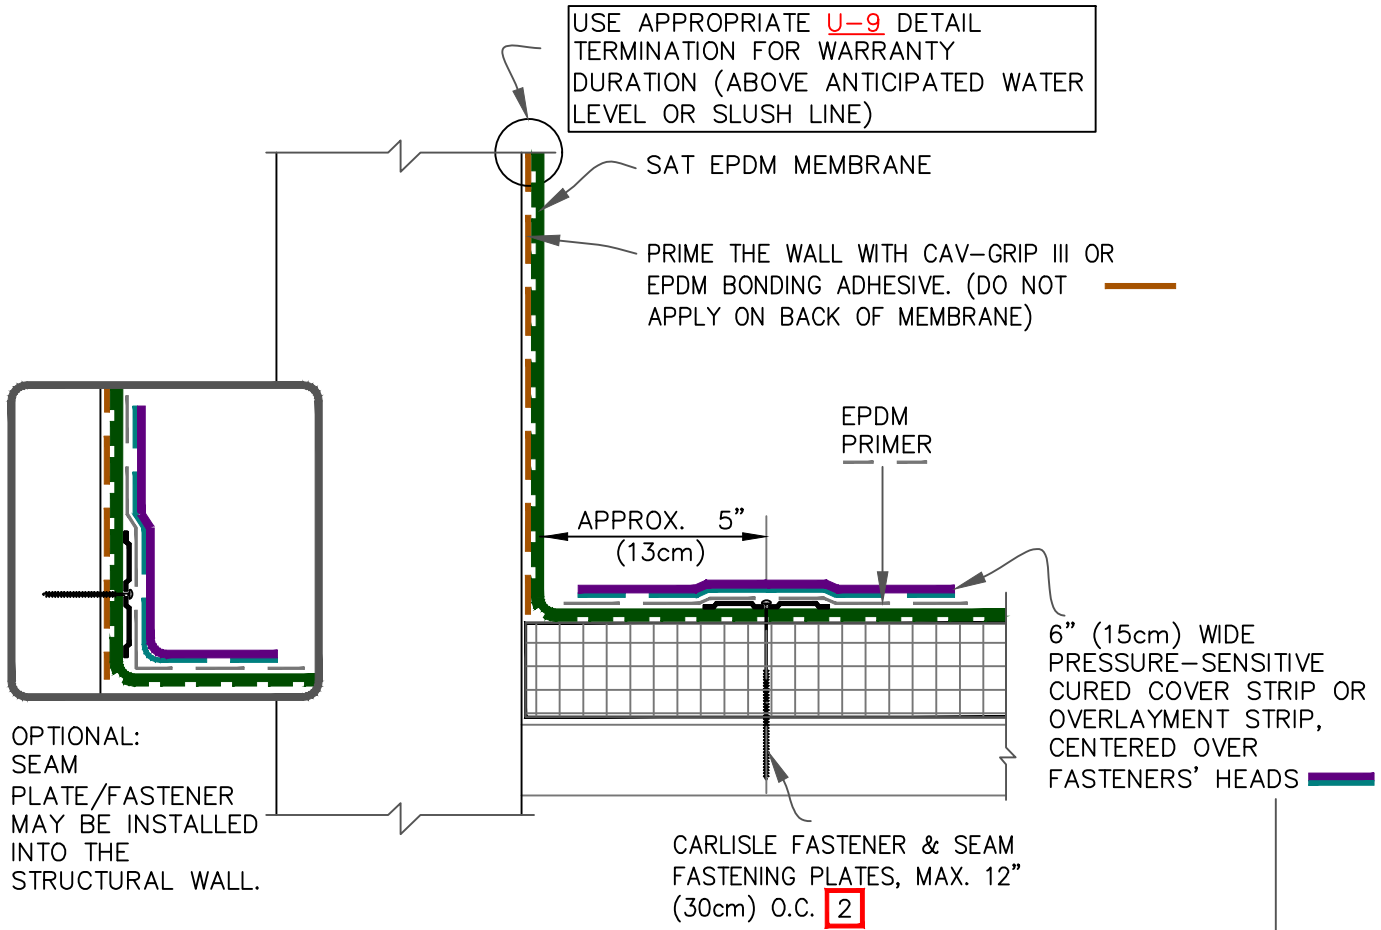

PARAPET/CURB WITH CONTINUOUS MEMBRANE - COVER STRIP  
 MAXIMUM WARRANTY: 20 YEARS



DETAIL NO.  
 U-12F  
 SELF ADHERING TECHNOLOGY