


VersiWeld® TPO Rib Profile

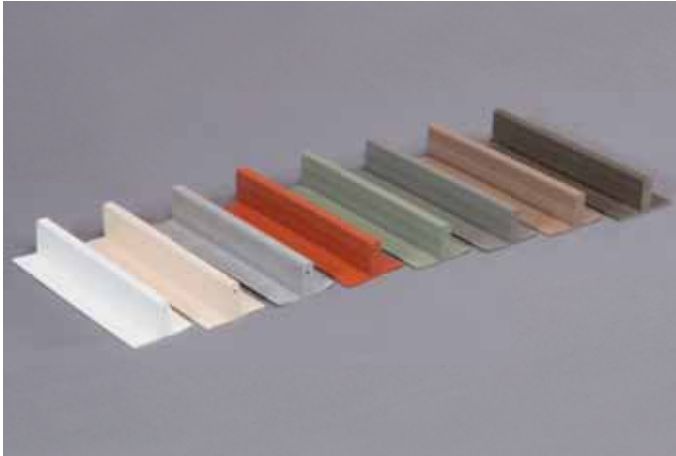

Overview

Obtain the look of standing seam metal roofing with the performance of a TPO single-ply membrane with the Versico VersiWeld TPO Rib Profile. This profile is extruded from the same weather-resistant TPO compound as the membrane. The VersiWeld TPO Rib Profile is secured to the TPO roofing membrane to simulate a standing seam metal roofing system. The physical dimensional stability of the profile is enhanced with fiberglass and the rectangular profile provides exceptional shadow lines for aesthetic appeal. Available in White, Gray, Tan, Terra Cotta, Patina Green, Slate Gray, Rock Brown & Medium Bronze.

The VersiWeld TPO Rib Profile measures 1 ¼" tall and 1 ¾" wide, including the welding flanges, while the vertical profile is a substantial ⅜" thick. The profile has an ⅛" alignment hole as well as an ⅛" fiberglass reinforcing cord. The VersiWeld TPO Rib Profile is available in 10' lengths packaged 20 per carton. Twenty-five (25) connecting pins are also included in the carton.

Features and Benefits

- Same weatherability as membrane
- Improves aesthetics of sloped roofs
- Lower cost than conventional metal roofing
- Flexible heat-weldable flange allows easy welding of the profile to the roofing membrane
- Fiberglass reinforcement adds dimensional stability
- Creative installations allow for building design features
- Proper installation does not affect watertight integrity of membrane
- Non-penetrating application

Installation

The VersiWeld TPO Rib Profile is designed for use with VersiFleece® TPO adhered roofing systems, but may also be used with adhered VersiWeld TPO systems. Ensure that all welding surfaces are clean and dry.

Method 1 – Using a standard autowelder and hand welding

Method 2 – Using the Hapco, Inc. Standing Seam Profile Wheel Kit Part Number 107081C2



Hapco, Inc.
390 Portage Boulevard
Kent, OH 44240
(800) 345-9353
www.hapcoinc.com

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

VersiWeld TPO Rib Profile

Precautions

- Use proper stacking procedures for cartons to ensure sufficient stability.
- Exercise caution when walking on wet membrane.
- Sunglasses that filter out ultraviolet light are strongly recommended as the membrane's white surface is highly reflective to sunlight. White surfaces reflect heat and light. Roofing technicians should dress appropriately and wear sunscreen to protect skin from the sun.
- White surfaces reflect heat and may become slippery due to frost and ice accumulation.
- Care must be exercised when working close to a roof edge when the surrounding area is snow covered.
- VersiFleece TPO membrane exposed to the weather must be prepared with Versico TPO Membrane Cleaner prior to hot-air welding.

Typical Properties and Characteristics

Length (inches)	120 ± 1/8
Wt/Ln Ft (lb)	0.30
Wt/Piece (lb)	3.0
Height (inches)	1.25
Width (inches)	1.75
Pieces/carton	20
Connecting pins/carton	25
Color	White, Gray, Tan, Terra Cotta, Patina Green, Slate Gray, Rock Brown, Medium Bronze

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

LEED® Information

Pre-consumer Recycled Content	10%
Post-consumer Recycled Content	0%
Manufacturing Location	Mount Airy, NC
Solar Reflectance Index	N/A



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com