


12" 24" 12"

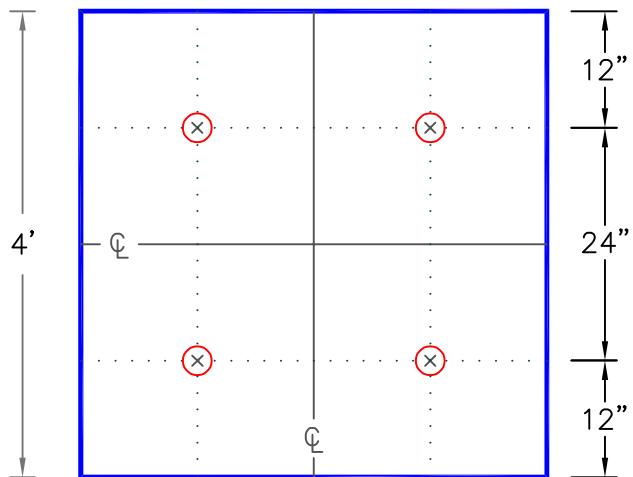

NOTES:

1. THIS DETAIL APPLIES TO MIN. 2" (51mm) THICK (SINGLE OR TOP LAYER) CARLISLE POLYISOCYANURATE INSULATION WHEN FASTENED INTO 22-GAUGE (0.8mm) STEEL, STRUCTURAL CONCRETE, MINIMUM 15/32" (12mm) PLYWOOD OR 1-1/2" (40mm) THICK WOOD PLANK ROOF DECKS.
2. WHEN ENHANCED INSULATION FASTENING IS REQUIRED AS PRESCRIBED IN FACTORY MUTUAL LOSS PREVENTION DATA SHEET 1-29, ANSI/SPRI WD-1 OR MIAMI-DADE COUNTY, REFER TO [CARLISLE'S DESIGN REFERENCE DR-05-18](#).
3. FOR CRITERIA ON INSULATION FASTENERS AND PLATES, REFER TO CARLISLE SPECIFICATIONS.
4. IF A WIND SPEED WARRANTY GREATER THAN 55 MILES PER HOUR (25 METERS PER SECOND) OR A WARRANTY TERM GREATER THAN 20-YEARS IS SPECIFIED OR FOR SYSTEMS OVER 50'(15METERS), ADDITIONAL FASTENING MAY BE REQUIRED, REFER TO CARLISLE SPECIFICATIONS.
5. DETAIL NOT FOR USE OVER ORIENTED STRAND BOARD, GYPSUM, CEMENTITIOUS WOOD FIBER (TECTUM), LIGHTWEIGHT INSULATING CONCRETE OR STEEL ROOF DECK THINNER THAN 22-GAUGE (0.8mm), [REFER TO DETAIL A-27A](#) FOR ACCEPTABLE FASTENING.

FEET TO CENTIMETERS

4'	8'
120	250

inch	INCHES TO CENTIMETERS																			
	1/8"	1/4"	15/32"	1/2"	5/8"	3/4"	1"	1.5"	2"	2.5"	3"	4"	6"	8"	9"	11"	12"	18"	24"	36"
cm	0.5	1	1.2	1.5	1.6	2	2.5	4	5	6.5	7.5	10	15	20	23	28	30	46	61	91



FASTENER & PLATE



CENTER LINE

GUIDE LINE

MINIMUM 2" THICK CARLISLE
HP-H / INSULBASE / SECURSHIELD
POLYISOCYANURATE INSULATION

For additional information, refer to Specifications



DETAIL NO.

A-27B

ADHERED SYSTEM