

## What is a RapidLock System?


Carlisle SynTec Systems' revolutionary RapidLock (RL<sup>™</sup>) Roofing System utilizes Velcro<sup>®</sup> Brand Securable Solutions to provide an adhesive-less roof that matches the performance of fully adhered assemblies. RapidLock's easy installation provides a consistent application that eliminates the variability associated with adhesive cure times.

RapidLock systems have been time-tested against severe natural disasters, providing building owners with security by protecting their assets. RapidLock's exceptional performance makes it ideal for both re-roofing and new construction applications.

# WHAT ARE THE RAPIDLOCK SYSTEM'S COMPONENTS?

The RapidLock system is comprised of specialty FleeceBACK<sup>®</sup> membrane and InsulBase<sup>®</sup> RL or SecurShield<sup>®</sup> RL Polyiso Insulation. The membrane acts as the hook while the polyiso insulation acts as the loop.




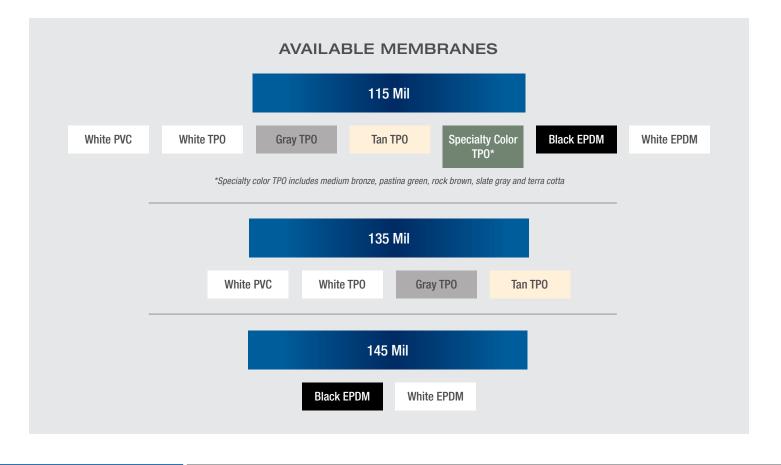



#### AVAILABLE INSULATION

- » SecurShield® HD
- » InsulBase® 2", 2.6"
- » SecurShield 2", 2.6"
- » SecurShield HD Composite 2", 2.5", 3", 3.5", 4"

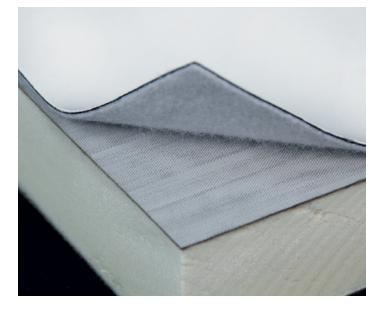

#### WHY CHOOSE A RAPIDLOCK SYSTEM?



No application temperature restrictions, great for installation any time of year



VOC- and odor-free, will not disrupt occupied buildings



Labor saving adhesive-less membrane attachment system



Integrated with an adhered slip sheet for ease of installation

Excellent resistance to hail and punctures



FM 1-90 approval rating

Up to 30-year, 120-mph peak gust wind speed warranty available

### WARRANTY OFFERING

FleeceBACK Rapidlock Warranty Options			
Warranty Coverage	FleeceBACK RL EPDM	FleeceBACK RL TPO	FleeceBACK RL PVC
Hail	Up to 3"	Up to 3"	Up to 3"
Puncture	Up to 32 hours	Up to 32 hours	Up to 32 hours
Max Wind Speed	Up to 120 mph	Up to 120 mph	Up to 120 mph
Max Warranty Term	Up to 30-years	Up to 30-years	Up to 30-years

Warranty coverage is determined by system design. Reference the warranty tables in the FleeceBACK RapidLock Roofing System Specification Attachment IV for a complete list of Warranted Systems and Design Criteria.

800-479-6832 | P.O. Box 7000 | Carlisle, PA 17013 | Fax: 717-245-7053 | www.carlislesyntec.com