
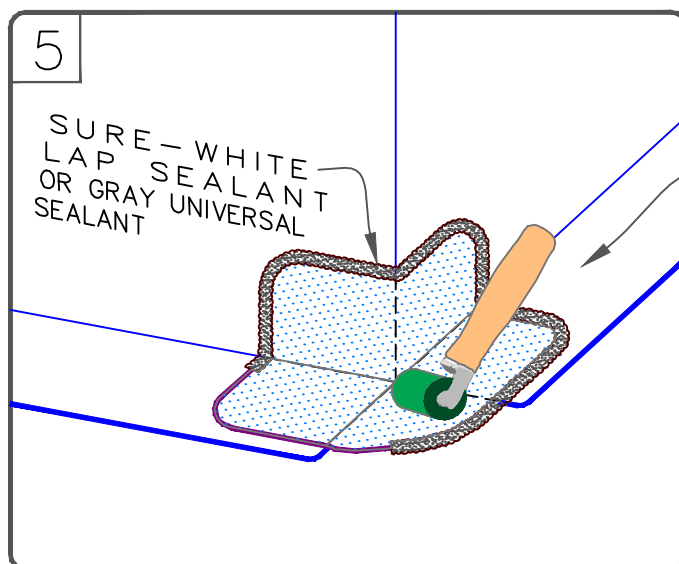
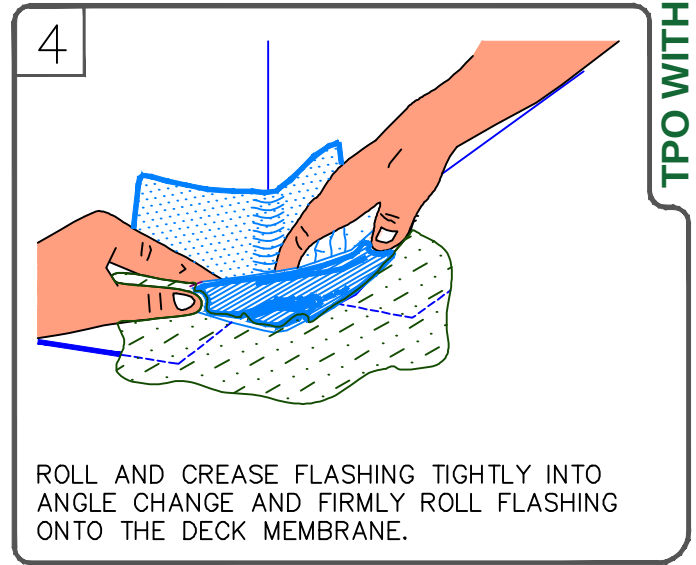
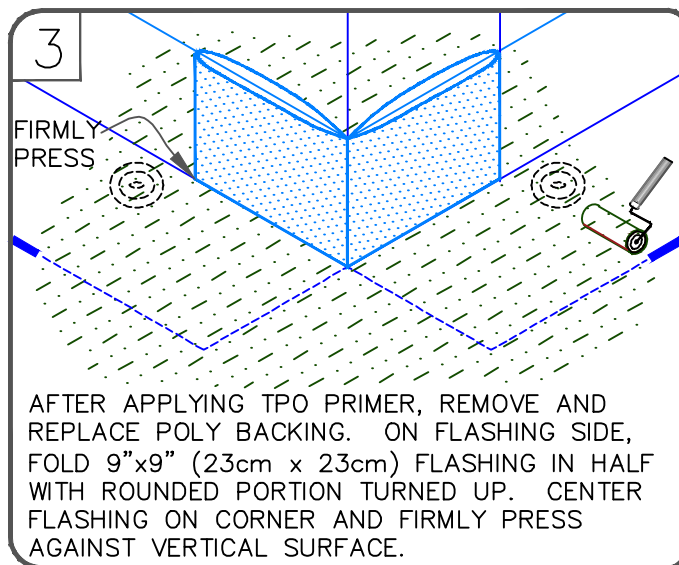
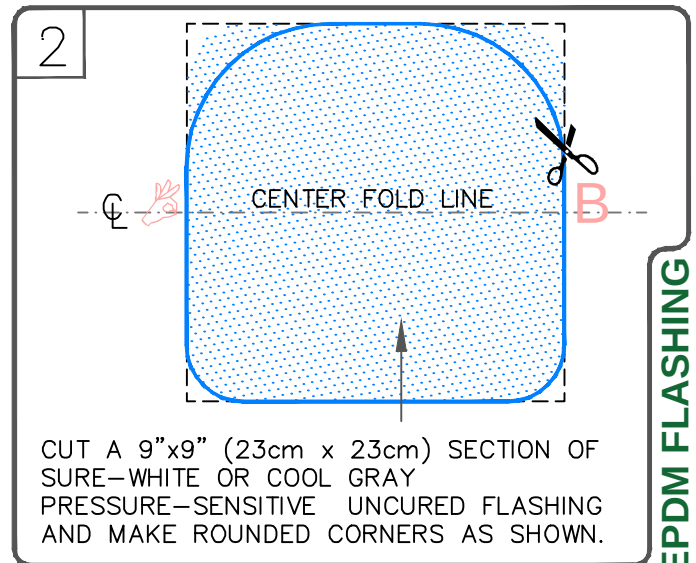


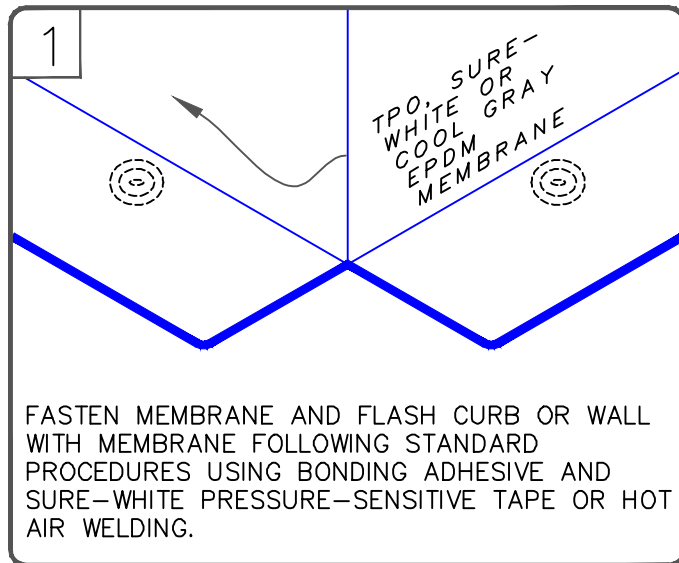

AFTER ADHERING, ROLL WITH A TWO INCH WIDE ROLLER. PAY PARTICULAR ATTENTION TO THE STEP OFFS AND ANGLE CHANGES.

IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PRESSURE-SENSITIVE UNCURED FLASHING.

WARRANTY REQUIREMENTS

DETAIL NOT FOR USE ON 25-30 YEAR WARRANTY ROOFS.

CARLISLE
SYNTEC SYSTEMS

OUTSIDE CORNER WITH EPDM PRESSURE-SENSITIVE ELASTOFORM FLASHING (OPTION 2)

MAXIMUM WARRANTY: 20 YEARS

TPO

DETAIL NO.

U-15GT

U (Universal Detail)