




Mechanically Attached Systems

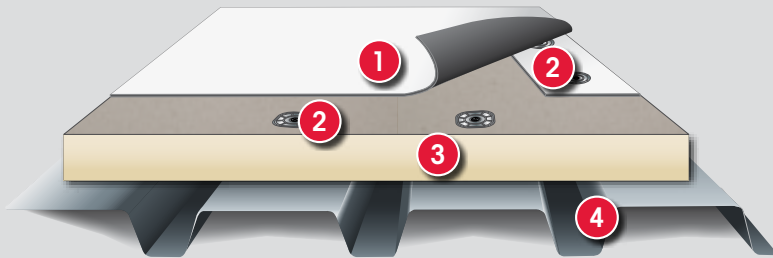

Typical Applications

- 1 VersiWeld® TPO Membrane
- 2 Versico fasteners and plates
- 3 Versico Approved insulation
- 4 Approved roof deck

VersiWeld 25- and 30-year Total System Warranties*

1. **Membrane** (fastened at 12" on center with maximum 10'-wide field sheets)¹:
80-mil VersiWeld TPO
80-mil VersiWeld HS
2. **Membrane Fasteners**:
CD-10 Fasteners (concrete)
Purlin Fasteners (metal retrofit only)
HPV-XL Fasteners (steel/wood)
MP 14-10 Fasteners (concrete)
HPVX Fasteners (steel/wood)
3. **Membrane Seam Plates**:
HPVX Plates
HPV-XL Plates (HPV-XL fasteners only)
RhinoBond®/isoweld®
4. **Versico Insulation Fasteners** (with insulation plates):
HPV Fasteners (steel/wood)
Insultite Fasteners (steel/wood)
ASAP Fasteners (steel/wood)
HPVX Fasteners (steel/wood)
CD-10 Fasteners (concrete)
MP 14-10 Fasteners (concrete)
5. **Cover Board** (optional):
SecurShield™ HD
SecurShield HD Plus
DensDeck®
SECUROCK®
Recovery Board (with acceptable insulation)
6. **Versico Approved Insulation**:
VersiCore MP-H® Polyisocyanurate (25psi)
SecurShield Polyisocyanurate (25psi)
Insulfoam EPS (minimum 1.25 lb. density)
Insulfoam HD Composite
Insulfoam SP
XPS
7. **Vapor Barrier** (optional):
VapAir Seal™ 725TR
VapAir Seal MD
Polyethylene (by others)
Other
8. **Thermal Barrier** (optional, not for use directly over concrete decks):
DensDeck/DensDeck Prime
SECUROCK Gypsum Fiber
Other
9. **Deck**:
22-gauge or heavier steel
Structural concrete
Wood plank
¾" plywood
10. **Metal Edging**:
Shop-fabricated metal
Versico VersiTrim™
Metal by others
11. **Applicable Details**:
TPMA-2.0A, TPMA-2.1, TPMA-2.2, TPMA-22.0, TPC-1.2, TPC-1.3, TPC-1.4, TPC-1.5, TPC-1.6, TPC-2.0, TPC-3.1, TPC-3.2, TPC-5.1, TPC-5.2, TPC-5.4, TPC-6.1, TPC-6.2, TPC-6.3, TPC-6.4, TPC-8.1, TPC-8.3, TPC-8.4, TPC-8.5, TPC-8.6, TPC-9.1, TPC-9.2, TPC-9.5, TPC-9.6, TPC-12.1, TPC-12.1A, TPC-12.3, TPC-13.3, TPC-13.5, TPC-13.6, TPC-15.1, TPC-15.3, TPC-15.4, TPC-15.6, TPC-15.7, TPC-16.1, TPC-16.2, TPC-18.1, TPC-18.3, TPC-20.1, TPC-20.2, TPC-24.0
12. **Construction Type**:
New Construction
Complete Tear-off
13. **Slope**:
18" per foot maximum.

Notes:
 1. Over gypsum or cementitious wood fiber decks, maximum 9" on center fastener spacing is required for 10' sheets.
 2. Refer to Versico's specifications and details for required perimeter enhancements. For buildings 61'-100' tall, enhance membrane fastening to 6" on center.
 *Buildings up to 100' tall with 55-mph wind speed coverage. Projects requiring warranty wind speeds greater than 55-mph should be reviewed by a Versico representative. All products must be supplied by Versico to be included in the warranty coverage. All roof systems can only be accepted upon inspection by a Versico Field Service Representative. Versico reserves the right to change or enhance any of the above components due to specific or unique project conditions. The intent of this document is to verify the proposed roof assembly meets the requested warranty. Versico is not responsible for local and state building code requirements, and any discrepancy should be clarified by the design professional of record. Refer to Versico's most currently published specifications and details for additional information.

Insulation Fastening Rates 25- and 30-year Warranty

Insulation (top layer)	4' x 8' board
1.5" to 4.0" VersiCore MP-H Polyisocyanurate insulation or acceptable cover board	6

¹Recover projects require 8 fasteners and insulation plates per 4' x 8' board.

NOTE: Add an extra perimeter sheet for 25/30-year warranty; no 12-foot wide field sheets are to be used.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com

©2019 Versico. 12.10.19

VersiWeld, VersiTrim, VersiCore MP-H, and the Versico logo are trademarks of Versico. SecurShield and VapAir Seal are trademarks of Carlisle Construction Materials, LLC. R-Tech is a trademark of Insulfoam. GypTec is a trademark of OMG, Inc. DensDeck is a registered trademark of Georgia-Pacific Gypsum LLC. SECUROCK is a trademark of USG Corporation or its subsidiaries or affiliates. RhinoBond is a registered trademark of OMG, Inc. and is patent protected. isoweld is a trademark of SFS Intec.