


# Sure-Seal® EPDM

## Fully Adhered Roofing Systems

## Warranty Submittal Sheet

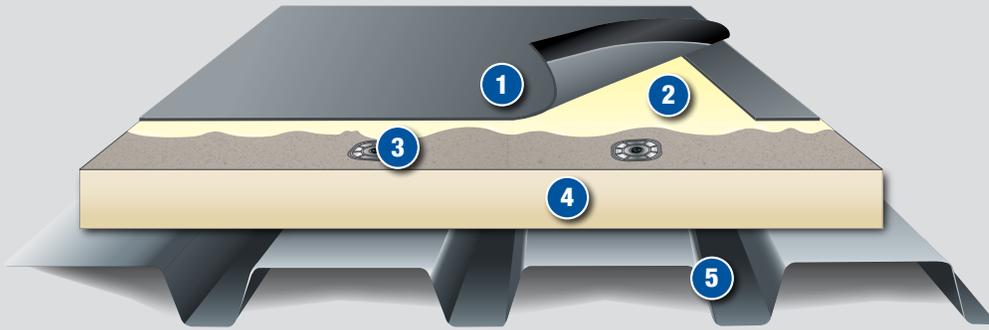

### Typical Applications

- 1 Sure-Seal EPDM Membrane with Factory-Applied Tape
- 2 Carlisle Bonding Adhesive
- 3 Carlisle Fasteners and Plates
- 4 Carlisle Approved Insulation
- 5 Approved Roof Deck

### Sure-Seal, Sure-White®, and Sure-Tough™ 25 and 30-year Total System Warranties\*

1. **Membrane:**
  - 60-mil Sure-Seal EPDM (25-year max.)
  - 60-mil Sure-Seal Cool Gray EPDM (25-year max.)
  - 90-mil Sure-Seal EPDM
  - 75-mil Sure-Tough™ EPDM
  - 60-mil Sure-White® EPDM (25-year max.)
  - 90-mil Sure-White EPDM
2. **Membrane Bonding Adhesive:**
  - 90-8-30A
  - EPDM x-23 Low-VOC
  - Low-VOC 1168
  - CAV-GRIP™ III
3. **Carlisle Insulation Fasteners and Insulation Plates or Adhesive:**
  - Flexible FAST™ Adhesive
  - HP (steel/wood)
  - InsulFast™ (steel/wood)
  - ASAP (steel/wood)
  - CD-10 (concrete)
  - HP-X™ (steel/wood)
  - HD 14-10 (concrete)
4. **Cover Board (optional):**
  - SecurShield® HD Eco
  - SecurShield HD Composite
  - StormBase
  - DensDeck StormX Prime
  - SECUROCK UltraLight Coated Glass Mat
  - DEXcell® FA
  - DEXcell FA VSH
  - DEXcell Cement Roof Board
  - SecurShield HD
  - SecurShield HD Plus
  - SECUROCK® Gypsum-Fiber
5. **Carlisle Approved Insulation:**
  - DensDeck® Prime
  - HP Recovery Board
  - EcoStorm VSH™
  - InsulBase® Polyiso (25-psi)
  - InsulBase Eco
  - InsulBase NH
  - SecurShield Polyiso (25-psi)
  - SecurShield Eco
  - SecurShield NH
  - Insulfoam EPS (cover board required)
  - Insulfoam EPS Composite
  - XPS (cover board required)
  - OPTIM-R® (SecurShield HD coverboard required)
  - ChannelDry® EPS (SecurShield insulation required)
6. **Vapor Barrier (optional):**
  - VapAir Seal™ 725TR (direct to concrete, wood, gypsum, or thermal barrier)
  - VapAir Seal MD (direct to metal deck only, fastening of above insulation board required)
  - SureMB 90/120TG Base (direct to concrete or thermal barrier only)
  - SureMB 90 Base Ply (see Carlisle Specs and Details)
  - Polyethylene (by others, fastening of above insulation board required)
  - G2 Base Sheet
  - Vented Base Sheet
7. **Thermal Barrier (optional, not for use directly over concrete decks):**
  - DensDeck Prime
  - DensDeck StormX Prime
8. **Deck:**
  - DEXcell FA
  - DEXcell FA VSH
  - SECUROCK UltraLight Coated Glass-Mat
  - SECUROCK Gypsum-Fiber
  - 22-gauge steel or heavier
  - Structural concrete
  - Wood plank
  - Minimum ½" plywood
  - Gypsum (Adhesive attachment only)
  - Cementitious wood fiber (Adhesive attachment only)
  - Approved lightweight insulating concrete (Adhesive attachment only)
9. **Metal Edging:**
  - Shop-fabricated metal
  - Carlisle SecurEdge™
  - Metal by others
10. **Applicable Details:**
  - U-1A.1, U-1B.1, U-1C, U-1D.1, U-1F, U-2A.1, U-2B.1, U-2C, U-3A, B, C, U-5A, B, C, D, U-6A, B, C, D, E, U-8A, U-8A.1, U-8B.1, U-8C.1, U-8D.1, U-9A, B, E, F, G, U-12A, B, U-13A, B, C, D, E, F, G, U-15A, B, C, U-15D.1, U-15G.1, U-16A.1, U-16B.1, U-16C.1, U-18A, U-20A, B, U-22, U-24, U-30
11. **Construction Type:**
  - New construction
  - Complete tear-off
12. **Slope:**
  - Positive slope required.

\*Buildings up to 100' tall with 55-mph wind speed coverage. Projects requiring warranty wind speeds greater than 55 mph should be reviewed by a Carlisle representative. All products must be supplied by Carlisle to be included in the warranty coverage. All roof systems can only be accepted upon inspection by a Carlisle SynTec Field Service Representative. Carlisle reserves the right to change or enhance any of the above components due to specific or unique project conditions. The intent of this document is to verify the proposed roof assembly meets the requested warranty. Carlisle is not responsible for local and state building code requirements, and any discrepancy should be clarified by the design professional of record. Refer to Carlisle's most currently published specifications and details for additional information.

# Sure-Seal® EPDM

## Fully Adhered Roofing Systems

### Insulation Fastening Rates Up to 25 and 30-year Warranties

Top layer of insulation / coverboard	4' x 8' board <sup>2</sup>	Bead adhesive spacing for 4' x 4' boards <sup>1,4</sup>	
		Field	Perimeter
Minimum 1.5"-thick Carlisle InsulBase Polyiso (25-psi), SecurShield Polyiso (25-psi), or SecurShield HD Composite Polyiso Insulation	16	6" o.c.	6" o.c.
Minimum 2.0"-thick Carlisle InsulBase Polyiso (25-psi), SecurShield Polyiso (25-psi), or SecurShield HD Composite Polyiso Insulation	16	6" o.c.	6" o.c.
½"-thick SecurShield HD Plus <sup>3</sup> or EcoStorm VSH	16	6" o.c.	6" o.c.
Minimum ¼"-thick DensDeck Prime, DEXcell Glass Mat, DEXcell FA, or SECUROCK Gypsum-Fiber Roof Board <sup>3</sup>	16	6" o.c.	6" o.c.
½"-thick SecurShield HD or HP Recovery Board <sup>3</sup>	16	6" o.c.	6" o.c.
1 ½" StormBase <sup>®</sup>	17	6" o.c.	6" o.c.
OPTIM-R	N/A	6" o.c.	6" o.c.
ChannelDry	16	N/A	N/A

<sup>1</sup> For structural concrete decks, bead spacing can be 12" on center in the field and 6" on center in the perimeters.

<sup>2</sup> For buildings 51-100' tall, enhance a minimum 12'-wide perimeter with 50% more insulation fasteners and plates.

<sup>3</sup> Cover boards must be installed over a minimum 1"-thick Carlisle approved insulation on Steel Decks

<sup>4</sup> Cementitious Wood Fiber & Gypsum - Full Spray (FS)