



NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING QUICK-APPLIED UNCURED EPDM FLASHING.
2. TEMPERATURE OF PIPE MUST NOT EXCEED 180°F (82°C).
3. HPX FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED OVER STEEL DECKS.
4. FOR STRUCTURAL STEEL TUBING GREATER THAN 12" ACROSS USE [VGC-5](#) DETAILS.

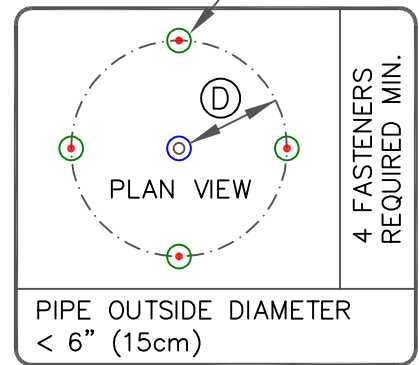




DIMENSIONS		cm	
(A)	1/2"	1.5	
(B)	3"	7.5	
(C)	1"	2.5	
(D)	6"	15	TO
	12"	30	
(E)	12"	30	MAX.

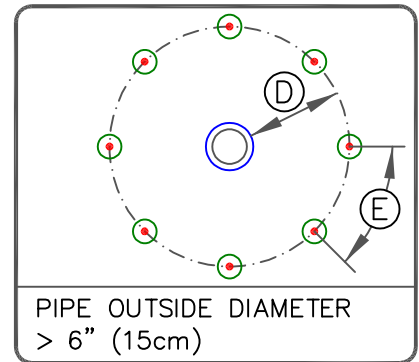

MAXIMUM WARRANTY: 30 YEARS



FIELD FABRICATED PIPE WRAP (25/30 YEAR WARRANTIES)

 REINFORCED EPDM—UNLESS NOTED OTHERWISE
 APPROVED SUBSTRATE
 0 → SEE NOTE(S)

MECHANICALLY ATTACHED EPDM
VGMA-8.2A