
VersiCore® NH Taper Polyiso Insulation

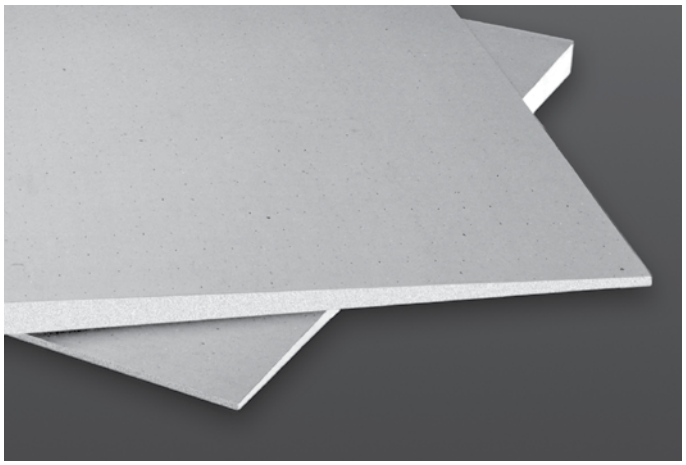


Declare.

NH Polyiso Board Insulation
Versico Roofing Systems

Final Assembly: Montgomery, New York, USA; Puyallup, Washington, USA
Life Expectancy: 60 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Rooftop Recycling Program), Landfill

Ingredients:

MDI (Isocyanate): Diphenylmethane-diisocyanate; **Polyol:** Polyol; **Facer:** Cellulose Pulp, Glass, oxide, chemicals; **Blowing Agent:** Pentane; **Catalyst:** Potassium-2-Ethylhexanoate; **Surfactant:** Propylene glycol

Living Building Challenge Criteria:

I-13 Red List:
■ LBC Red List Free
□ LBC Red List Approved
□ Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: Not Compliant
I-14 Responsible Sourcing: Not Applicable

VSO-0001
EXP. 01 OCT 2026
Original Issue Date: 2017

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

Overview

VersiCore NH Taper Polyiso Insulation is an LBC "Red List Free" rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded on each side to glass-reinforced felt (GRF). VersiCore NH Taper contains zero halogenated flame retardants.

Features and Benefits

- Contains zero halogenated flame retardants
- VersiCore NH Taper Polyiso Insulation provides the highest R-value per inch of commercially available insulation products
- Environmentally friendly construction with 0% ozone-depleting components and CFC free

Panel Characteristics


- 4' x 4' (1220 mm x 1220 mm) and 4' x 8' (1220 mm x 2440 mm) panels in thicknesses of .5" (13 mm) minimum to 4.5" (114 mm) maximum in a single layer
- Available slopes are ⅛" (3 mm), ¼" (6 mm), ⅜" (10 mm) and ½" (13 mm) per foot

Applications


- Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)

Standard Panel Profiles


½" Slope



¼" Slope

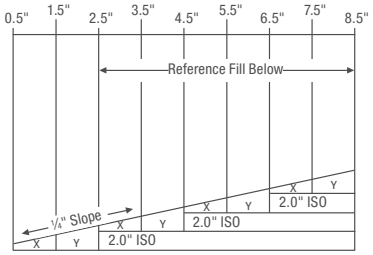


⅛" Slope

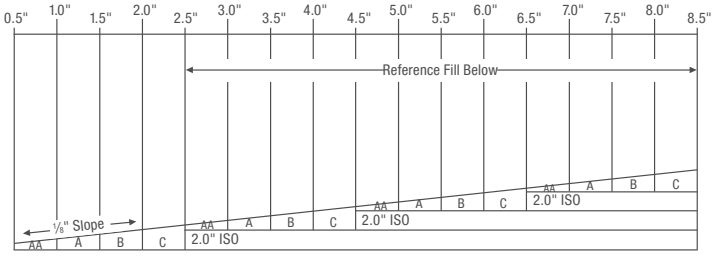

VERSICO
ROOFING SYSTEMS

VersiCore NH Taper Polyiso Insulation

Extended Panel Profiles

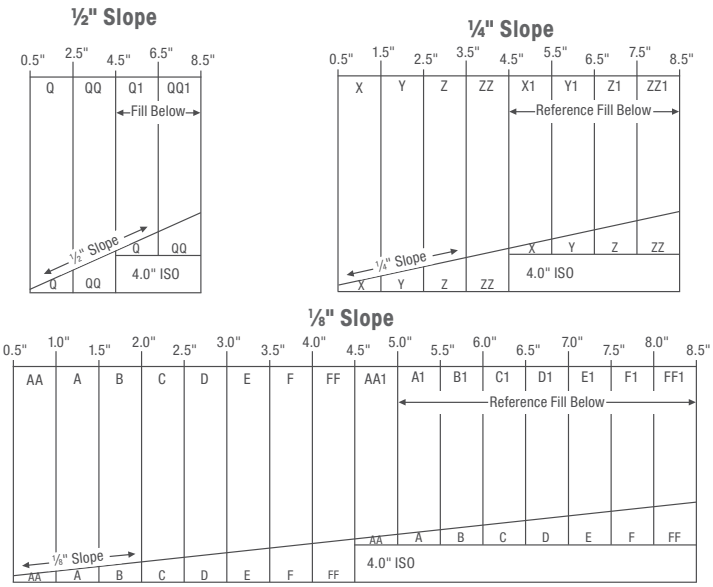

Installation

Ballasted Single-Ply Systems

Each VersiCore NH Taper panel is loosely laid on the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

Mechanically Attached & Adhered Single-Ply Systems

Secure each VersiCore NH Taper panel to the roof deck with Versico's Flexible DASH™ adhesive or the appropriate plate and fastener. Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Codes and Compliances

- ASTM C1289, Type II, Class 1, Grade 2 (20 psi), Grade 3 (25 psi)
- International Building Code (IBC) Section 2603
- UL Standard 790, 263 and 1256: Component of Class A Roof Systems (refer to UL Roof Materials' system directory)
- CAN/ULC S704, Type 2 & 3, Class 2
- Third-party certification with the PIMA Quality Mark for Long-Term Thermal Resistance (LTTR) values
- FM Standards 4450/4470: Class 1 approval for steel roof-deck constructions (refer to FM RoofNav℠)
- Florida Building Code Approval FI#1296
- Miami-Dade County, Florida Noa No: 04-1018.01

Precautions

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof covering material. Protect installed product from excessive foot traffic. Versico will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Versico for more specific details, or refer to PIMA Technical Bulletin No. 109: Storage & Handling Recommendations for Polyiso Roof Insulation.

Typical Properties and Characteristics

Physical Property	Test Method	Value
Compressive Strength	ASTM D1621 ASTM 1289	20 psi* minimum (138 kPa, Grade 2)
Dimensional Stability	ASTM D2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E96 12.10	<1 perm (57.5 ng/(Pa•s•m²))
Water Absorption	ASTM C209	<1% volume
Service Temperature		-100°F to 250°F (-73°C to 122°C)

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

CLASSIFIED C UL US

Foamed plastic as roof deck construction material with resistance to an internal fire exposure only for use in construction no.(s) 120 and 123. See UL Directory of Products Certified for Canada and UL Roofing Materials and Systems Directory. 99DL.

U.S. GREEN BUILDING COUNCIL

PIMA QualityMark℠ The Certified LTTR-value

VERSICO ROOFING SYSTEMS

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com

© 2026 Versico. Printed in U.S.A.
VE-19350 - "VersiCore NH Taper Technical Data Bulletin" - 05.22.26

Versico, VersiCore, DASH, and the Versico logo are trademarks of Versico.