


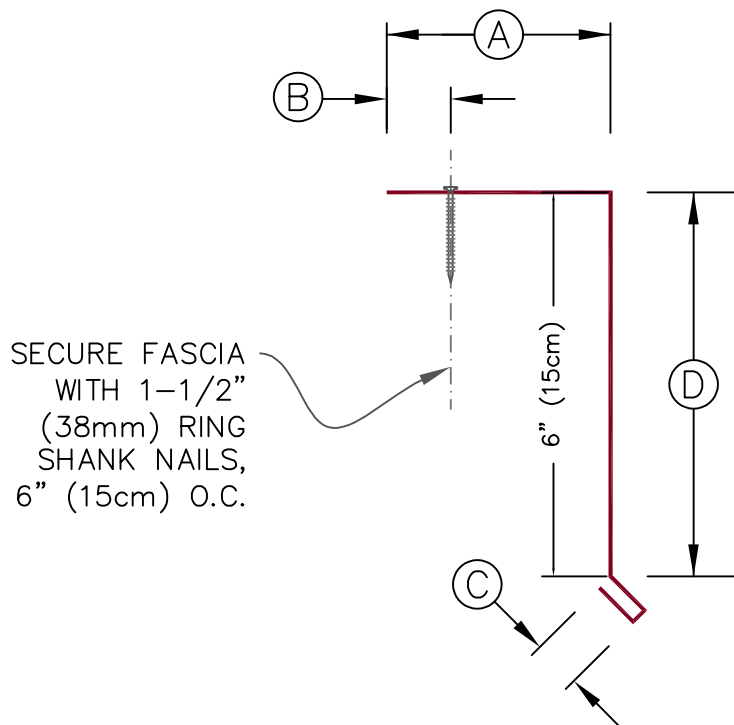

DIMENSIONS		cm
(A)	3-1/2"	3
(B)	1"	2.5
(C)	3/4	2
(D)	4" OR 6"	10 OR 15

NOTE:

ALL 1-1/2" (38mm) RING SHANK NAILS MUST HAVE 1" (2.5cm) MINIMUM EMBEDMENT INTO WOOD

(A) ES-1 COMPLIANT FASCIA PROFILE

24 GAUGE (0.59 mm) THICK – 10' (3m) LENGTH

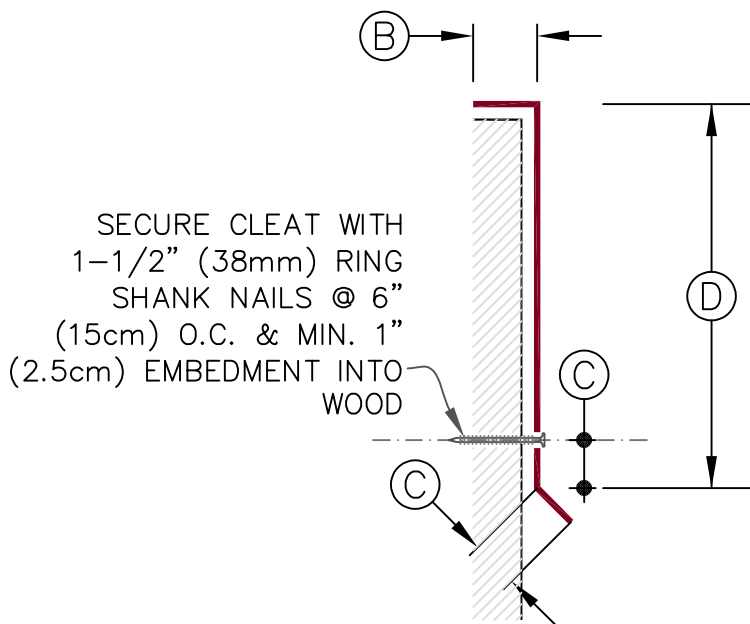



TABLE 1: (TEST DATA)

ES-1	COMPLIANT	
RE-1	424	PSF (POUNDS/SQUARE FOOT)
	62.62	(kilogram/sq.meter)
	614	pascals (Pa)
RE-2	435	PSF (POUNDS/SQUARE FOOT)
	64.24	(kilogram/sq.meter)
	629.95	pascals (Pa)


(B) GALVANIZED METAL CLEAT

22 GAUGE (0.75 mm) THICK

ANSI / SPRI ES-1 COMPLIANT FASCIA – SHOP FABRICATED




• HIGH DENSITY RECOVER BOARD



• ROOF MEMBRANE




• IN-FILL INSULATION



• WOOD NAILER (BY OTHERS)

0

• SEE DRAWING NOTE(S)



SHEET NO.

MRI Z1.2