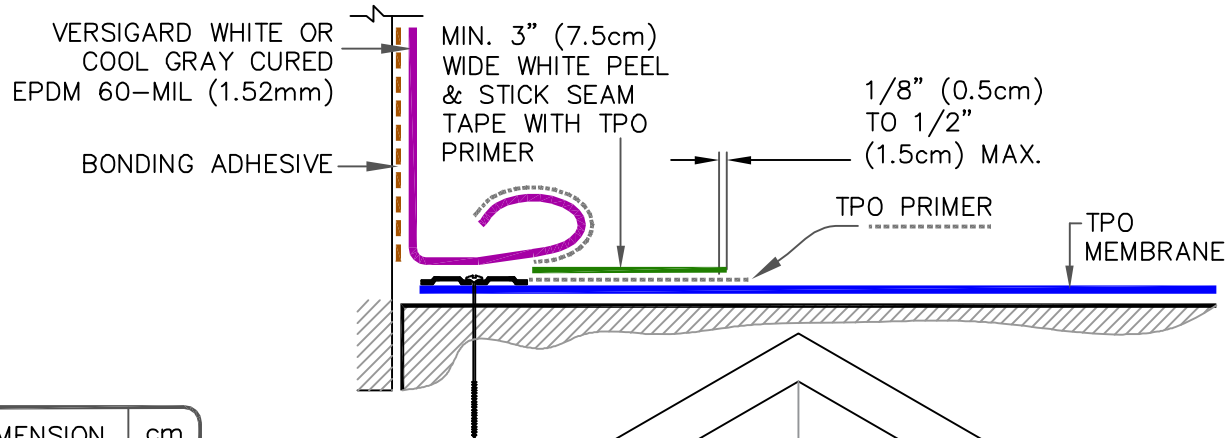


WARRANTY
REQUIREMENTS

20 YEAR WARRANTY


USE MIN 3" (7.5cm) WIDE
PEEL & STICK TAPE ORMIN 3" (7.5cm) WIDE FIELD-APPLIED
VERSIGARD WHITE PEEL & STICK
SEAM TAPE

25 OR 30 YEAR WARRANTY

REFER TO VERSICO TYPICAL TPO DETAIL [TPC-2](#).

DIMENSION	cm
(A) 3"	7.5

TPO WITH EPDM FLASHING

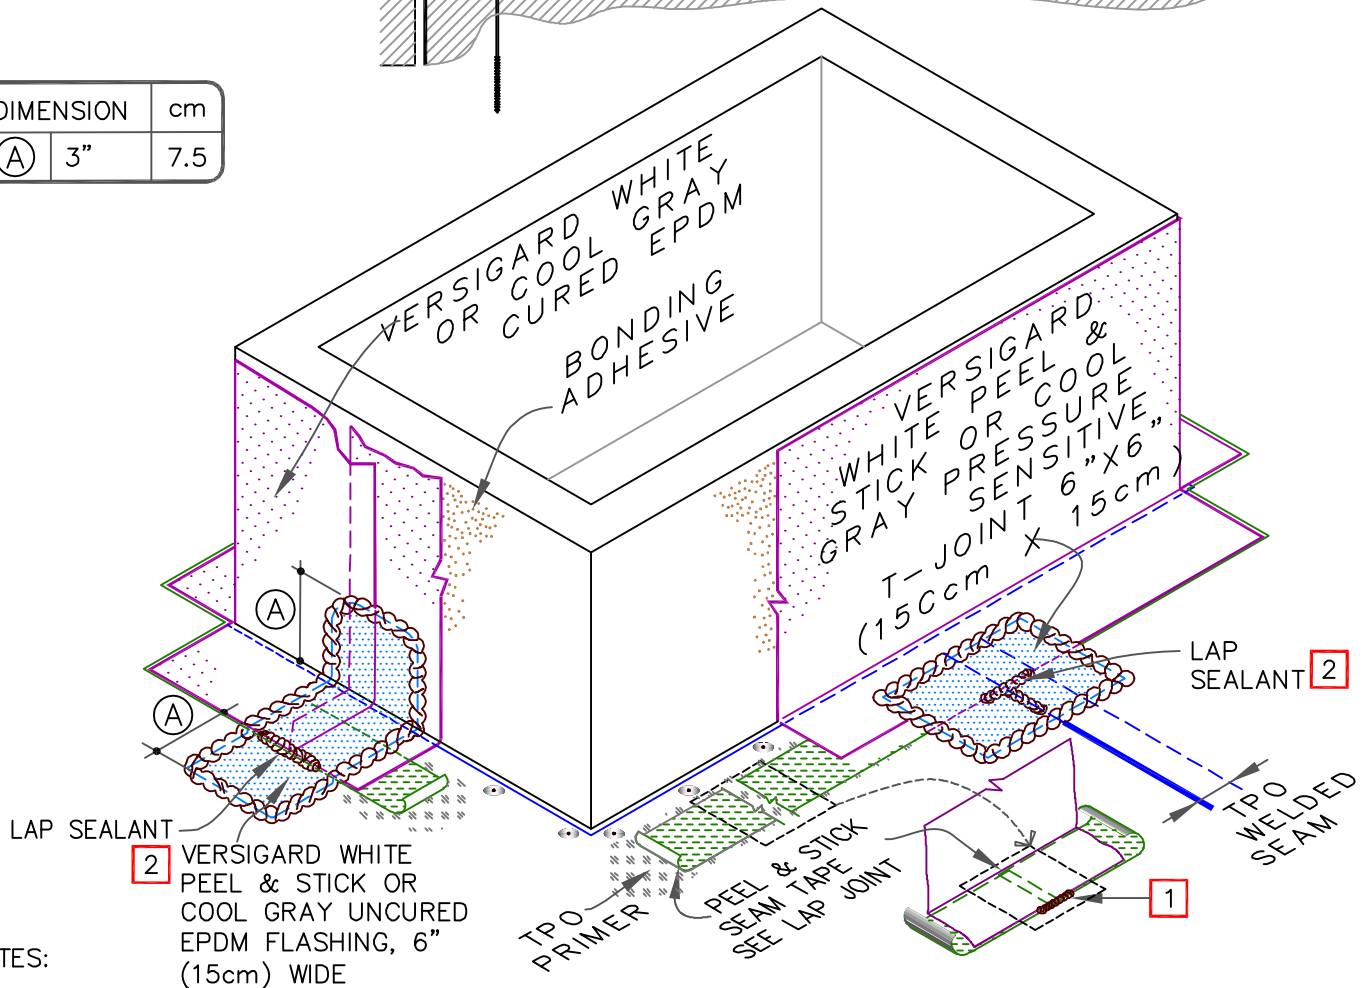

NOTES:

1. FIELD APPLIED VERSIGARD WHITE PEEL & STICK OR COOL GRAY PRESSURE-SENSITIVE SEAM TAPE IS TO BE OVERLAPPED A MINIMUM OF 1" (2.5cm) AT THE ENDS OF EACH CUT PIECE. APPLY LAP SEALANT AT TAPE OVERLAPS 2" (5cm) IN BOTH DIRECTIONS.
2. APPLY VERSICO WHITE LAP SEALANT OR GRAY UNIVERSAL SEALANT ALONG THE LEADING EDGE OF THE MEMBRANE SPLICE UNDER THE T-JOINT COVER, COVERING THE EXPOSED SPLICE TAPE 1/2" (1.5cm) IN ALL DIRECTIONS FROM THE SPLICE INTERSECTION.
3. INSTALL OUTSIDE CORNERS PER DETAIL [VGC-15.7](#) OR [VGC-15.5](#).



CURB/WALL WITH EPDM FLASHING

	TPO MEMBRANE
	APPROVED SUBSTRATE
	SEE NOTE
	PS (PRESSURE SENSITIVE) P&S (PEEL & STICK) QA (QUICK APPLIED)

THERMOPLASTIC
ROOFING SYSTEM

TPC-5.1T