
9A

MECHANICAL TERMINATION WITH COUNTER FLASHING



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)


METAL COUNTER-FLASHING WITH LEAD WEDGES, AS REQUIRED (BY OTHERS).

THREADED FASTENERS OR CARLISLE HP TERM BAR NAIL-IN

CARLISLE TERMINATION BAR

WARRANTY UP TO 30 YEARS SEE INSET

9B MECHANICAL TERMINATION



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)


CARLISLE HP TERM BAR NAIL-IN

CARLISLE TERMINATION BAR

WARRANTY
UP TO 20 YEARS

SEE INSET


INSET A

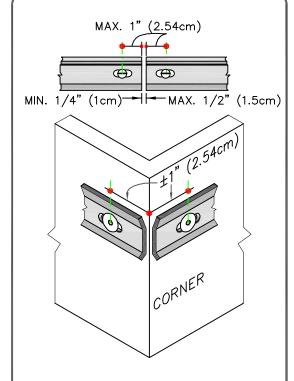

NOTES:

- APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON EXPOSED WOOD.
- 2. DO NOT WRAP TERMINATION BAR AROUND CORNERS.
- DETAIL <u>9D</u> MUST BE USED AT VERTICAL JOINTS IN PANEL WALLS.

9C COUNTER FLASHING TERMINATION



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)

METAL COUNTER-FLASHING WITH LEAD WEDGES, AS REQUIRED (BY OTHERS).

FASTEN MEMBRANE @ 12" (30cm) O.C. MAX. USE GALVANIZED WASHERS, MIN. 1", (2.54cm) DIAMETER

NOTE:

1. WHEN MECHANICAL FASTENERS ARE USED TO PENETRATE THE METAL COUNTER-FLASHING, USE EPDM WASHERS, APPLY WATER CUT-OFF MASTIC UNDER THE COUNTER-FLASHING OR CAULK THE FASTENER HEADS.

WARRANTY
UP TO 10 YEARS

APPLICABLE BONDING ADHESIVE

WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.



MEMBRANE TERMINATIONS
(PAGE 1 OF 3)

WARRANTY AS NOTES FOR EACH DETAIL




U-9

U (Universal Detail)

9D

MECHANICAL TERMINATION AT VERTICAL JOINTS

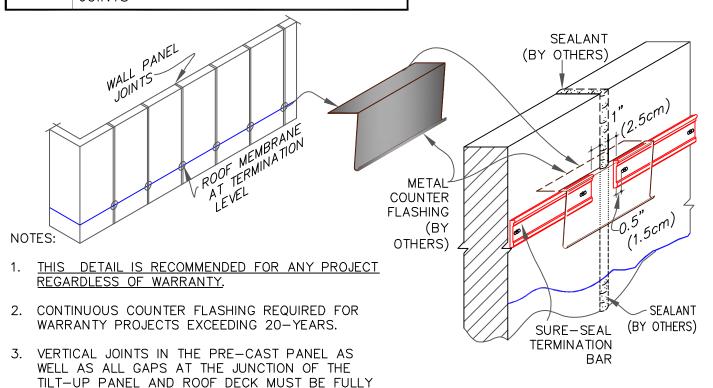


4. APPLY ON HARD SMOOTH SURFACE ONLY.

SEALED TO PREVENT AIR INFILTRATION.

9E SecurEdge & SecurEdge 300 COPINGS

NOTES:

- 1. MEMBRANE MUST BE EXTENDED AT CORNERS TO PROVIDE COMPLETE COVERAGE OF THE TOP WALL SURFACE. REFER TO 3D DETAIL U-9F.
- 2. REFER TO <u>SecurEdge COPING</u>
 <u>INSTALLATION INSTRUCTION</u>
 MANUAL FOR STEP-BY-STEP
 INSTRUCTION PROCEDURES.

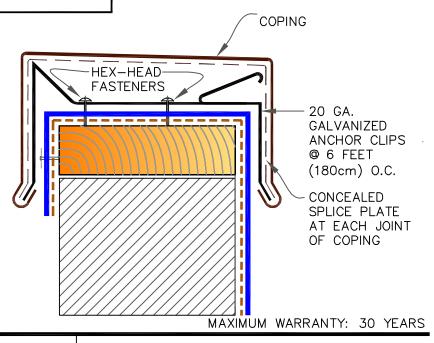

APPLICABLE BONDING ADHESIVE

WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.



MEMBRANE TERMINATIONS
(PAGE 2 OF 3)


WARRANTY AS NOTES FOR EACH DETAIL




DETAIL NO.

9


U (Universal Detail)

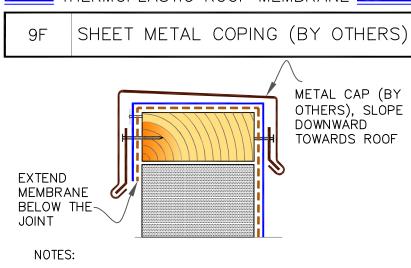



- MEMBRANE MUST BE EXTENDED TO CORNERS TO PROVIDE COMPLETE COVERAGE OF THE TOP WALL SURFACE.
- 2. WARRANTY AS PROVIDED (BY OTHERS).

9G MASONRY COPINGS (BY OTHERS)

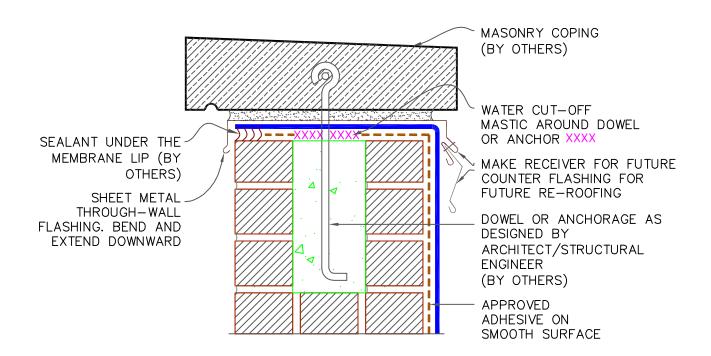

MAXIMUM WARRANTY: 30 YEARS

APPLICABLE BONDING ADHESIVE

WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.



MEMBRANE TERMINATIONS (PAGE 3 OF 3)

MAXIMUM WARRANTY: 30 YEARS



U-9

U (Universal Detail)