




# VERSIGARD QA EPDM

## Quick-Applied Roofing System

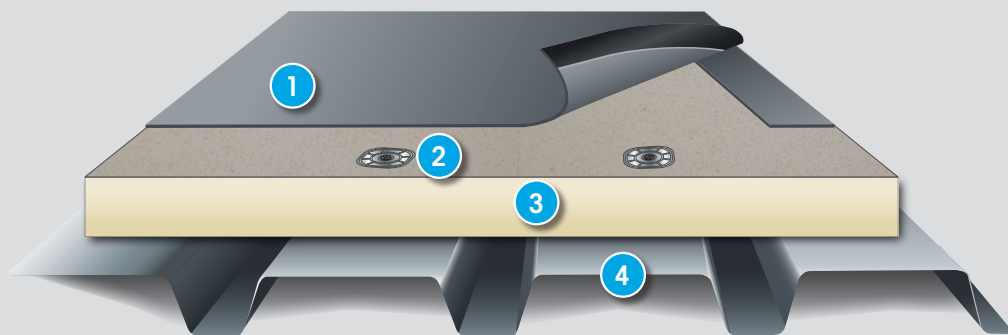

### Typical Application

- 1 VersiGard® QA EPDM with Quick-Applied Tape (QAT)
- 2 Versico Fasteners and SecurFast™ or AccuTrac® Plates
- 3 Acceptable Insulation
- 4 Approved Roof Deck

Color	Black and White*
Standard Thickness	60-mil
Standard Width	10'
Standard Lengths	50' and 100'

\*White available in non-reinforced only

### System Features and Benefits

- Minimize disruption on occupied buildings from the speed of installation and a lack of bonding adhesive odor
- Splices are completed with time tested and trusted VersiGard QAT Seam Technology
- Over 60 years of proven EPDM membrane performance
- Industry leading UV and hail resistance
- QA membrane installs 4.8 times faster completing projects in less time
- Can be installed on steep slopes

### VersiGard QA Non-Reinforced EPDM Membrane

Versico's VersiGard QA (Quick-Applied) Non-Reinforced EPDM Membrane is available in Black and White and offers excellent weatherability and hail resistance, provides significant labor savings, and qualifies as a Low-VOC option with no solvent-related odors. VersiGard QA is a nominal 60-mil non-reinforced EPDM membrane laminated to a 100%-solid pressure-sensitive adhesive and is available in 10' x 100' and 10' x 50' (3m x 30m and 3m x 15m) rolls.

### VersiGard QA Reinforced EPDM Membrane

Versico's VersiGard QA Reinforced EPDM membrane offers added puncture resistance, significant labor savings, and qualifies as a Low-VOC option with no solvent-related odors. VersiGard QA EPDM is a nominal 60-mil reinforced EPDM membrane laminated to a 100%-solid pressure-sensitive adhesive and is available in 10' x 100' and 10' x 50' (3m x 30m and 3m x 15m) rolls. The release liner is silicone-coated on one side for consistent release from the adhesive.



# **VERSIGARD QA EPDM**



## An Ideal Re-Roofing Solution

**Convenience:** No fumes or odors to disrupt building occupants

**Value:** Up to 80% labor savings to help get the job completed quickly

**Performance:** 20-year, 55-mph warranties available

## Installation

Versico's Quick-Applied roofing system utilizes 60-mil VersiGard membrane.

Insulation is either mechanically fastened to the roof deck every two square feet, adhered with Flexible DASH Adhesive or other Versico approved insulation adhesive. VersiGard QA membrane is adhered to the insulation. Adjoining sheets of EPDM are spliced together a minimum of 3" using Versico's 30-mil Quick-Applied Seam Tape.

## System Codes

- UL Class A and B ratings are available over most deck types
- FM uplift ratings up to 1-150 are available

For code specifics, refer to Versico's Code Approval Guide.

## Warranty

Consult your Authorized Contractor, Independent Sales Representative or Distributor for associated warranty changes.

Versico's VersiGard QA EPDM system, when properly installed and inspected on a commercial project, is backed by Versico's industry leading Total System Warranty. Up to twenty year Total System Warranty is available when all materials used for the roofing installation are manufactured or marketed by Versico. A maximum peak gust wind speed coverage of 55 miles per hour is standard. Additional wind speed coverage is available based on system/component upgrades. In addition, a 1" hail warranty is available with 60-mil EPDM.



Existing or New Deck Type	New Construction						Re-roofing		
	Steel	Plywood or OSB	Lt. Wt. Concrete	Structural Concrete	Wood Planks	Gypsum & Fibrous Cement	Smooth-Surface BUR	Gravel Surfaced BUR	Existing Single-Ply
Insulation Required	Yes	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Recommended Insulation	Versico Polyiso or Cover Board over Polystyrene								
Insulation Attached By	Flexible DASH Adhesive (non-penetrating) or Versico Fasteners and SecurFast or AccuTrac Plates								
Membrane Attached By	Factory-Applied Self Adhesive								

FOR TEAR OFF OPTIONS REFER TO NEW CONSTRUCTION ABOVE.

For current code approvals, warranties and specifications and details, visit Versico's web site or contact Project Review.

\* Refer to Versico's Adhered Design Criteria portion of the current specification for requirements.



**A SINGLE SOURCE FOR SINGLE-PLY ROOFING**

800.992.7663 • [www.versico.com](http://www.versico.com)