


Fully Adhered System - Over Aged Single-Ply Membrane

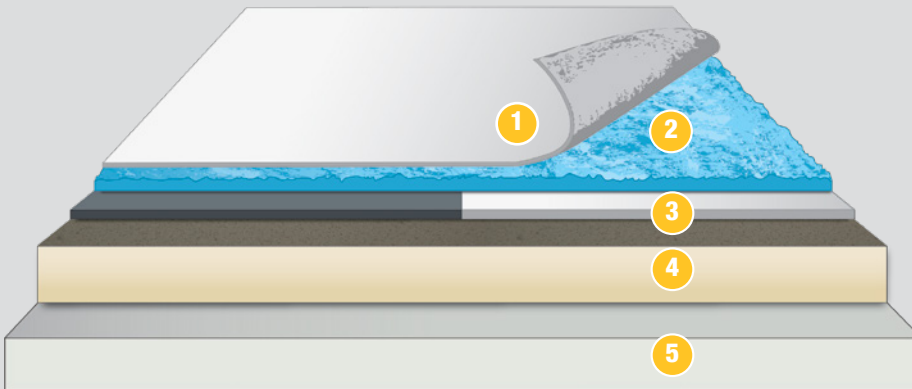

Typical Application

- 1 VersiFleece EPDM, TPO, PVC, or KEE HP Membrane
- 2 Flexible DASH Adhesive
- 3 Aged Single-Ply Membrane
- 4 Existing Insulation
- 5 Existing Roof Deck

VersiFleece Membranes for adhered roofing systems are available in the following:

Membrane	Thicknesses	Color
VersiFleece TPO	100-mil 115-mil 135-mil	White, Gray, and Tan White, Gray, and Tan* White, Gray, and Tan
VersiFleece EPDM	100-mil 115-mil 145-mil	White and Black White and Black White and Black
VersiFleece PVC	115-mil and 135-mil	White, Gray, Tan, Light Gray and Slate Gray
VersiFleece KEE HP	105-mil, 115-mil, and 135-mil	White, Gray, Tan, Light Gray, and Slate Gray

*Five special colors are available: medium bronze, patina green, rock brown, terra cotta, and slate gray

Retrofit Roofing System

For many years, Versico's VersiFleece adhered roofing system has been used to successfully retrofit over existing aged single-ply roofing systems. A retrofit VersiFleece adhered system provides a quick, non-intrusive and economical recover option for owners seeking a new 15- or 20-year warranty.

This retrofit option consists of a VersiFleece EPDM, TPO, PVC, or KEE HP membrane adhered to an acceptable aged single-ply roofing membrane (adhered or mechanically attached) using Flexible DASH Adhesive.

Please reference the guide-spec for information regarding products, warranty options, and installation. For installation advice, please contact your local Field Service Representative or VersiFleece Technical Specialist.

System Features & Benefits

- Ideal for occupied buildings
- Non-penetrating, low noise, low odor
- Flexible DASH adhesive is VOC free
- Flexible DASH adhesive provides an additional R-value of 0.2 to 0.5 per layer installed when used in full coverage application
- 33 - 50% greater puncture resistance compared to standard membranes
- 33 - 66% increased hail protection when compared to standard membranes (protects up to 4" hail)
- Minimizes disposal and landfill costs
- Increases productivity on the roof, which results in a solution for cost of labor



Roof Deck/Substrate Criteria

A proper substrate shall be provided by the building owner. The structure shall be sufficient to withstand normal construction loads and live loads.

Defects in the roof deck must be reported and documented to the specifier, general contractor, and building owner for assessment.

When the application is VersiFleece directly over aged single-ply membrane, the use of like-color membrane is required.

Prior to direct application over aged single-ply, the existing membrane must be power-washed and allowed to dry. If excessive dust or dirt is present, Versico's X-Tenda Coat™ General Purpose Cleaner must be used prior to power-washing.

Warranty

Consult your Authorized Contractor, Versico Independent Sales Representative or Distributor for warranty options and associated warranty charges.

Versico's Fully Adhered VersiFleece membrane over aged single-ply systems are backed by our industry leading Total System Warranty. Five to twenty year total system warranties are available with optional hail and limited accidental puncture upon request. Refer to Versico's Warranty Coverage Options for details.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com