


VERSIFLEX™ PVC/KEE HP

Fully Adhered Roofing System

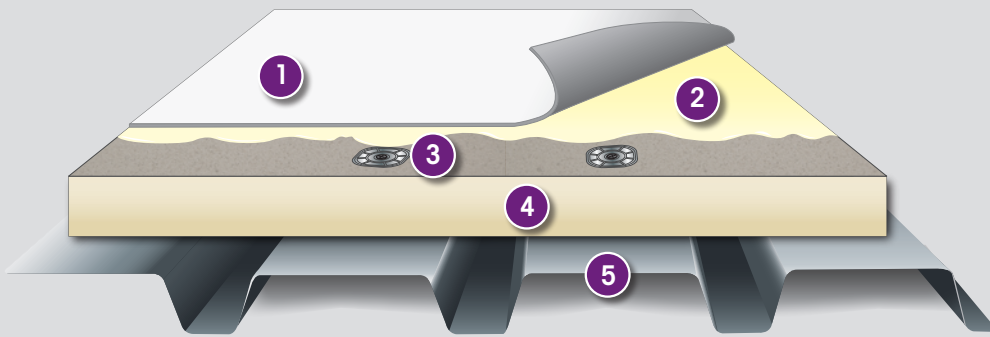

Typical Application

- 1 VersiFlex PVC or KEE HP Reinforced Membrane
- 2 Bonding Adhesive
- 3 Fasteners and Plates
- 4 Approved Versico Insulation
- 5 Approved Roof Deck

Colors	PVC: White, Gray, Tan, Light Gray, and Slate Gray KEE HP: White, Gray, Tan, and Light Gray
Standard Thicknesses	50-, 60- and 80-mil
Standard Widths	PVC - 40.5", 81", 5', 10' KEE HP - 5', 10'
Standard Lengths	50-mil: 100' 60-mil: 100' 80-mil: 75'

System Features and Benefits

- Meets CRRC, LEED®, and Title 24 guidelines (white and light gray)
- Heat-weldable membranes
- UL/FM codes and approvals
- Highly solar reflective "cool" membrane saves on-air conditioning costs
- Enhanced physical property characteristics for long-term weatherability
- Excellent chemical resistance to acids, bases, restaurant oils, and greases

VersiFlex PVC and KEE HP Membranes

Versico's VersiFlex PVC and KEE HP are high-performance, heat-weldable, single-ply membranes that provide outstanding long-term performance in new construction and re-roofing applications. VersiFlex KEE HP membranes utilize the highest grade of DuPont™ Elvaloy® to ensure the membrane can withstand extreme climatic conditions.

VERSIFLEX PVC/KEE HP



An Ideal Re-Roofing Solution

Convenience: No drilling needed to fasten the membrane and disrupt building occupants

Value: Variety of adhesive options to speed up application

Performance: Highly reflective and chemically resistant roof system

Certified Fabricated Accessories

Versico also offers over a dozen prefabricated, in-stock accessories, and countless custom-order accessories. All carry a CFA (Certified Fabricated Accessory) stamp of approval, so you know they've been manufactured to the highest quality standards. Every Versico CFA saves you time and money during installation.

Fully Adhered Roofing System Installation

VersiFlex membrane sheets are fully adhered to acceptable insulation or substrate with Versico's CAV-GRIP PVC Adhesive (PVC only), PVC Bonding Adhesive, or HydroBond Bonding Adhesive (PVC only). Adjoining sheets are hot-air welded.

The above information represents a typical Versico VersiFlex Fully Adhered Roofing System. Refer to Versico's published specifications and details for more complete information.

System Codes

- UL Class A, B and Unlimited Slope ratings are available over standard roof deck types
- FM uplift values up to 285 psf can be achieved.

For specific code approvals, refer to Versico's VersiFlex Code Approval Guide.

Warranty

Consult your Versico Authorized Contractor, Independent Sales Representative, or Distributor for associated warranty charges.

Versico's PVC/KEE HP Fully Adhered roofing systems are backed by our industry leading Total System Warranty provided all materials are manufactured or marketed by Versico. Five to thirty year total system warranties are available.

Existing or New Deck Type	New Construction						Re-roofing		
	Steel	Plywood or OSB	Lt. Wt. Concrete	Structural Concrete	Wood Planks	Gypsum & Fibrous Cement	Smooth-Surface BUR	Gravel-Surfaced BUR	Existing Single-Ply
Insulation Required	Yes	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Recommended Insulation	Versico Polyiso, OSB, Versico Recovery Board, DensDeck® Prime or Approved Insulation over Versico Polystyrene						← Refer to New Construction		
Insulation Attached By	Urethane Foam Adhesive, Insultite or Versico HPV Fasteners						Refer to Specifications		
Membrane Attached By	For PVC: CAV-GRIP PVC Adhesive, PVC Bonding Adhesive or HydroBond Bonding Adhesive For KEE HP: PVC Bonding Adhesive						← Refer to New Construction		

FOR TEAR-OFF OPTIONS, REFER TO NEW CONSTRUCTION ABOVE.
For current Code Approvals and Warranties, visit Versico's web site, or contact a design analyst.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com