


INJECT VapAir Seal Flashing Foam PER SPECS & ALLOW TO SOLIDIFY. SHAVE PROTRUSIONS TO ACHIEVE SMOOTH SURFACE

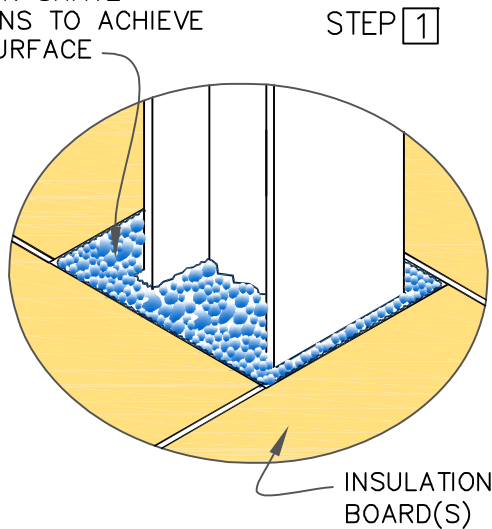

GRIND METAL WITH DIAMOND CUP GRINDING WHEEL

MEMBRANE SECURED WITH PLATES & FASTENERS PER SPECS

STEP 2



NOTE: ENSURE BODY OF PENETRATIONS & WELDS ARE COMPLETELY WATERPROOF.

DIAMOND CUP GRINDING WHEEL

STEP 3




USE SAND PAPER GRIT# 60 TO ABRAD THE MEMBRANE SURFACE.

STEP 4




REMOVE ALL GRINDING DUST, CLEAN METAL & MEMBRANE WITH CLEAN RAGS & MEMBRANE CLEANER.

STEP 5

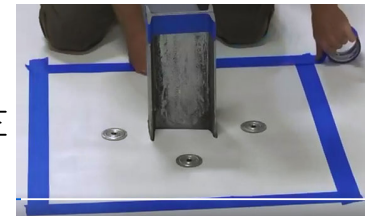

USE PAINTER'S TAPE AND TAPE OFF THE FLASHING AREA.



MEASURING, CUTTING & DRY FITTING TECHNIQUE




STEP 6

VERTICAL HEIGHT 6" MIN. (15cm)

STEP 8 MAKE FINGER CUTS 2" (5cm) LONG IN LIQUISEAL Flashing Fleece AS SHOWN. THE FINGERS WILL REST ON THE HORIZONTAL SURFACE. SEE ENLARGED VIEW "1" ON PAGE 2 OF 2.

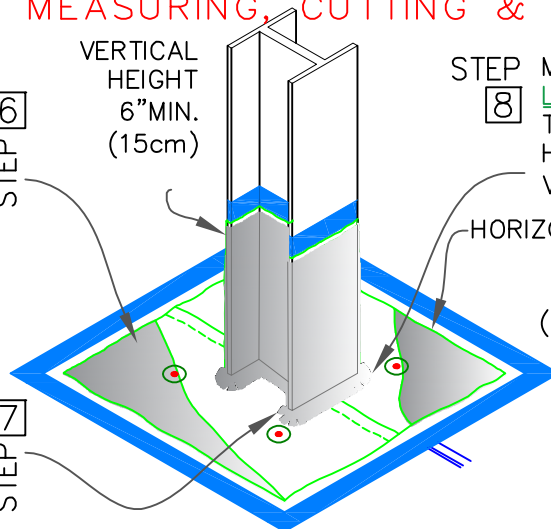


STEP 7

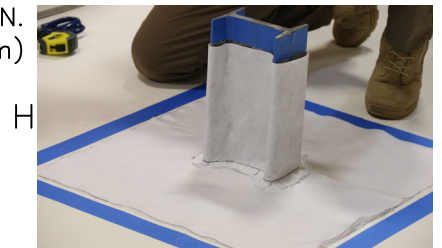

	ROOF MEMBRANE
	LIQUISEAL Flashing Fleece
	LIQUISEAL Liquid Flashing Resin
	SEE NOTE(S)

STEEL I-BEAM FLASHING (PAGE 1 OF 2)

For additional information, refer to Specifications




DETAIL NO.


LF-30.1

LIQUID FLASHING

SACHET MIXING AND PRIMER APPLICATION

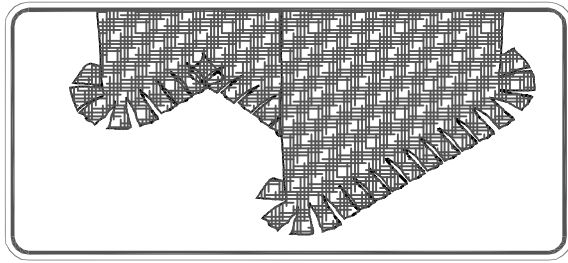


STEP 9



PRIME I-BEAM AND METAL PLATES. ENSURE AMBIENT AIR TEMPERATURE IS 40' & RISING. ALLOW PRIMER TO CURE UNTIL TACK-FREE.

STEP 10

APPLY 1ST COAT OF LIQUISEAL Liquid Flashing Resin & INSTALL LIQUISEAL Flashing Fleece ON VERTICAL SURFACES.




K

FLASHING FINAL INSTALLATION

STEP 11


IMMEDIATELY APPLY A 2ND COAT OF LIQUISEAL Liquid Flashing Resin ENSURING THE FLEECE IS COMPLETELY SATURATED.



L


APPLY 1ST COAT OF RESIN AND INSTALL FLEECE ON HORIZONTAL SURFACES. IMMEDIATELY APPLY A 2ND COAT OF RESIN ENSURING FLEECE IS COMPLETELY SATURATED.

STEP 12



M


STEP 13




N

TOUCH UP AS NEEDED TO ENSURE ENTIRE FLEECE IS COMPLETELY SATURATED.

FLEECE MUST BE COVERED 1/4" - 1/2" (1cm - 1.5cm) BEYOND EDGES



STEP 14

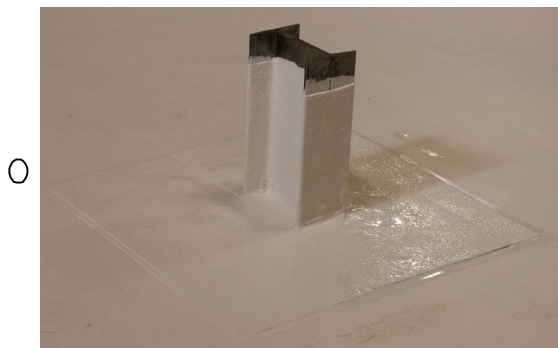


O

REMOVE TAPE IMMEDIATELY ENSURING THAT RESIN EXTENDS 1/4" - 1/2" (1cm - 1.5cm) BEYOND EDGE OF FLEECE

COMPLETED FLASHING

NOTE:
1. DETAIL NOT FOR USE ON WARRANTY PROJECTS EXCEEDING 20-YEARS. UNLESS OTHERWISE SPECIFIED.

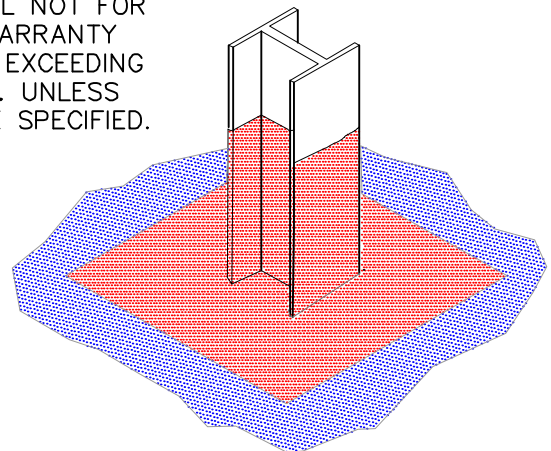

	<ul style="list-style-type: none"> — ROOF MEMBRANE — LIQUISEAL Flashing Fleece — LIQUISEAL Liquid Flashing Resin 0 — SEE NOTE(S) 	<p>STEEL I-BEAM FLASHING (PAGE 2 OF 2)</p> <p>For additional information, refer to Specifications</p>		<p>DETAIL NO. LF-30.1 LIQUID FLASHING</p>
--	--	---	--	---