

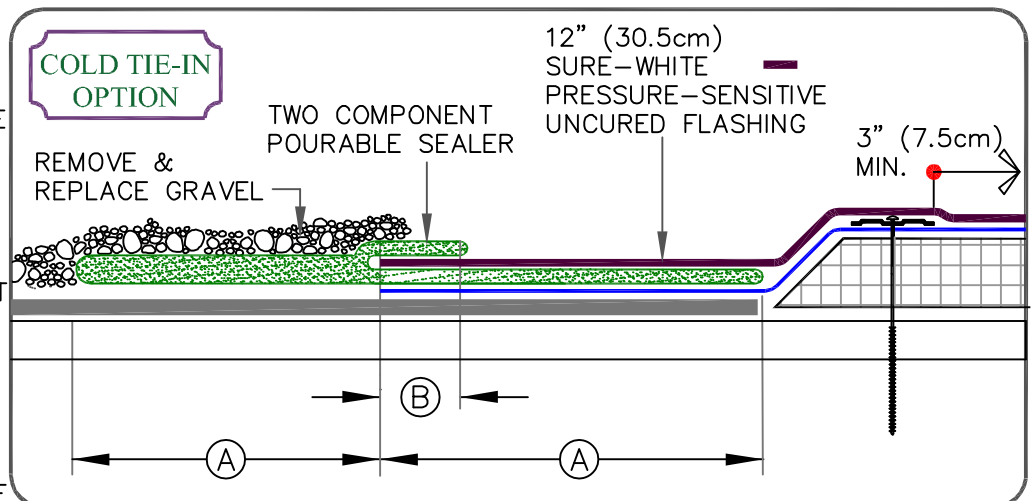
NOTES:

1. REMOVE ALL GRAVEL AT TIE-IN.
2. SPLICE TWO PIECES OF WHITE PRESSURE-SENSITIVE UNCURED FLASHING TOGETHER TO ACHIEVE DESIRED WIDTH.
3. WATER CUT-OFF MASTIC MUST BE HELD UNDER CONSTANT COMPRESSION.
4. CARLISLE IS NOT RESPONSIBLE FOR DAMAGE TO THE BUILT-UP ROOF OR STRUCTURAL DECK RESULTING FROM PONDED WATER; THIS DETAIL APPLIES TO RE-ROOFING WHEN A TEAR-OFF IS NOT SPECIFIED AND WAS DESIGNED TO PREVENT MIGRATION OF WATER WITHIN THE NEW ROOFING SYSTEM.
5. ACHIEVE SMOOTH SURFACE ON TOP.

FASTENER AND PLATE TYPE
(STRUCTURAL CONCRETE DECK)

OPTION	FASTENER	PLATE
A	CD-10	PIRANHA
B	HD 14-10	PIRANHA

DIMENSIONS	cm	
(A)	6"	15 MIN.
(B)	2"	5 ±1/2"(1.5cm)
(C)	6"	15 MIN.
(C)	12"	30 MAX.

TPO TIE-IN TO BUILT-UP ROOFING
OVER CONCRETE ROOF DECK

MAXIMUM WARRANTY: 30 YEARS



DETAIL NO.

U-13B