


SecurEdge™ 4000 HP Gutter

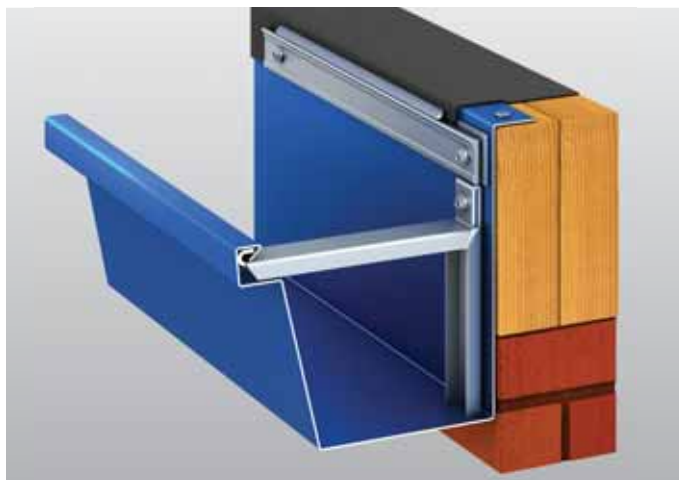

Overview

Carlisle's 7" heavy-duty SecurEdge 4000 HP Gutter system for single-ply roofs is available in .040" (1.00 mm) formed aluminum as well as 24-gauge Kynar 500®-coated Galvalume steel. Offered in 10' (3048 mm) standard lengths, brackets and fasteners are spaced 24" on center and are included with purchase.

Features and Benefits

- » Strongest gutter system on the market
- » High-performance bracket system
- » ANSI-SPRI ES-1 Certified
- » Florida Building Code Approved
- » Corporate and custom colors are available
- » Mill finish aluminum and clear anodized finishes are available
- » 35-Year Gold Standard Transferrable Paint Warranty

Installation

For complete installation instructions, refer to Carlisle specifications and details or visit www.carlislesyntec.com.

Quality Assurance

This product is tested per ANSI/SPRI Test Method GD-1/GD-2/GD-3 Structural Design Standard for Gutters Used with Low-Slope Roofs. Gutter is certified by Carlisle to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems used with Low-Slope Roofing Systems. This product meets International Building Code.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

Specifications

Material	Size	Sustained Pressures
24-gauge	7"	G-1 Horizontal: -200 (*) G-2 Vertical: -50 (*) G-3 Static: -430 psf (*)
0.040 Aluminum	7"	G-1 Horizontal: -220 (*) G-2 Vertical: -60 (*) G-3 Static: -430 psf (*)

* Design Engineer must apply the Factor of Safety.

ADDITIONAL GAUGES - .050 and .063 aluminum and 22-gauge Galvalume are available upon request.