


VersiCore® Polyiso

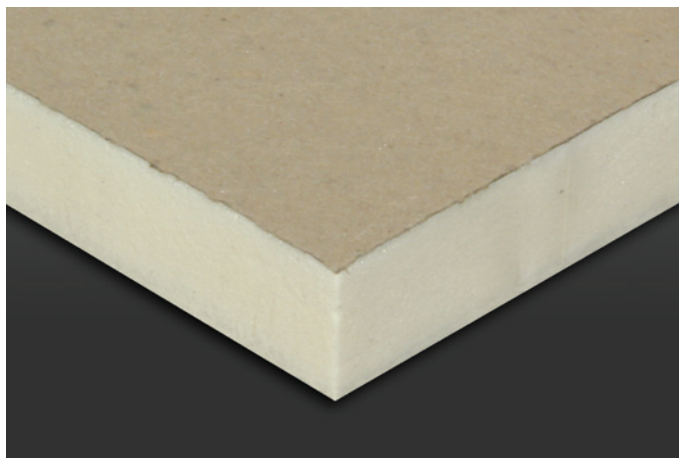

Overview

VersiCore is a rigid-roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded on each side to glass-reinforced felt (GRF).

Features and Benefits

- VersiCore polyiso insulation provides the highest R-value per inch of commercially available insulation products
- Zero ozone-depleting components, HFC- and HCFC-free formulation
- Approved for direct application to steel decks

Panel Characteristics

- Available in 4' x 4' (1220 mm x 1220 mm) and 4' x 8' (1220 mm x 2440 mm) panels in thickness of ½" (13 mm) to 4.5" (115 mm)

Applications

- Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)



Sustainable Attributes

Versico Roofing Systems' focus has always been innovation – Innovation to solve problems, improve performance, reduce labor, and above all, improve sustainability. Versico is committed to driving sustainable and efficient processes in the design and manufacturing of our products.

- Zero ozone-depleting components, HFC- and HCFC-free formulation
- CDPH Compliant for maximum allowable concentrations of target VOCs
- Up to 56.2% recycled content by weight (36.6% post-consumer/20.3% pre-consumer)
- Contributes to LEED® and Green Globes certification requirements
- End-of-life jobsite disposal options available for re-use/re-purposing
- Versico Polyiso Roof Insulation and HD Cover Board EPDs available
- PIMA Quality Mark^{CM} Certification Program participant for Long-Term Thermal R-values (LTTR)
- Highest R-value per inch providing maximum energy savings and CO₂ emissions avoidance

Polyiso Eco Ready (Optional)

- 5% bio-content option available (for 2.0" and 2.6" thicknesses)
- Contributes to carbon reduction initiatives via mass balance approach under ISCC PLUS compliance

Installation

Ballasted Single-Ply Systems

Each VersiCore panel is loosely laid on the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

Mechanically Attached Single-Ply Systems

VersiCore panels must be secured to the roof deck with fasteners and plates (appropriate to the deck type). Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

Fully Adhered Single-Ply Systems

VersiCore panels must be secured to the roof deck with fasteners and plates (appropriate to deck type). Butt edges and stagger joints of adjacent panels. Install the roof membrane according to Versico's specifications.

VersiCore 4' x 8' panels can be secured to the roof deck with Versico's Flexible DASH™ Adhesive, either full coverage or bead spacing.

VersiCore 4' x 4' panels may be adhered to prepared concrete deck with a full mopping of Type III or IV asphalt.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.



VersiCore Polyiso

Codes and Compliances

- ASTM C1289, Type II, Class 1, Grade 2 (20 psi), Grade 3 (25 psi)
- International Building Code (IBC) Section 2603
- UL Standard 790, 263 and 1256: Component of Class A Roof Systems (refer to UL Roof Materials' system directory)
- FM® Standards 4450/4470: Class 1 approval for steel roof-deck constructions (refer to FM RoofNavSM)
- California Code of Regulations, Title 24, Insulation Quality Standard License #TI-1418
- Third-party certification with the PIMA QualityMark^{CM} for Long-Term Thermal Resistance (LTTR) values
- CAN/ULC S704, Type 2, Class 3 (20 psi), Type 3, Class 3 (25 psi)
- Florida Building Code Approval
- CDPH compliant for maximum allowable concentrations of target VOCs

Precautions

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof-covering material. Protect installed product from excessive foot traffic. Versico will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Versico for more specific details, or refer to PIMA Technical Bulletin No. 109: Storage & Handling Recommendations for Polyiso Roof Insulation.

Typical Properties and Characteristics

Physical Property	Test Method	Value
Compressive Strength	ASTM D1621	20 psi* minimum (138 kPa, Grade 2)
Dimensional Stability	ASTM D2126	2% linear change (7 days)
Moisture Vapor Permeance	ASTM E96	<1 perm (57.5 ng/(Pa•s•m ²))
Water Absorption	C1763	<1% volume


Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

*Also available in 25 psi minimum, Grade 3

VersiCore Polyiso Thermal Values

Thickness (inches)	LTTR R-value	Thickness (inches)	LTTR R-value
0.5	2.8	2.75	15.9
0.75	4.2	2.8	16.2
1	5.7	2.9	16.8
1.1	6.3	3	17.4
1.2	6.8	3.1	18
1.25	7.1	3.2	18.6
1.3	7.4	3.25	18.9
1.4	8	3.3	19.2
1.5	8.6	3.4	19.9
1.6	9.1	3.5	20.5
1.7	9.7	3.6	21.1
1.75	10	3.7	21.7
1.8	10.3	3.75	22
1.9	10.8	3.8	22.3
2	11.4	3.9	23
2.1	12	4	23.6
2.2	12.6	4.1	24.2
2.25	12.9	4.2	24.9
2.3	13.2	4.25	25.2
2.4	13.8	4.3	25.5
2.5	14.4	4.4	26.1
2.6	15	4.5	26.8
2.7	15.6	–	–

Flute Spanability is 2%" for 1.4" or thickness or smaller. Flute Spanability is 4%" for 1.5" thickness or greater.

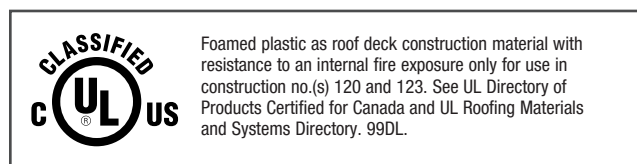

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com