


SecurEdge™ METAL

Gravel Stop

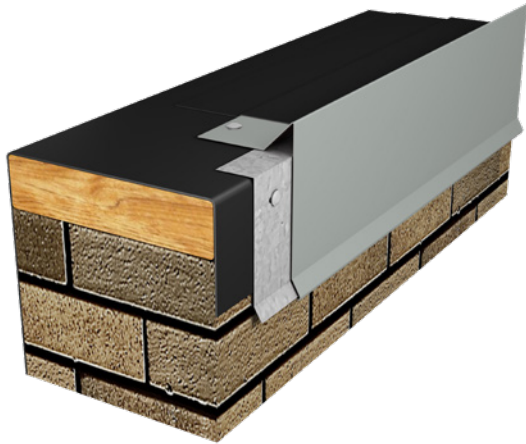

Overview

Carlisle's SecurEdge Gravel Stop features a gravel stop cover and a 22GA "L"-shaped continuous cleat with pre-slotted fastening holes for ease of locating and installing provided fasteners. It is manufactured in 12' lengths so there are fewer joints, seams, and sections to handle for faster installations.

Features and Benefits

- » Variety of face heights available with or without cleat
- » Interlocking, concealed splice plates prevent moisture migration
- » Manufactured in convenient 12' lengths with pre-punched fastening holes that allow for thermal movement and ensure correct fastener placement
- » Factory-fabricated miters and accessories ensure a proper fit and provide a cleaner appearance while eliminating the need for field fabrication
- » ANSI/SPRI/FM 4435/ES-1 tested to comply with International Building Code requirements
- » Factory Mutual approved
- » Miami-Dade and Florida Building Code approved

Installation

For complete installation instructions, refer to Carlisle specifications and details, or visit www.metalera.com/brands/carlisle.

Finishes

- » Natural mill-finish aluminum
- » Pre-finished Kynar® standard and low gloss
- » Premium metallic Kynar
- » Anodized aluminum – clear, dark bronze, and black
- » Drexlum™ – acrylic coated galvalume
- » HDG90 galvanized steel
- » Custom post-painted Kynar finishes (available upon request)
- » Please consult color chart for color and gauge/thickness availability, non-stock combinations require minimum orders and extended lead times

Quality Assurance

Tested per ANSI/SPRI Test Methods RE-1 and RE-2 for evaluation of membrane securement strength. Fascia shall be certified by Carlisle to design pressures as indicated in current edition of ANSI/SPRI ED-1 Design Standard for Edge Systems Used with Low-Slope Roofing Systems. Meets International Building Code requirements. Miami-Dade approved to comply with the High-Velocity Hurricane Zone of the Florida Building Code. Factory Mutual approved for wind uplift protection.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For personal assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

Specifications

Face Heights	3" (Min) 10" (Max)
Flange Widths	1" (Min) 4" (Max)
Cover Materials	24GA Steel 22GA Steel 0.040" Aluminum 0.050" Aluminum 0.063" Aluminum

Warranty

Carlisle's SecurEdge Gravel Stop is warranted in conjunction with the roofing system, in an Edge-to-Edge warranty up to 30 years with 100 mph windspeeds. A non-prorated 35-year Kynar finish warranty is also available.