


# InsulFoil SP

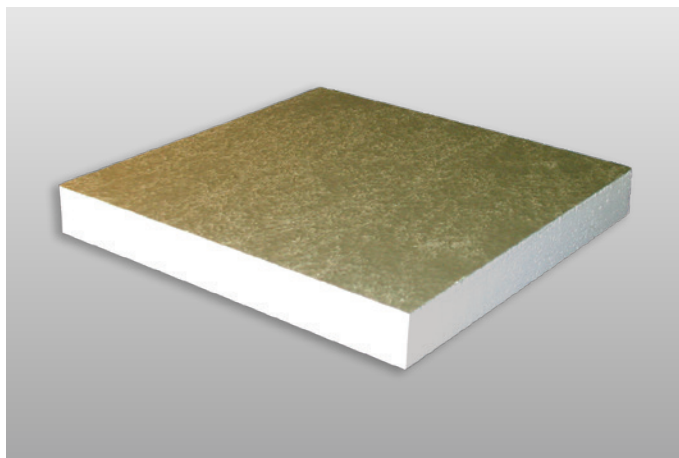

## Overview

InsulFoil SP is an engineered insulation consisting of a superior closed-cell, lightweight and resilient expanded polystyrene (EPS) with a durable and stable, factory-laminated coated glass facer. InsulFoil SP is available in a nominal density of 1lb/ft<sup>3</sup> or 1.25lb/ft<sup>3</sup>, and meets or exceeds the requirements of ASTM C578, Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation. In addition, InsulFoil SP offers a long-term, stable R-value and has excellent dimensional stability, compressive strength and water resistance properties.

InsulFoil SP is specifically designed for low-sloped roof applications that employ mechanically fastened or ballasted TPO, PVC and EPDM, as well as low-sloped built-up, modified bitumen and fully adhered single-ply roofs that incorporate cover boards or slip sheets. InsulFoil SP is also designed for use in fully-adhered fleece membrane systems with compatible adhesives. Please consult local building codes and membrane manufacturers for system requirements.

## Features and Benefits

- **Code Approvals:** Insulfoam insulations are recognized in the International Code Council Evaluation Service (ICC-ES), and have numerous Underwriters Laboratory and Factory Mutual Approvals. Please contact your local Insulfoam representative for details.
- **Environmentally Friendly:** It does not contain any ozone-depleting blowing agents, may contain recycled material, and is 100% recyclable if ever removed or replaced.
- **Stable R-value:** The product's thermal properties will remain stable over its entire service life. There is no thermal drift, so the product is eligible for an Insulfoam 20-year thermal performance warranty.

- **Proven Performance:** EPS has been manufactured using the same chemistry since the mid-1950s, providing proven performance.
- **Water Resistance:** InsulFoil SP does not readily absorb moisture from the environment.

## Labor Saving Features and Benefits:

With a factory-laminated facer, InsulFoil SP saves labor time and reduces overall project costs, when incorporated into a roofing system that would otherwise require a slip sheet.



## Product Characteristics

InsulFoil SP is available in several standard thicknesses. Non-standard sizes may also be ordered; InsulRoof SP can be made up to a thickness of 6" (R-26), with a minimum thickness of 2" for 1 lb/ft<sup>3</sup> insulation and 1.5" for 1.25 lb/ft<sup>3</sup> insulation.

## Typical Properties and Characteristics

Physical Property	Test Method	Value	
Density (nom. pcf)	ASTM C303	1.00	1.25
R-Value (Resistance) - per inch (hr•ft <sup>2</sup> •°F)/BTU	ASTM C518 or ASTM C177		
@ 25 °F		4.35	4.55
@ 40 °F		4.17	4.25
@ 75 °F		3.85	3.92
C-Value (Conductance) - per inch BTU/(hr•ft <sup>2</sup> •°F)	ASTM C518 or ASTM C177		
@ 25 °F		0.230	0.220
@ 40 °F		0.240	0.235
@ 75 °F		0.260	0.255
Compressive Strength (psi, 10% deformation)	ASTM D1621	10 – 14	13 – 18
Flexural Strength (min. psi)	ASTM C203	25	30
Dimensional Stability (maximum %)	ASTM D2126	2.0	2.0
Water Vapor Permeance (max. perm., 1 inch)	ASTM E96	5.0	3.5
Water Absorption (max. % vol.)	ASTM C272	4.0	3.0

\* Properties are based on data provided by resin manufacturers, independent test agencies and Insulfoam.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • [www.versico.com](http://www.versico.com)