


# 2" Seam Fastening Plates

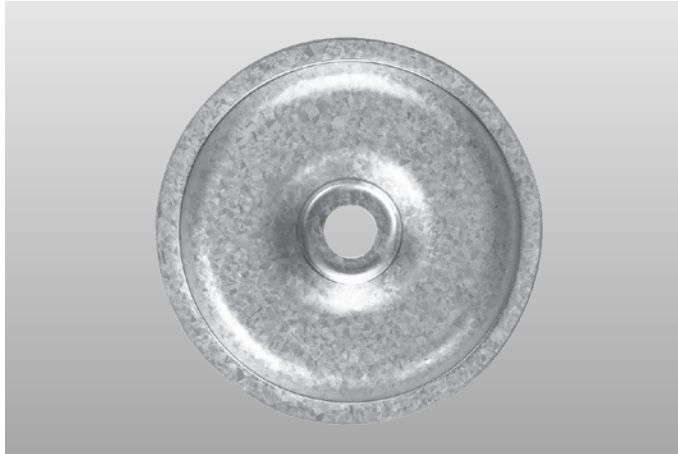

## Overview

Versico's 2" Seam Fastening Plates are specifically designed for use with Reinforced Termination Strip (RTS) or membrane securement for reinforced EPDM. When specified in the current Versico specifications and details, the plates can be used at angle changes with VersiGard® Reinforced EPDM, VersiWeld® TPO, or VersiFlex™ PVC membranes.

## Features and Benefits

- Compatible with Versico's HPV Fasteners, Purlin Fasteners, HPVX Fasteners, MP 14-10 Fasteners, and CD-10 Fasteners.
- Symmetrical lead distribution.

## Installation

1. Position 2" Seam Fastening Plates as indicated by Versico specifications and details.
2. Secure 2" Seam Fastening Plates with the appropriate Versico fastener.

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

## Precautions

- Eye Protection is recommended during drilling and installation of fasteners.
- Use care to avoid over driving the fastener.

## Typical Properties and Characteristics

Property	Value
Size	2" Diameter (50 mm)
Weight/Carton	22 lbs. (10 kg)
Quantity	1,000/carton
Material	Galvalume® Coated Steel
Thickness	22 Gauge
Pull Through Resistance	500 lb./min. (225 kg/min.)
Corrosion Resistance	Galvalume Coated Steel meets the FM 4470 corrosion test
Compatibility	Accepts Versico's HPV Fasteners, Purlin Fasteners, HPVX Fasteners, MP 14-10 Fasteners, and CD-10 Fasteners.

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.