


SecurEdge™ METAL

Snap-On Canted Fascia

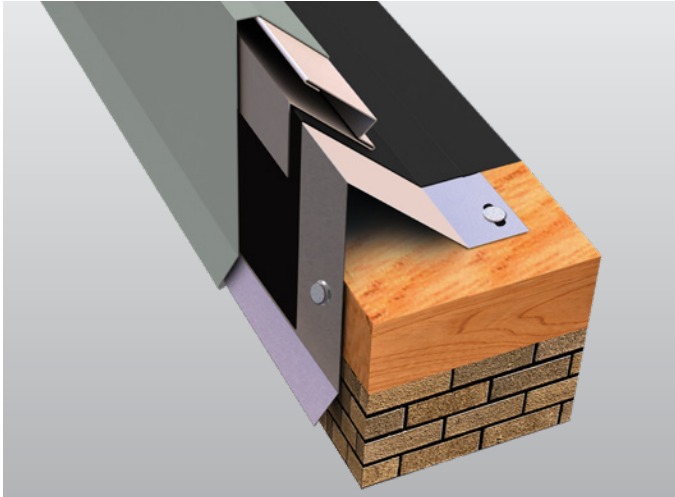

Overview

The SecurEdge Snap-On Canted Fascia features a snap-on cover that eliminates crimping, substantially reducing installation time. This formed, two-piece fascia system can be used with all single-ply roof membranes and is especially popular on stone ballast single-ply roofs. Dual attachment points on both the face and roof deck allow for added flexibility when accommodating roof irregularities. Its unique design allows for covers to be manufactured in 24 ga galvanized steel, 22 ga galvanized steel, .040", .050" and .063" aluminum.

No exposed fasteners, no unsightly cover plates and ease of installation distinguish this ANSI/SPRI/FM 4435/ES-1 tested roof edge system.

Features and Benefits

- » No need for the stripping-in or heat-welding that are typical with other systems
- » Manufactured in 12' lengths with pre-punched fastening holes in the 24GA galvanized waterdam to ensure correct placement and spacing of provided fasteners during installation
- » Simple snap-on covers with no crimping necessary
- » ANSI/SPRI/FM 4435/ES-1 tested to comply with International Building Code requirements
- » Miami-Dade Approved to comply with the High Velocity Hurricane Zone of the Florida Building Code
- » Factory Mutual approved for wind uplift protection
- » Factory-fabricated miters and accessories ensure a proper fit and provide a cleaner appearance while eliminating the need for field fabrication

Installation

For complete installation instructions, refer to Carlisle specifications and details, or visit www.metalera.com/brands/carlisle.

Finishes

- » Natural mill-finish aluminum
- » Pre-finished Kynar® standard and low gloss
- » Premium metallic Kynar
- » Anodized aluminum – clear, dark bronze, and black
- » Drexlume – Acrylic coated galvalume
- » HDG90 Galvanized Steel
- » Custom post-painted Kynar finishes available upon request
- » Please consult color chart for color and gauge/thickness availability, non stock combinations require minimum order and extended lead time

Quality Assurance

Tested per ANSI/SPRI/FM 4435/ES-1 Test Methods RE-1 and RE-2 for evaluation of membrane securement strength. Fascia shall be certified by Carlisle to design pressures as indicated in current edition of ANSI/SPRI ED-1 Design Standard for Edge Systems Used with Low Slope Roofing Systems. Meets International Building Code requirements. Miami-Dade Approved to comply with the High Velocity Hurricane Zone of the Florida Building Code. Factory Mutual approved for wind uplift protection.

Specifications

Fascia Model	'H' DIM	'X' DIM	No. of Nailers Covered
FA-50	5 1/4" (133 mm)	2 7/8" (73 mm)	1
FA-65	6 3/4" (171 mm)	4 3/8" (111 mm)	2
FA-80	8 1/4" (210 mm)	5 3/8" (149 mm)	3
FA-95	9 3/4" (248 mm)	7 3/8" (187 mm)	4
FA-110	11 1/4" (286 mm)	8 7/8" (225 mm)	5
FA-125	12 3/4" (324 mm)	10 3/8" (264 mm)	6

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For personal assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

SecurEdge™ METAL

Snap-On Canted Fascia

Warranty

Carlisle's SecurEdge Snap-On Canted Fascia is warranted in conjunction with the roofing system, in an edge to edge warranty up to 30 years with 100mph windspeeds. A non-prorated 35 year Kynar finish warranty is also available.

