
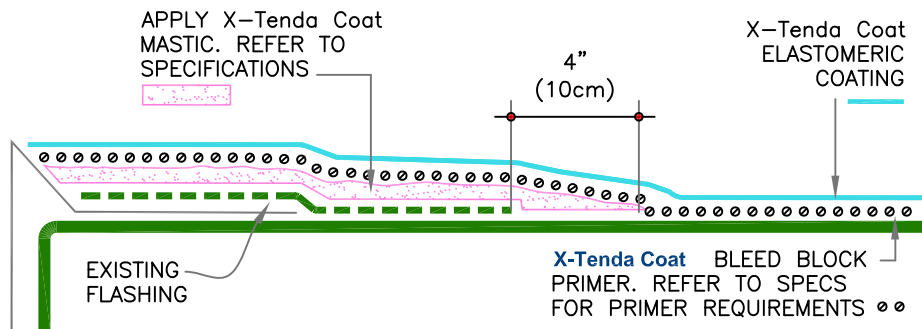



ROOF RESTORATION WITH ELASTOMERIC COATING

GUIDE NOTE

WHERE GUTTER EXISTS, TO MAINTAIN POSITIVE DRAINAGE, USE METAL DRIP EDGE WITHOUT DAM.

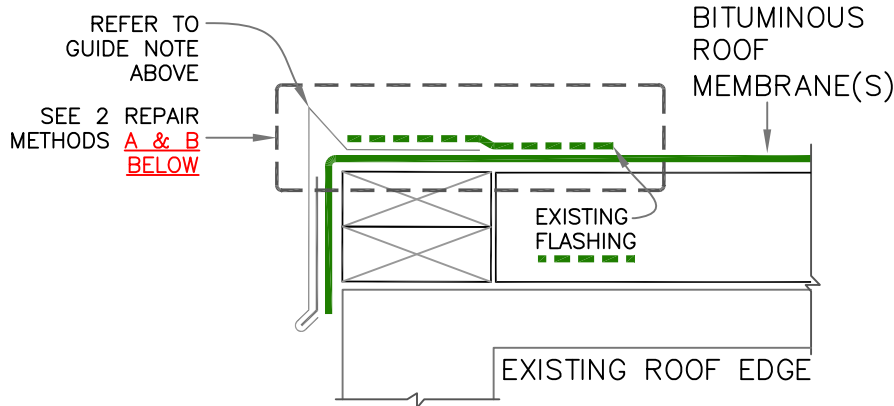

METHOD A: MASTIC APPLICATION

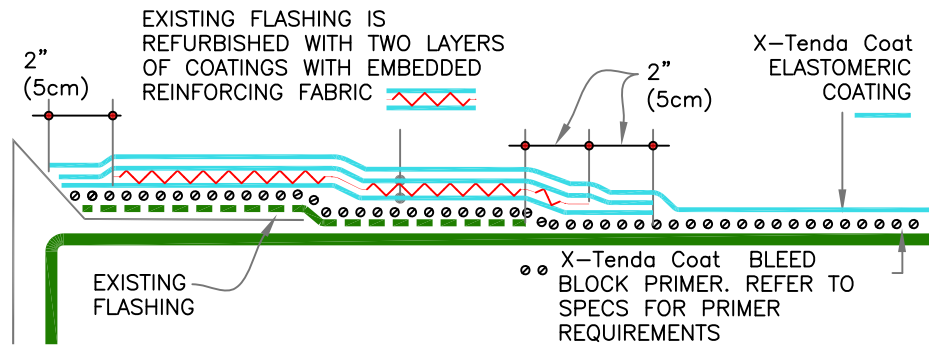

METHOD B: COATING WITH FABRIC

	METAL EDGE – BITUMINOUS ROOF: (APPLICABLE TO GUTTER EDGE ALSO)	X-Tenda Coat
	NEW COATING ON EXISTING LOW SLOPE ROOFS	A-2
	For additional information, refer to Specifications	