


VERSITRIM CRIMP-ON CANTED FASCIA

CRIMP-ON, SINGLE-PLY VERSION

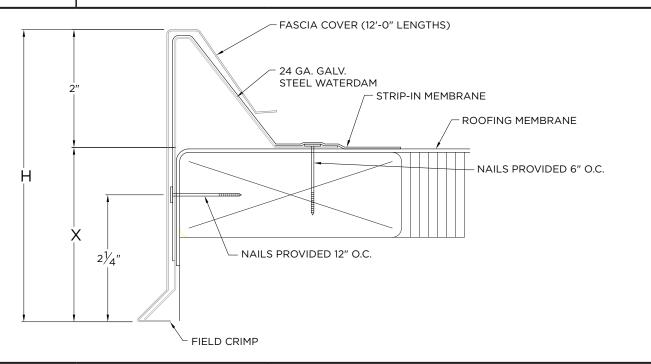

DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ FA-50	5"	3"	1 NAILER
FA-65	6 1/2"	4 1/2"	2 NAILERS
FA-80	8"	6"	3 NAILERS
☐ FA-95	9 1/2"	7 1/2"	4 NAILERS
FA-110	11"	9"	5 NAILERS
FA-125	12 1/2"	10 1/2"	6 NAILERS

MATERIAL

☐ 24 Ga. Galv. Steel
22 Ga. Galv. Steel
.040" Aluminum
.050" Aluminum

Substrate: □ Wood If substrate is not ☐ Masonry given, wood fasteners will be provided. □ Metal

QUANTITIES

 Lineal Feet (12'-0" Lengths)
Outside Miter (90°)

Inside	Miter	(90°)
		(,

 Right	Endcaps

Left Endcaps

☐ .063" Aluminum

OTHER:

Right Endwall Flashing

Left Endwall Flashing

Accessory Type:

☐ Quicklock (Default)

☐ Welded (Surcharge)

Overflow Scupper Style A Style B

Color: _____ Finish: __

Spillout Scupper Style A Style B

Downspout Scupper Style A Style B

Downspout Size __ Max. Downspout Size is 5" x 6" Custom print needed for larger sizes. Style A=Tapered 1.5" Drop | Style B=Flat

NOTES

- Fascia includes splice plate at joints
- Standard fascia will not function with TPO or PVC strip-in membrane thicker than .060"
- Oil canning can occur on larger face heights; recommend .050"" or .063"" for face heights above 8"
- Welded accessories require minimum material thickness of .050"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 196 psf

APPROVALS





DATE: **09/18/24**

DRN BY: JJC

DWG #: 18010-21635

MM

CKD BY:

ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

\mathbf{D}		
DDI 1	16.	
PRV		INFO

Date:

Customer Service

800-558-2162

(Metal-Era)

PROJECT INF	O
Project Name:	
Architect:	
Roofing Contractor:	
Project Type:	
	u have verified and ons, sizes, and quantities
are correct. All products will be installed in strict accordance with printed instructions.	SHT #: of