


Insulation

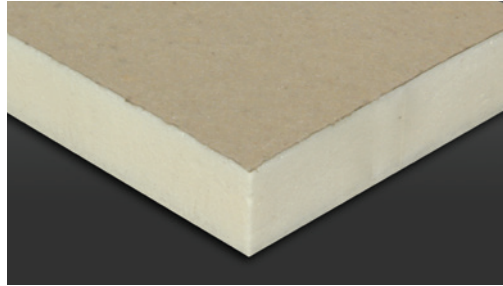


VersiCore® Polyiso

A rigid roof insulation panel composed of closed-cell polyisocyanurate foam core bonded to **glass-reinforced felt (GRF) facers**. UL and FM approved for direct application over steel decks, polyiso provides the highest R-value per inch of any commercially available insulation product.

Sizes: 4' x 4' and 4' x 8'

Thickness: ½" to 4½"

Compressive Strength: 20 and 25psi

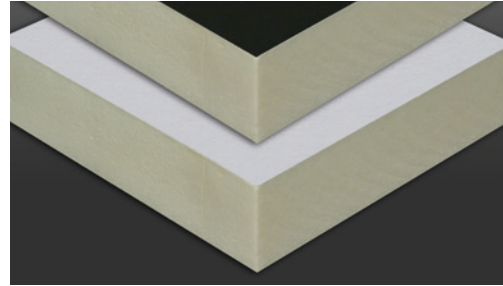

SecurShield®

ReadyFlash
TECHNOLOGY

A rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to high performance **coated glass facers (CGF)**. Ideal for use in adhered membrane systems. 1" achieves UL Class A fire rating over combustible decks.

Sizes: 4' x 4' and 4' x 8'

Thickness: ½" to 4½"

Compressive Strength: 20 and 25psi



DuraFaceR®


A rigid roof insulation **composite panel** composed of closed-cell polyisocyanurate foam core bonded to a glass-reinforced felt (GRF) facer on one side and ¾" **oriented strand board (OSB)** on the other.

Sizes: 4' x 4' (routed 3 sides)
4' x 8' (routed 4 sides)

Thickness: 1½" to 4½"

Typical Thickness: 1½", 2", 2½", 3" and 4"

A quick reference for ordering insulation for your next job.

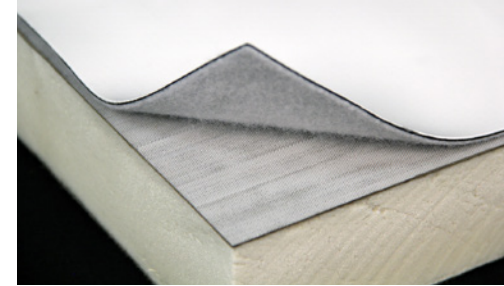

RapidLock Polyiso

VersiCore RL® and SecurShield RL are standard density polyisocyanurate roof boards specially designed to act as the hook in the RapidLock (hook and loop) system.

VersiCore RL utilizes a **GRF facer** and **SecurShield RL** utilizes a **CGF facer**.

Size: 4' x 8'

Thickness: 2.0" and 2.6"

Compressive Strengths: 20psi

SecurShield HD RL is a **high-density rigid roof polyisocyanurate board** bonded to **coated-glass (CGF) facers**.

Size: 4' x 8'

Thickness: 0.5"

Compressive Strengths: 109psi max




VersiCore NH and SecurShield NH

A Living Building Challenge (LBC) "Red List Free" rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to the appropriate facer. VersiCore NH and SecurShield NH contains zero halogenated flame retardants.

Sizes: 4' x 4' and 4' x 8'

Thickness: ½" to 4½"

Compressive Strength: 20 and 25psi

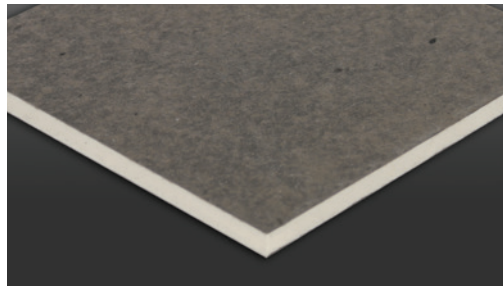


VersiCore HD

A rigid roof insulation panel composed of ½" high-density, closed-cell polyisocyanurate foam core bonded to **glass-reinforced felt (GRF) facers** specifically designed to be used as a **cover board** in mechanically-fastened or induction-welded systems only.

Sizes: 4' x 4' and 4' x 8'

Thickness: ½"

Compressive Strength: 80psi max

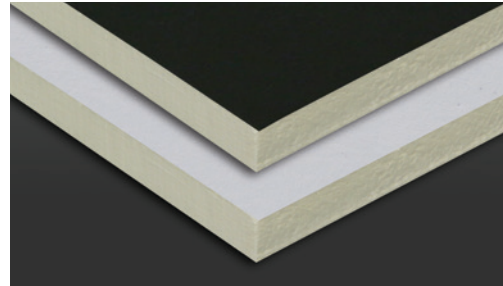

SecurShield HD


ReadyFlash
TECHNOLOGY

A rigid roof insulation panel composed of ½" high-density, closed-cell polyisocyanurate foam core bonded to a premium performance coated glass facer (CGF) specifically designed for use as a **cover board**. Provides 5 times the R-value at one-fifth the weight of traditional gypsum cover boards. ½" achieves UL Class A fire rating over combustible decks.

Sizes: 4' x 4' and 4' x 8'

Thickness: ½"

Compressive Strength: 109psi max

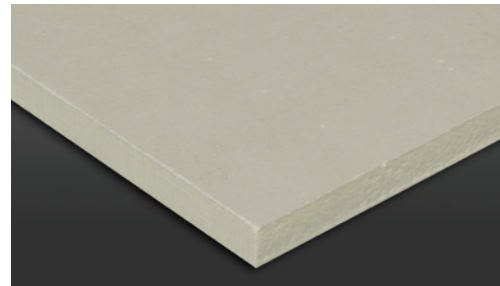


SecurShield HD Plus

A rigid roof insulation panel composed of a ½" high-density, closed-cell polyisocyanurate foam core bonded to a premium performance coated glass facer (CGF) specifically designed for use as a **cover board**. Enhanced performance of the HD Plus product provides a **FM 1-90 wind uplift rating with only 8 fasteners**.

Sizes: 4' x 4' and 4' x 8'

Thickness: ½"

Compressive Strength: 109psi max

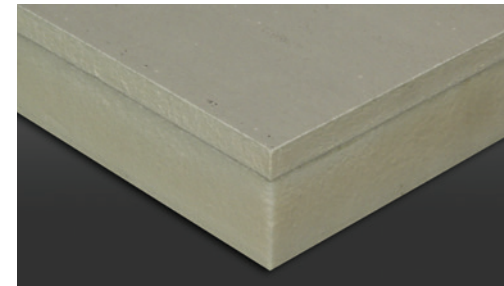


SecurShield HD Composite

A unique composite insulation panel comprised of ½" high-density polyiso cover board bonded during the manufacturing process to SecurShield rigid Polyiso roof insulation. Eliminates the need for a separate cover board, reduces interply adhesives and saves labor on the roof. **A single product solution** that provides a FM 1-90 wind uplift rating with only 6 fasteners and meets FM's Very Severe Hail (VSH) requirements.

Sizes: 4' x 4' (47.5" x 47.5") and 4' x 8' (47.5" x 95.5")

Thickness: 1.5", 2.0", 2.5", 3.0", 3.5", 4.0"

Compressive Strength: 20psi (SecurShield base layer) and 109psi max (SecurShield HD cover board)

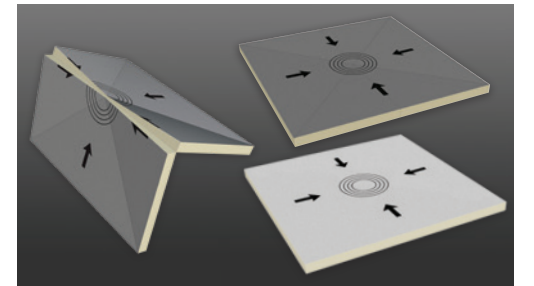

Target Sumps

A sloped, rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to a coated glass or fiber-reinforced facer. Designed to promote **positive drainage** and **prevent ponding water**.

Target Sumps ship ready to install, **require no field cuts and save valuable time on the roof**. Multiple thicknesses and slopes available to accommodate specific job conditions with no waste, thus reducing disposal fees.

Sizes: Hinged Target Sumps ship 4' x 8' and unfold to 8' x 8', Standard Target Sumps are 4' x 4'

Compressive Strength: 25psi



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com