



NEW CONSTRUCTION OR RE-ROOF/TEAR OFF
PROJECTS WITH 1/2" SecurShield HD COATED
GLASS FACER

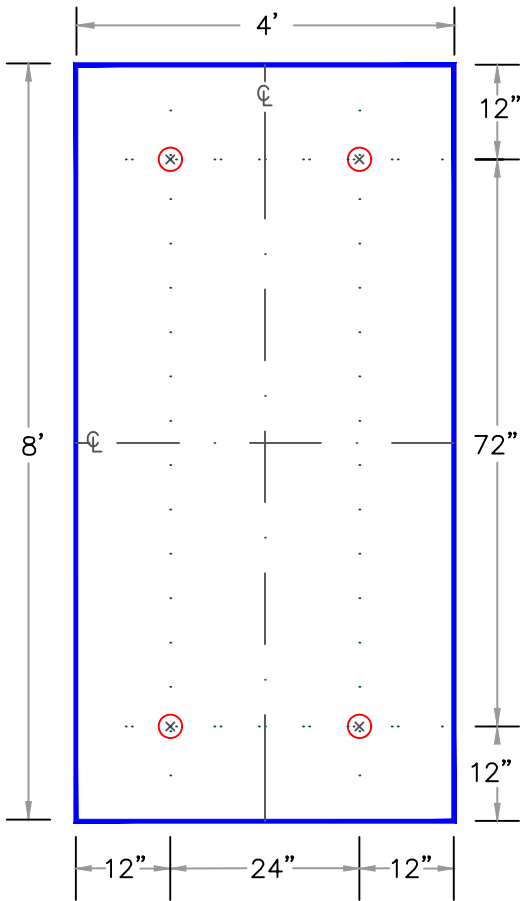

NEW CONSTRUCTION OR RE-ROOF/TEAR OFF
PROJECTS WITH 20 OR 25 PSI SecurShield ANY
THICKNESS

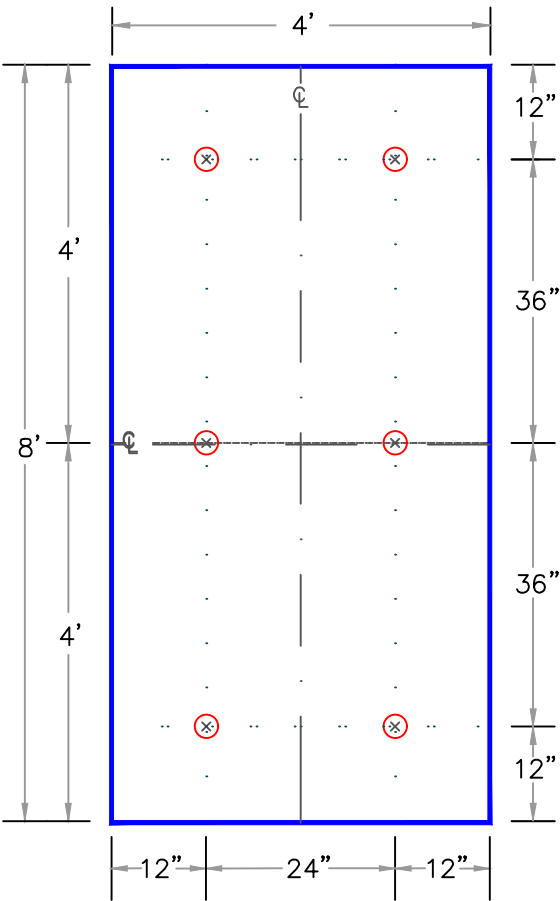

FEET TO CENTIMETERS	
4'	8'
122	244

	INCHES TO CENTIMETERS																
inch	1/4"	1/2"	3/4"	1"	1.5"	2"	2.5"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
cm	1	1.5	2	2.5	4	5	6.5	7.5	10	13	15	18	20	23	25	28	30



INSULATION/COVERBOARD
ATTACHMENT WHEN USING
SecurShield FAMILY
PRODUCTS FOR ALL
WARRANTIES LENGTHS

 → FASTENER & PLATE
 → CENTER LINE
 → GUIDE LINE

MECHANICALLY
ATTACHED SYSTEM

MA-27.5